
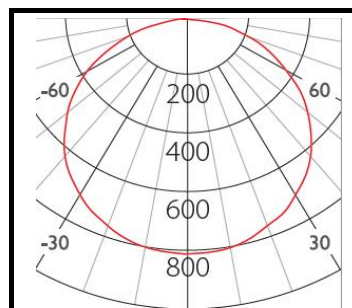
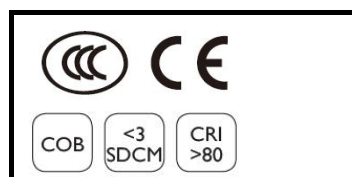


TROV ECO P1

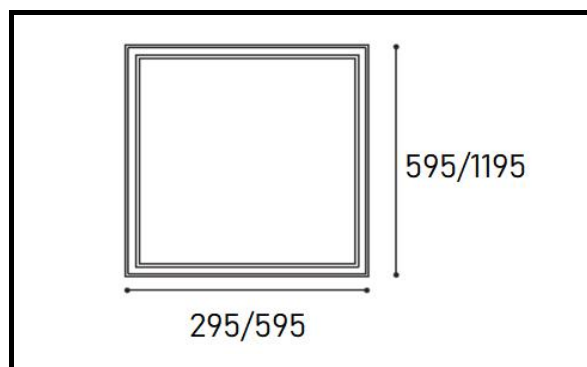

TROV ECO P1

LED CCT AVAILABLE
3000K
4000K
6000K

Dimension

295mm*1195mm*13mm
TROV ECO-W40-P1X4

595mm*595mm*13mm
TROV ECO-W40-P2X2

595mm*1195mm*13mm
TROV ECO-W80-P2X4

Product Description

Aluminium Die Casting;
Double powder Coating;
Recess/Suspend Luminaire;
2 cable entries. Through
wiring possible. (N/L)

LED module: High Power
COB

Protection mode IP20

Weight: 0.9kg

Beam Angle: 120deg

Technical data

Model	TROV ECO-W40-P2X2
Luminous flux	4000/6000/8000lm
Power Consumption	40W/60W/80W
Lumen Output	100lm/W
Lifetime	50K Hours
Power Factor	> 0.9
Color Rendering	> 80
SDCM	< 3
UGR	< 19
Lamp Type	Recess/Suspend Luminaire;
Beam Angle	120deg
Housing Material	Aluminium
Housing Color	White
Dimension	Refer Dimension Details
Dimmable	Available ON / OFF
	Optional: 0-10V/ DALI / TRIAC
	Optional: ZIGBEE

WETRONIC.