



# FLEXi-28

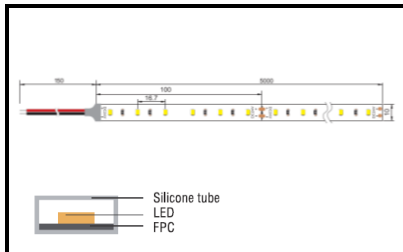

## FLEXi-28

LED CCT AVAILABLE

3000K

4000K

6000K

R / G / B

## Optional Color (CCT)

2700K

3500K

## Product Description

LED FLEXi Series;

Minimal Cut Length;

Flexible Light Source;

2 cable entries. Through

wiring possible. **(24Vdc)**

LED module: High Efficiency

SMD LED

Protection mode IP20/65/67

Weight: 0.3kg

Beam Angle: 120deg

5W-60PCS LED

10W-98PCS LED

15W-98PCS LED

24W-120PCS LED

## Technical data

Model Code	FLEXi28-W5-24V
Luminous flux	620/1200/1600lm/2000lm
Power Consumption	5W/10W/15W/24W
Lumen Output	>100lm/W
Lifetime	50K Hours
Power Factor	> 0.9
Color Rendering	> 80
SDCM	< 3
UGR	< 29
Lamp Type	Flexible Stripe
Beam Angle	120deg
Housing Material	N/A
Housing Color	N/A
Dimension	5000mm * Refer Dimension
Dimmable	Available ON / OFF Optional: 0-10V/ DALI / TRIAC

# WETRONIC.