
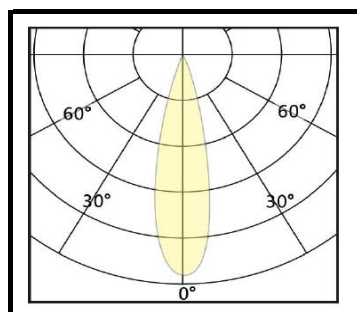
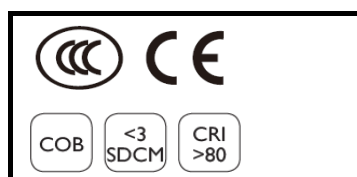


iCINIX-MARK1

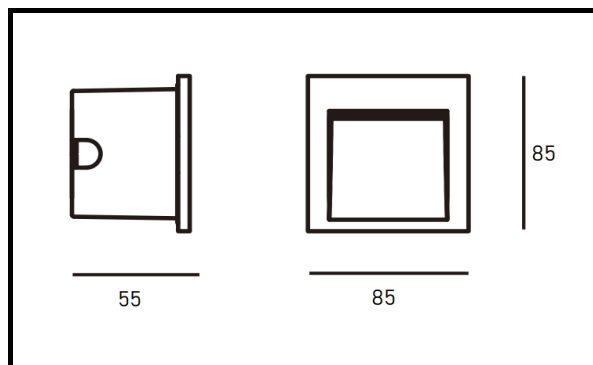


iCINIX-MARK1

LED CCT AVAILABLE
3000K
4000K
6000K
RED/GREEN/BLUE

Dimension

iCINIX-M1-W1.5
S85-85*85*85*55mm



Product Description

Aluminium Die Casting;
Double powder Coating;
Wall Down light up;
2 cable entries. Through
wiring possible. (DC5/12/24V)

LED module: Mid Power
Protection mode IP65
dust-protection & water
splashing protection
Weight: 0.8kg
Beam Angle: 120Deg
Maximum Wind Load
0.03m/2

Technical data

Model	iCINIX-M1-W1.5-S85
Luminous flux	150lm
Power Consumption	1.5W
Lumen Output	>100lm/W
Lifetime	50K Hours
Power Factor	> 0.9
Color Rendering	> 80 / 90
SDCM	< 3
UGR	< 19
Lamp Type	Skirting Luminaire
Beam Angle	100 deg
Housing Material	Aluminium Profile;
Housing Color	Powder Coating Dark Grey
Dimension	Refer Dimension Details
Dimmable	Available ON / OFF
	Optional: 0-10V/ DALI / TRIAC

WETRONIC.