
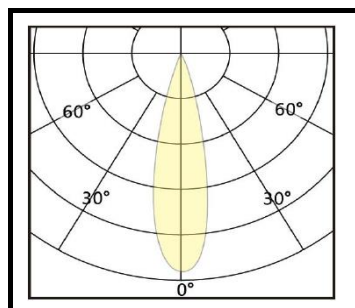
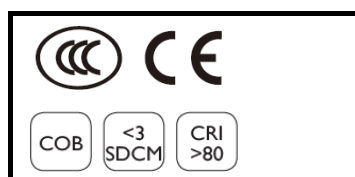


iSHOT FLEX3

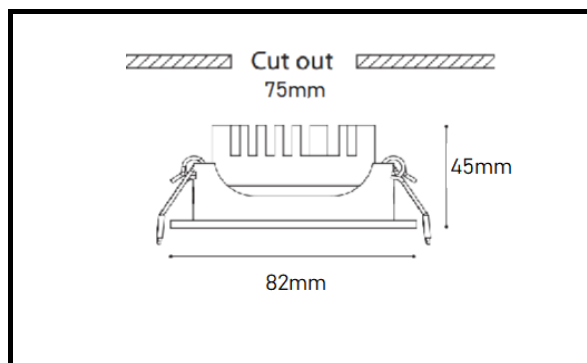

iSHOT-FLEX3

LED CCT AVAILABLE

3000K

4000K

6000K

Product Description

Aluminium Die Casting;
Double powder Coating;
Surface/Suspend Luminaire;
2 cable entries. Through wiring possible. (N/L)
LED module: COB
Protection mode IP20
Weight: 0.7kg
Beam Angle: 15/24/38
Dimension:
82mm x 45mm (75mm)

Technical data

Model	iSHOT FLEX3-W10-D38
Luminous flux	800lm
Power Consumption	10W
Lumen Output	80lm/W
Lifetime	30K Hours
Power Factor	> 0.9
Color Rendering	> 80 / 90
SDCM	< 3
UGR	< 19
Lamp Type	Recess Luminaire;
Beam Angle	15/24/36 deg
Housing Material	Aluminium
Housing Color	White / Black
Dimension	82mm x 45mm (75mm)
Dimmable	Available ON / OFF Optional: 0-10V/ DALI / TRIAC