
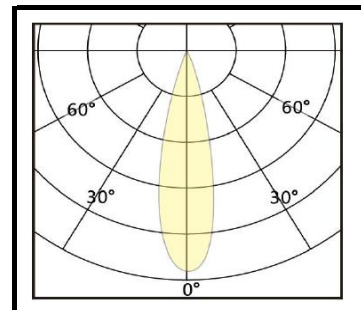
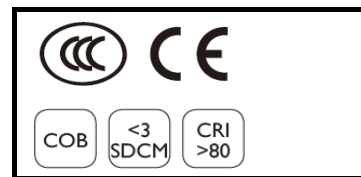


# ViLLA - T5

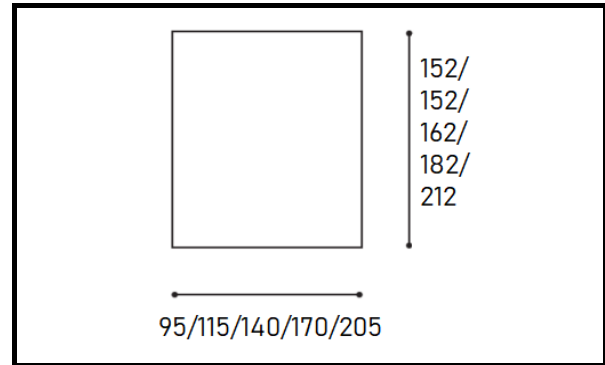

## ViLLA - T5

LED CCT AVAILABLE

3000K

4000K

6000K

## Optional Color (CCT)

2700K

3500K

## Dimension

15W: 95x152mm

25W: 115x152mm

35W: 140x162mm

45W: 170x182mm

60/80W: 205x212mm

## Product Description

Aluminium Die Casting;  
Double powder Coating;  
Suspend/Surface Luminaire;  
2 cable entries. Through  
wiring possible. (N/L)

LED module: High Power

COB

Protection mode IP20

Weight: 1.1kg

Beam Angle: 24/36deg

## Technical data

|                   |                               |
|-------------------|-------------------------------|
| Model             | ViLLA T5-W15-36D              |
| Luminous flux     | 1275/2125/2975/3825/5100lm    |
| Power Consumption | 15W/25W/35W/45W/60W/80W       |
| Lumen Output      | 85lm/W                        |
| Lifetime          | 50K Hours                     |
| Power Factor      | > 0.9                         |
| Color Rendering   | > 80 / 90                     |
| SDCM              | < 3                           |
| UGR               | < 19                          |
| Lamp Type         | Surface Mounted Luminaire;    |
| Beam Angle        | 24/36 deg                     |
| Housing Material  | Aluminium                     |
| Housing Color     | White / Black / W+B           |
| Dimension         | Refer Dimension Details       |
| Dimmable          | Available ON / OFF            |
|                   | Optional: 0-10V/ DALI / TRIAC |

**WETRONIC.**