
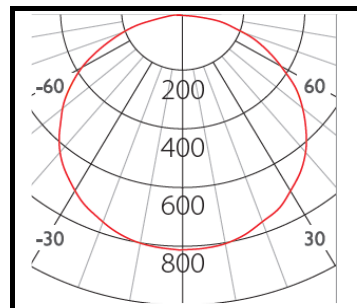


# FLEXiLINE-12S

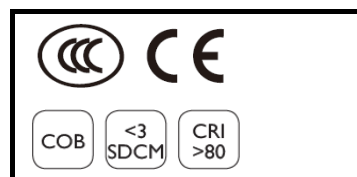

## FLEXiLINE-12S

LED CCT AVAILABLE

2700K

3000K

4000K

6000K

RED (620-630nm)

GREEN (520-530nm)

BLUE (465-475nm)

YELLOW (585-590nm)

RGB

## Product Description

Silicone Profile;

High IP Rated Protection;

LED Flexible Neon;

2 cable entries. Through wiring possible. (DC24)

LED module: High Efficiency

SMD LED

Protection mode IP65/67


Weight: 0.5kg

Beam Angle: 120deg

Cut: 50mm

## Bending Direction

SIDE-Bend (Max R150mm)



## Technical data

Model	FLEXiLINE12S-W10-24V
Luminous flux	200/400/600lm
Power Consumption	5W/10/15W
Lumen Output	>40lm/W
Lifetime	50K Hours
Power Factor	> 0.9
Color Rendering	> 80 / 90
SDCM	< 3
UGR	< 19
Lamp Type	Suspension Luminaire;
Beam Angle	120deg
Housing Material	Silicone Profile;
Housing Color	White / Black / Aluminium
Dimension	5000mm * 6mm * 12mm
Dimmable	Available ON / OFF
	Optional: 0-10V/ DALI / TRIAC

# WETRONIC.