




FLEXiLiNE-20T

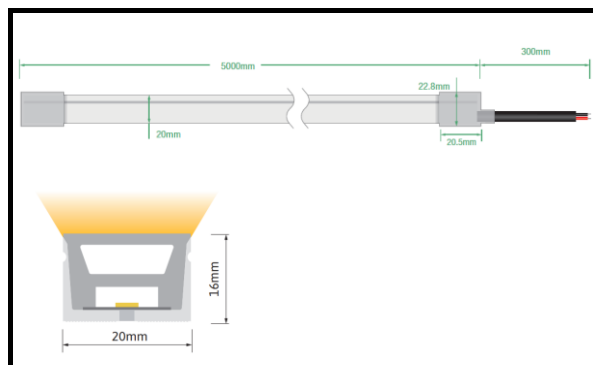

FLEXiLiNE-20T
LED CCT AVAILABLE
3000K
4000K
6500K
R / G / B
Amber
Pink

Product Description
LED FLEXiLiNE Series;
Minimal Cut Length;
Flexible Light Source;
2 cable entries. Through
wiring possible. (24Vdc)
LED module: High Efficiency
SMD LED
Protection mode IP44/IP67
Weight: 0.8kg
Beam Angle: 120deg
Cut: 50mm

Bending Direction
TOP-Bend (Max R150mm)

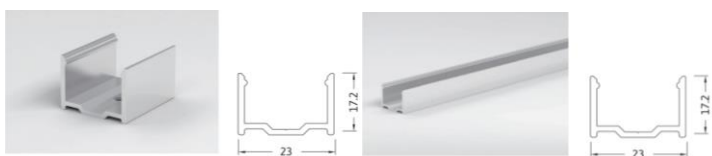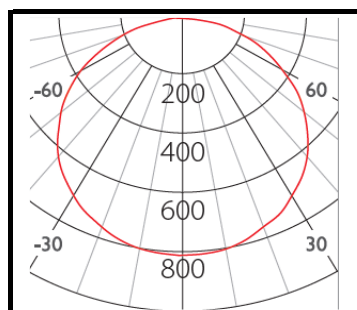

Technical data

Model Code	FLEXiLiNE20T-W20-24V
Luminous flux	780/1040/1300lm
Power Consumption	12W/16W/20W
Lumen Output	>65lm/W
Lifetime	50K Hours
Power Factor	> 0.9
Color Rendering	> 80
SDCM	< 3
UGR	< 29
Lamp Type	Flexible Neon
Beam Angle	120deg
Housing Material	Silicone
Housing Color	Silicone
Dimension	5000mm * 20mm * 16mm
Dimmable	Available ON / OFF

Optional: 0-10V/ DALI / TRIAC

WETRONIC.