
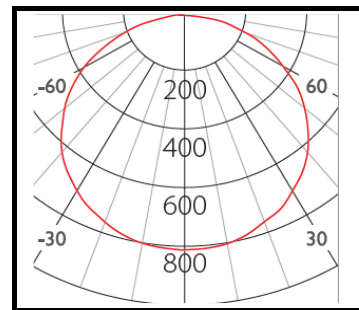


# FLEXiLiNE-30T

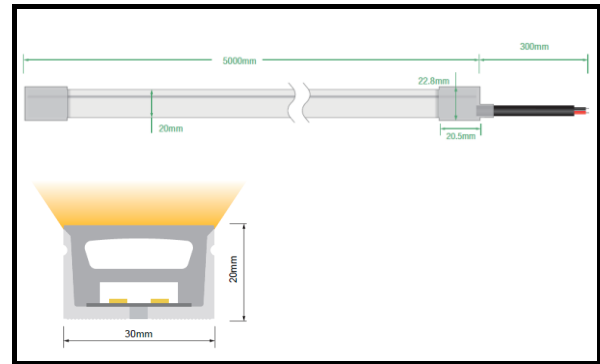

## FLEXiLiNE-30T

LED CCT AVAILABLE

3000K

4000K

6500K

R / G / B

Amber

Pink

## Product Description

LED FLEXiLiNE Series;

Minimal Cut Length;

Flexible Light Source;

2 cable entries. Through wiring possible. (24Vdc)

LED module: High Efficiency

SMD LED

Protection mode IP44/IP67


Weight: 0.8kg

Beam Angle: 120deg

Cut: 50mm

## Bending Direction

TOP-Bend (Max R150mm)

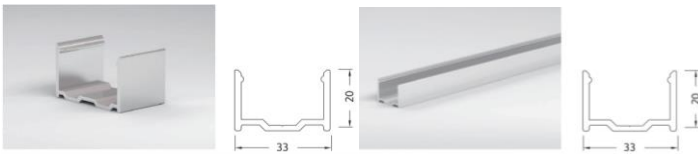

## Technical data

Model Code	FLEXiLiNE30T-W20-24V
Luminous flux	1067/1298/1534lm
Power Consumption	16W/20W/24W
Lumen Output	>65lm/W
Lifetime	50K Hours
Power Factor	> 0.9
Color Rendering	> 80
SDCM	< 3
UGR	< 29
Lamp Type	Flexible Neon
Beam Angle	120deg
Housing Material	Silicone
Housing Color	Silicone
Dimension	5000mm * 30mm * 20mm
Dimmable	Available ON / OFF
	Optional: 0-10V/ DALI / TRIAC

**WETRONIC.**