


FLEXi-50

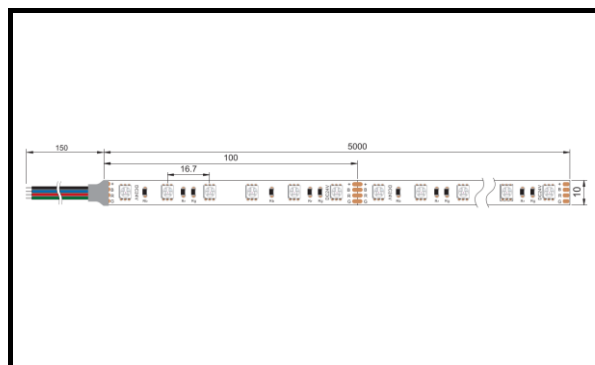

FLEXi-50
LED CCT AVAILABLE
RGB
RGBW


R: 620-630nm
G: 520-530nm
B: 465-475nm
W: 3000K/4000K/6000K

Dimension

15W RGB- 10*1.8mm (C 100mm)
20W RGBW- 12*1.8mm (C 100mm)

Product Description

LED FLEXi Series;
Minimal Cut Length;
Flexible Light Source;
2 cable entries. Through wiring possible. **(24Vdc)**
LED module: High Efficiency SMD LED
Protection mode IP20/65/67
Weight: 0.3kg
Beam Angle: 120deg
15W-60PCS LED
20W-60PCS LED(RGBW)

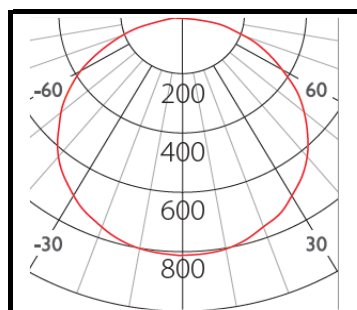

Technical data

Model Code	FLEXi50-RGB15-24V
Luminous flux	675/900lm
Power Consumption	15W/20W
Lumen Output	>45lm/W
Lifetime	50K Hours
Power Factor	> 0.9
Color Rendering	> 80
SDCM	< 3
UGR	< 29
Lamp Type	Flexible Stripe
Beam Angle	120deg
Housing Material	N/A
Housing Color	N/A
Dimension	5000mm * 10mm * 1.8mm
Dimmable	Available ON / OFF
	Optional: 0-10V/ DALI / TRIAC

WETRONIC.