

# Tiandy



TC-C32QN Spec: I5W/E/Y/4mm/V4.2

# 2MP Fixed Starlight IR Bullet Camera

LITE Series



## KEY FEATURES

- Metal+Plastic Housing
- Up to 1920x1080@25fps
- S+265/H.265/H.264
- Min. illumination Color: 0.02Lux@F1.6
- 2 Warm lights, 15m
- Smart IR, IR Range: 50m
- Built-in Mic
- Operating Conditions -30°~60°, 0~95% RH
- POE, IP67



Tiandy Technologies Co.,Ltd.

Email: [sales@tiandy.com](mailto:sales@tiandy.com)

Tel: +86-22-58596065

Website: [en.tiandy.com](http://en.tiandy.com)

Fax: +86-22-58596048



## SPECIFICATIONS

<b>Camera</b>	
Image Sensor	1/2.8" CMOS
Signal System	PAL/NTSC
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s to 1/100,000s
Day & Night	Dual IR Cut Filter with Auto Switch
WDR	Digital WDR
Angle Adjustment	N/A
<b>Lens</b>	
Lens Type	Fixed
Focal Length	4mm
Lens Mount	M12
Aperture Range	F1.6
<b>Illuminator</b>	
IR LEDs	2
IR Distance	Up to 50m
Wavelength	850nm
White LEDs	2
<b>Compression Standard</b>	
Video Compression	S+ 265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32kpbs~6Mbps
Audio Compression	G.711A/G.711U/ADPCM_D
Audio Sampling Rate	8kHz/32kHz/48kHz
<b>Image</b>	
Max. Resolution	1920x1080
Main Stream	PAL:25fps(1920x1080,1280x720,640x480,704x576)
	NTSC:30fps(1920x1080,1280x720,640x480,704x480)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360)
	NTSC:30fps(704x480,704x240,352x240,640x360)
Third Stream	N/A N/A
Image Setting	Saturation,brightness,contrast,sharpness,adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC/AGC
ROI	Yes,8 regions
OSD	16*16/32*32/48*48,adaptable size,Letters Such as Week,Date,Time,Total 1 Regions
Picture Overlay	N/A
Privacy Mask	Yes,4 regions
Defog	Yes


# Tiandy

<b>Feature</b>	
<b>Alarm Trigger</b>	Motion Detection,IP Address Conflict
<b>Video Analytics</b>	Tripwire,Perimeter
<b>Network</b>	
<b>ANR</b>	N/A
<b>Protocols</b>	HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,DHCP,DNS,Easy DDNS,NTP,QoS,IPv4
<b>System Compatibility</b>	CGI,MILSTONE
<b>Remote Connection</b>	2
<b>Client</b>	Easy7,EasyLive
<b>Web</b>	IE,Firefox,Edge,Safari,Chrome
<b>Interface</b>	
<b>Communication Interface</b>	1 RJ45 10M/ 100M self adaptive Ethernet port
<b>Audio I/O</b>	N/A
<b>Alarm I/O</b>	N/A
<b>Built-In Speaker</b>	N/A
<b>Reset Button</b>	N/A
<b>On-board storage</b>	N/A
<b>General</b>	
<b>Web Client Language</b>	18 languages Simplified Chinese/English/Traditional Chinese/Spanish/Italian/Korean/Turkish/Russian/Thai/ Polish/French/Dutch/Hebrew/Vietnamese/Arabic/German/Ukrainian/Portuguese
<b>Operating Conditions</b>	-30°C~60°C,0~95%RH
<b>Power Supply</b>	DC12±25%,POE,802.3af
<b>Protection</b>	IP67
<b>Boundary Dimensions</b>	161x68x66mm
<b>Package Dimensions</b>	175x85x85mm

\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

# Tiandy

## DIMENSIONS (Unit: mm)

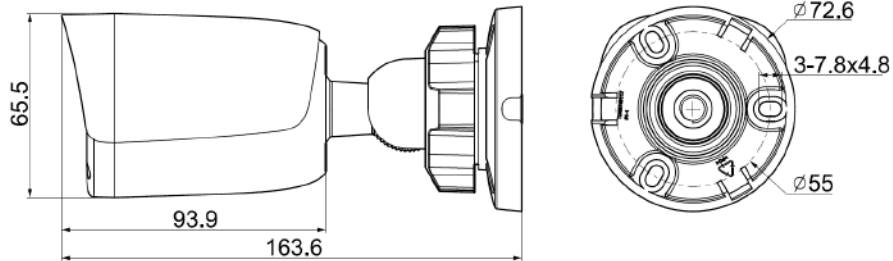

DISTRIBUTED BY



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048