

# Tiandy



TC-C35VN Spec:I3/E/Y/1.4mm/V4.2

# 5MP Fisheye Camera

Lite Series



## KEY FEATURES

- Plastic Housing
- Up to 2592x1944@25fps
- S+265/H.265/H.264
- Min. illumination Color: 0.02Lux@F2.0
- Smart IR, IR Range: 30m
- Audio I/O 1/1, Alarm I/O 1/1
- Support Tripwire, Perimeter, Double Tripwire
- Support Heatmap
- Built-in Mic, SD Card Slot
- Operating Conditions -10°~50°, 0~95% RH
- POE



Tiandy Technologies Co., Ltd.

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048



## SPECIFICATIONS

<b>Camera</b>	
Image Sensor	1/2.7"
Signal System	PAL/NTSC
Min. Illumination	Color:0.02Lux@(F2.0,AGC ON),B/W:0Lux with IR
Shutter Time	1s to 1/100,000s
Day&Night	Dual IR Cut Filter with Auto Switch
WDR	120dB
<b>Lens</b>	
Lens Type	Fixed
Focal Length	1.4mm
Lens Mount	M12
Aperture Range	F2.0
Field of View	Horizontal field of view:180°; Vertical field of view:180°;
<b>Illuminator</b>	
IR LEDs	3
IR Distance	Up to 30m
Wavelength	850nm
White LEDs	N/A
<b>Compression Standard</b>	
Video Compression	S+ 265/H.264B/H.264M/H.264H/Motion JPEG
Video Bit Rate	32kbps~16Mbps
Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
Audio Sampling Rate	8kHz/32kHz/48kHz
<b>Image</b>	
Max. Resolution	2592x1944
Main Stream	30fps(2592x1944,2560x1440,1920x1080,1280x720) N/A
Sub Stream	Max 30fps(704x576,640x360,704x288,352x288) N/A
Third Stream	Max 30fps(1920x1080,1280x720) N/A
Image Setting	Saturation,brightness,contrast,sharpness,adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC/AGC
ROI	Yes,8 regions
OSD	16*16/32*32/48*48/64*64/96*96,adaptable size,Letters Such as Week,Date,Time,Total 5 Regions
Picture Overlay	1
Privacy Mask	Yes,4 regions
Defog	Yes

# Tiandy

Feature	
Alarm Trigger	Voltage Alarm,Disk Full,Disk R/W Error,IP Address Conflict,MAC Address Conflict,FTP Server Exception ,Event Input, Event Output,Motion Detection,Mask Alarm
Video Analytics	Tripwire,Double Tripwire,Perimeter,Heatmap
Network	
ANR	Yes
Protocols	HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,IGMP,SNMP,DHCP,DNS,DDNS,Easy DDNS,NTP,SSL,802.1X,QoS,IPv4,IPv6,PPPOE,SSH,Unicast,Multicast,RTCP,ARP
System Compatibility	onvif Profile S/T/G,CGI,MILSTONE,RTMP
Remote Connection	2
Client	Easy7,EasyLive Plus
Web	IE,Firefox,Edge,Safari,Chrome
Interface	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	1/1
Alarm I/O	1/1
Built-In Mic	Yes
Built-In Speaker	N/A
Reset Button	Yes
On-board storage	Built-in MicroSD card slot,up to 512 GB
General	
Web Client Language	18 languages English,Russian,Spanish,Korean,Italian,Turkish,Simple Chinese,Traditional Chinese,Thai,French,Polish,Dutch,Hebrew,Arabic,Vietnamese,German,Ukrainian,Portuguese
Operating Conditions	-10°C~50°C,0~95%RH
Power Supply	DC12V±25%,PoE(802.3af)
Power Consumption	≤11W
Protection	N/A
Heater	N/A
Boundary Dimensions	122mmx122mmx37.5mm
Package Dimensions	138mmx138mmx110mm
GrossWeight	0.42kg
NetWeight	0.26kg


\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.

# Tiandy

## AVAILABLE MODEL

TC-C35VN Spec:I3/E/Y/1.4mm/V4.2

## DIMENSIONS

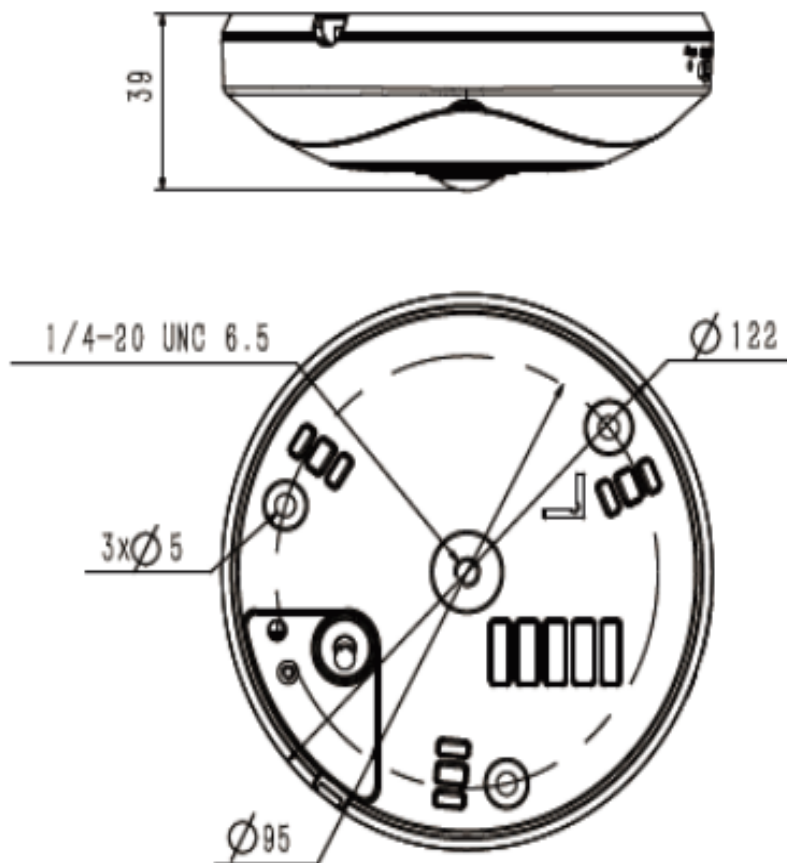

DISTRIBUTED BY



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)  
Website: [en.tiandy.com](http://en.tiandy.com)

Tel: +86-22-58596065  
Fax: +86-22-58596048