

The AIRFIX DRAW ALIGNER is an indispensable asset for auto-body specialists performing dent removal work. The patented design features a non-glued, recessed seal that can be changed in a matter of moments. In addition, 4 pads in the vacuum prevent the gasket from slipping, which makes it even more robust. It is easily one of the most reliable dent pulling systems on the market.

INNOVATIVE AND PATENTED DESIGN

- The suction cup plate is equipped with 4 rubber pads, which absorb the shearing forces when pulling.
- The surrounding seal is recessed without glue.
- The seal and the pads are easily replaceable.


POWERFUL AND EFFECTIVE PULLING

- Pulling capacity up to 350 kg across the whole height of the unit.
- Max. pulling height of 1.30 m.
- Crank winch with $\varnothing 6$ mm wire rope (1.5 ton tensile strength).
- Slide system to adjust the pulling height in seconds and without the need for any tools.
- Angled gear to facilitate downward pulling.

ERGONOMIC DESIGN

- Lightweight (31Kg) and easy to move with two wheels.
- Low noise level achieved by a high performance silencer.

OPERATION

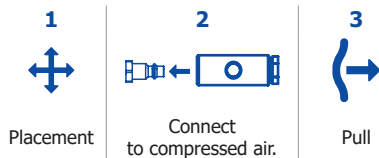

SPARE PARTS

Wire rope	079588	2.5m
Seal for plate	079571	1720mm


Change the height of the winch instantly without removing any parts

1.25 m

MADE IN FRANCE

Pulling force of 350 kg up to 1.3m

Supplied with 6-tooth claw



60 cm

37 cm

Seal

9 cm

118 cm

40 cm

4 pads prevent the seal from sliding off



kg

31 kg



max.

5 > 8 bar



R 1/4 