


SOUR GAS CHECK VALVES

BuTech ball check valves prevent reverse flow where leak-tight shutoff is not necessary. Standard materials of construction are 316 stainless steel with 17-4PH poppet for longer life, and 300 series stainless steel spring.

Note: For 316 stainless steel wetted parts, add **-316WP** to the catalog number.

Cracking pressure: 15 PSI (1 bar) approximate
 Operating Temperature Range:
 -420° to +1200°F
 (-251° to +648°C)

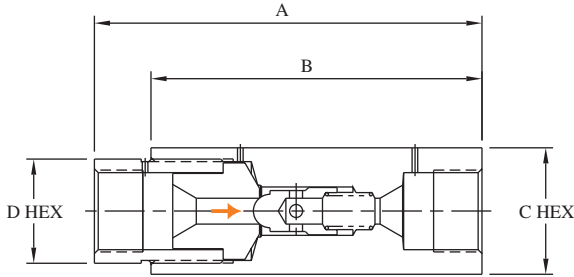

BALL CHECK VALVES


Catalog Number	Connection	MAWP	Cv	A	B	C	D
60BC4-SOG	1/4" H/P Tube	30,000 PSI 2070 bar	0.15	3.31" (84.1)	2.50" (63.5)	1.12" (28.4)	0.88" (22.4)
60BC6-SOG	3/8" H/P Tube	30,000 PSI 2070 bar	0.28	3.75" (95.3)	3.00" (76.2)	1.38" (35.1)	1.12" (28.4)
60BC9-SOG	9/16" H/P Tube	30,000 PSI 2070 bar	0.63	4.57" (116.1)	3.38" (85.9)	1.50" (38.1)	1.38" (35.1)

To order a valve with a cracking pressure other than the standard 15 PSI, add the cracking pressure to the end of the catalog number. Example: A 60BC9-SOG with 50 PSI cracking pressure would be ordered as **60BC9-SOG-50**.

Cracking pressures available up to 100 PSI (7 bar)

BuTech o-ring check valves reliably prevent backflow where leak-tight shutoff for liquids or gases is required. Standard materials of construction are 316 stainless steel with Buna-N o-ring and 300 series stainless steel spring.

Cracking pressure: 15 PSI (1 bar) approximate
 Operating Temperature Ranges:

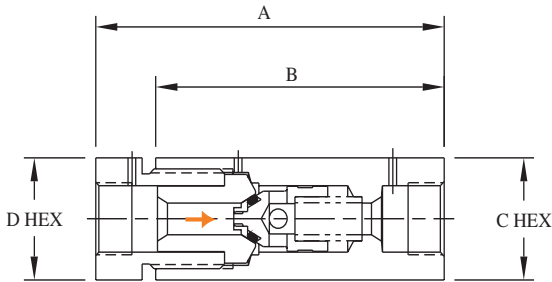

O-ring Material	Operating Temperature Range	Catalog Suffix
Buna-N	-65° to +250°F (-54° to +121°C)	----
Viton	-40° to +500°F (-40° to +260°C)	-VA
Teflon	-320° to +400°F (-195° to +204°C)	-TFE
Kalrez	-20° to +550°F (-29° to +288°C)	-HT

O-RING CHECK VALVES

Catalog Number	Connection	MAWP	Cv	A	B	C	D
60SC4-SOG	1/4" H/P Tube	30,000 PSI 2070 bar	0.15	3.31" (84.1)	2.50" (63.5)	1.12" (28.4)	0.88" (22.4)
60SC6-SOG	3/8" H/P Tube	30,000 PSI 2070 bar	0.28	3.75" (95.3)	3.00" (76.2)	1.38" (35.1)	1.12" (28.4)
60SC9-SOG	9/16" H/P Tube	30,000 PSI 2070 bar	0.63	4.57" (116.1)	3.38" (85.9)	1.50" (38.1)	1.38" (35.1)

To order a valve with a cracking pressure other than the standard 15 PSI, add the cracking pressure to the end of the catalog number. Example: A 60SC4-SOG with 40 PSI cracking pressure would be ordered as **60SC4-SOG-40**.

Cracking pressures available up to 100 PSI (7 bar)

All dimensions are for reference only and are subject to change.
 Dimensions in parentheses are millimeters (mm)