

LED SOLAR FLOOD LIGHT WITH MONOCRYSTALLINE SILICON SOLAR PANEL

APPLICATION



- Ideal for Parking Areas, Stadiums, Pathway, Garden and All Commercial and Residential Areas.

FEATURES

- Easy To Install and No Complicated Wiring Required.
- High Brightness and Long Life LED Chips.
- Solar Charging with LED Light Indicator.
- Solar Charging time 8 Hours.
- Working Time 10-12 Hours.
- Solid Aluminium Die-Casting Housing and Polycarbonate Material Diffuser.
- DC 3.2V Lithium-Ion Battery and 6Vac (20W/30W/40W) Monocrystalline Silicon Solar Panel.
- Intelligent Power Saving Design and Come with Remote Control (Manually ON/OFF, Brightness Level and Turn Off Timer).



MODEL	SYSTEM WATTAGE (W)	CCT (KT)	LUMEN (LM)	BATTERY CAPACITY	RECOMMEND HEIGHT (m)	NET WEIGHT (kg)	PACKING
BSSLFL-1150	150W	3000/6500	1800	15AH	2-4	2.3	8/CTN
BSSLFL-1300	300W	6500	3600	25AH	3-5	3.8	6/CTN
BSSLFL-1500	500W	6500	6000	35AH	4-6	4.7	4/CTN

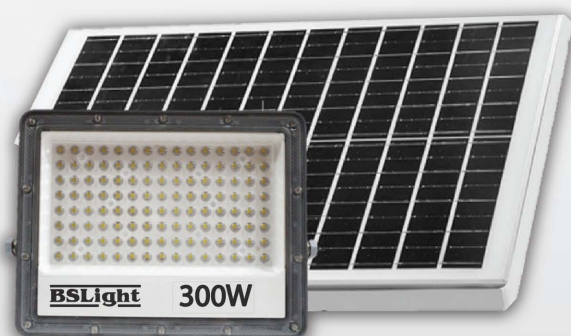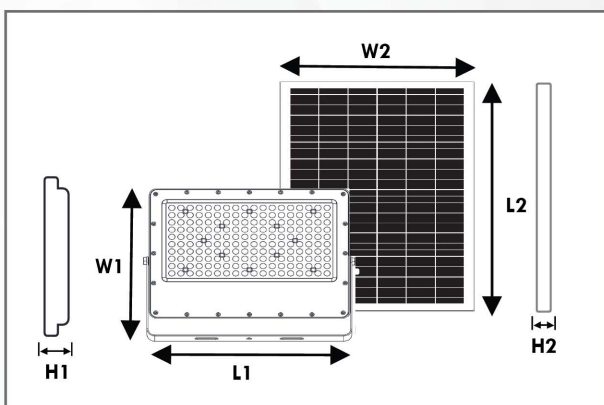

MODEL	SIZE (mm)					
	L1	W1	H1	L2	W2	H2
150W	205	171	44	350	350	17
300W	267	209	44	350	530	17
500W	330	250	44	350	700	17

