


**SMD Anti Corrosion Lamp  
(Weatherproof LED Strip Batten)  
With 40W LiFud Driver**


**APPLICATION**  
Parking area, canopy, loading bays, industrial, production area, integrated transit, factories, foundries and under canopy application.



- FEATURES**
- Excellent light distribution
  - Pleasant appearance and reduce direct glare
  - Operating temperature (Ta) -20°C ~ 40°C
  - High-pressure precision plastic injection moulding
  - IP 65 degree of protection against dust and water blasting.
  - Diffuser hinged to the body with stainless steel clip on toggles
  - UV protected polycarbonate diffuser with high impact resistance

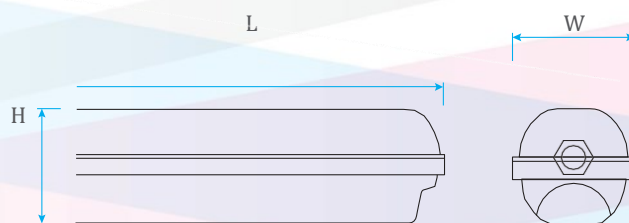

- LUMINAIRE SPECIFICATION**
- Light Source Type : SMD LED
  - Nominal efficacy : 100lm/W
  - Color Temperature (CCT) : Day Light (6500K)
  - Color Rendering Index (CRI) : ≥ 80
  - Driver : LIFUD (LF-FMR040YS0350H)
  - Main Voltage : 220-240Vac,
  - Power Factor : PF0.95
  - Body & Diffuser : High-impact polycarbonate material
  - Working Temperature : -20°C ~ 40°C
  - Color : Grey
  - Shelf life : 30,000 hours

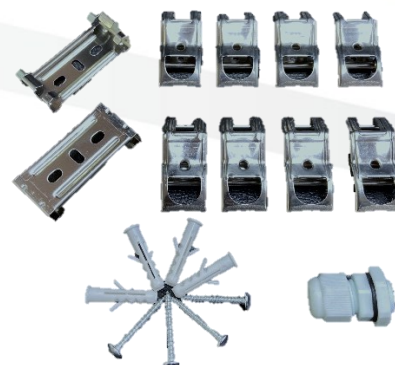

Model	Power (W)	Voltage (V)	CCT (K)	CRI	Lumen (lm)	PF	IP	Size L x W x H (MM)	Net Weight	Packing
BCR/SMD/40	40W	220-240V	6500K	> 80	4000lm	0.95	65	1200x85x80	1.2kg	8/CTN