




COMPOSITE HOSE -GG

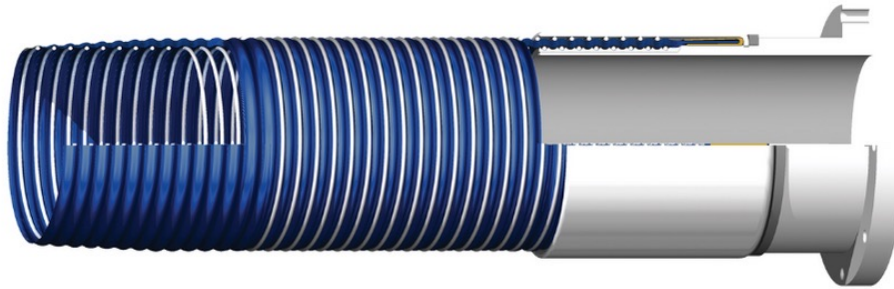

Application

Specially designed to convey under suction or pressure for various type of hydrocarbon and liquid chemicals.

Flow Master Hoses are used typically for rail and road tanker loading and unloading, storage, tank and in plant use.

Colour : BLUE

Inner Wire : Galvanized Steel (G)

Outer Wire : Galvanized Steel (G)

Temperature : -30 Degree Celsius to + 100 Degree Celsius

Constructed Material : Polypropylene PP tubes , films & fabrics

Cover : PVC Coated Polyester Cloth plus weather-proof and abrasion resistant cover.

Size		Maximum W.P		Bend Radius	Weight	Maximum Length	
mm	Inch	Bar	Psi	mm	Kg/Mtr	Mtr	Feet
25	1"	14	203	105	1.80	30	98
40	1 1/2"	14	203	150	1.90	30	98
50	2"	14	203	190	2.06	30	98
65	2 1/2"	14	203	225	2.70	30	98
76	3"	14	203	290	3.50	30	98
100	4"	14	203	320	5.44	30	98
150	6"	14	203	497	11.90	30	98
200	8"	14	203	740	21.50	30	98