




Oil Suction Hose 20 Bar

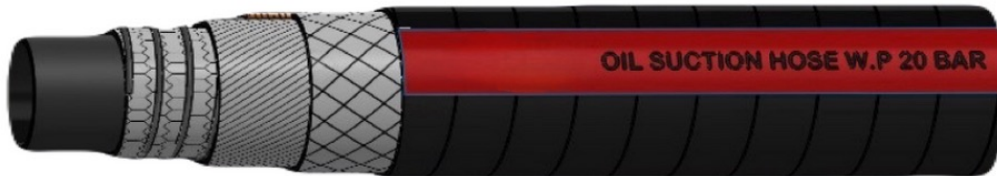

Application

Hardwall hose used for the suction of oil and petroleum based products.

Tube: Black color of NBR blend compound. Oil resistance.

Cover: Black color of NBR blend compound. Oil, abrasion and weather resistance.

Reinforcement: Multiple layers of high tensile synthetic cord and supported with helix wire.

Embedded with antistatic copper wire.

Temperature: -20°C to +90°C

Nominal inch	I.D (mm)	O.D (mm)	Pressure (bar)		Weight (Kg/m)	Length (m)
			Working	Burst		
1/2"	12.7	22.0	20	60	0.390	30
3/4"	19.0	29.0	20	60	0.580	30
1"	25.4	38.0	20	60	0.969	30
1-1/4"	31.8	44.0	20	60	1.080	30
1-1/2"	38.1	52.0	20	60	1.473	30
2"	50.8	65.0	20	60	1.933	30
2-1/2"	63.5	79.0	20	60	2.565	30
3"	76.2	92.0	20	60	3.000	30
4"	101.6	120.0	20	60	4.931	30
5"	127.0	146.0	20	60	5.594	30
6"	152.0	174.0	20	60	7.584	30
8"	203.2	228.0	20	60	10.541	12
10"	254.0	284.0	20	60	17.263	12
12"	304.0	335.0	20	60	22.490	12
14"	355.6	396.0	20	60	30.911	12
16"	406.0	450.0	20	60	37.907	12