



Before



After

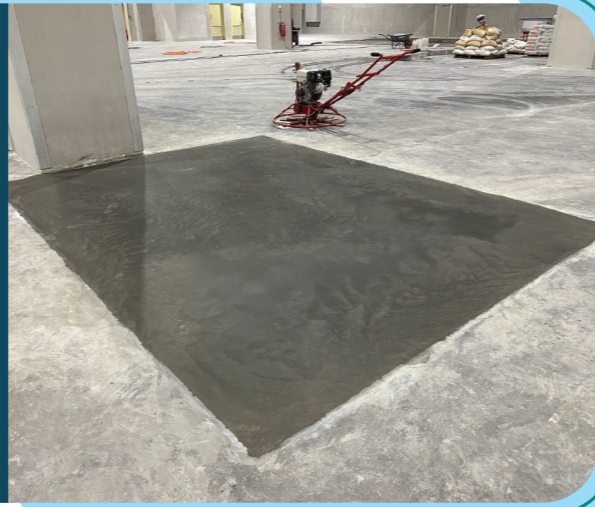

Before

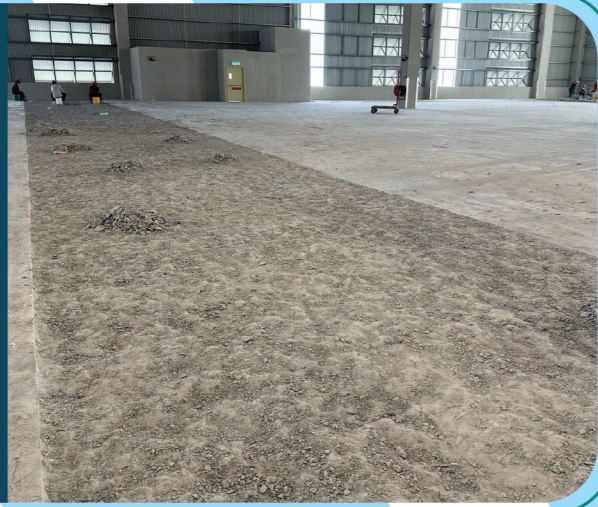

After



ZACKTOP
MICROCONCRETE TOPPING
Perfect Solution for Floor Defect Repair

ZACKLIM MARKETING SDN BHD

70, Jalan PJS 5/30, Petaling Jaya Commercial City (PJCC),
46150 Petaling Jaya, Selangor

Tel : +6 03-7782 2996 Email : zfs@zacklim.com



Repair for :



Delamination



Spalling



Hollow



Rough Surface




Undulating



Wide Cracks

ZackTop is a microconcrete topping layer to repair floor defects such as delamination, hollow, undulation, rough surfaces, etc. It is also a great solution for old floor refurbishment requiring only 10 mm – 40 mm thick without hacking too deep and affecting headroom. The Mors Hardness of 7 was achieved when tested, providing a dust-free surface for any industrial and commercial floors.

Sectional View

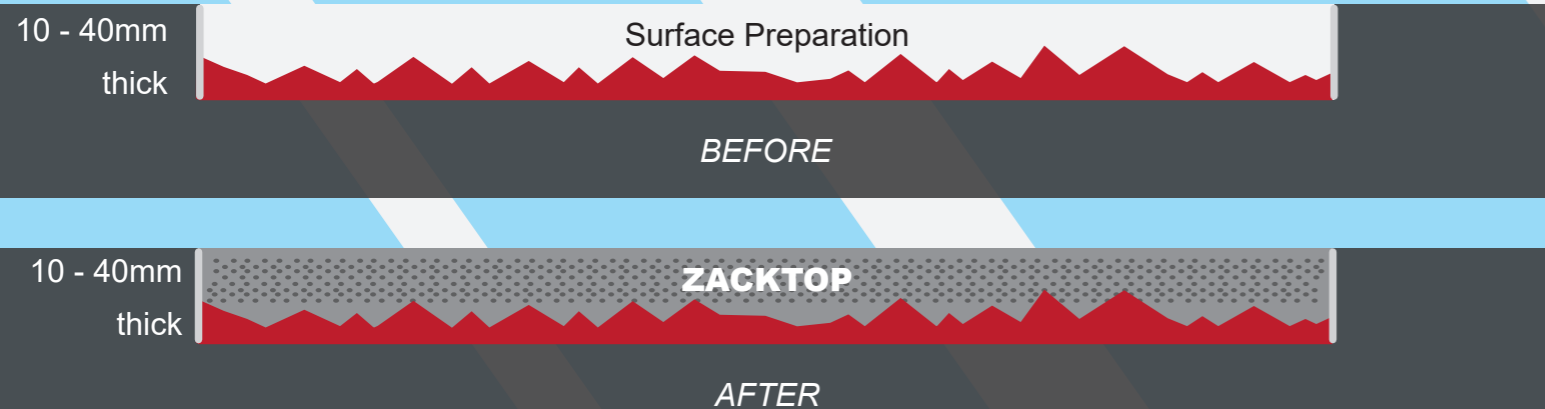

Process

1

Surface preparation



2

Apply bonding agent



4

Screeding



3

Mix ZACKTOP Material



5

Powerfloat



6

Finished Floor



Benefits

- Reduce hacking depth
- Cost effective to repair defects
- Minimize shrinkage cracks
- High early strength
- High abrasion resistance
- Strong to cater heavy vehicle and traffic
- Durable and dust-free

Technical Data

- Appearance: Natural Grey
- 1 bag of 25kg covers 1.1 – 1.3m² at 10mm thick
- Min. thickness : 10 mm
- Max. thickness : 40 mm
- Drying time : 4 hours
- Curing time : 1 day
- High early strength > 30 N/mm² @ 1 day
- Mohs Hardness Scale: 7