

Contact
+019-8685 301

Website
<https://www.cleanflow.com.my>

Address
No. 2-1, Jalan Op 1/6, One
Puchong Business Park, 47160
Puchong, Selangor



Grease Trap Biomatic Enzyme Pro



CleanFlow Biomatic Enzymes PRO break down complex wastes into simpler ones, specifically targeting FOG (fats, oils, and grease) like palm oil, preventing re-agglomeration. Traditional enzymes only emulsify FOG, causing issues down the line. Bacteria decompose organic matter but work slowly and don't break down FOG into smaller parts without sufficient time, oxygen, and appropriate temperature. Bioremediation uses microorganisms to eliminate pollutants. CleanFlow's dosing products, consisting of various enzymes, bacteria, or both, are chosen based on specific conditions and regulatory compliance.



Break Down Grease



Remove Odours



Anti Bacterial



Non-toxic

Specification

Biodegradable	: Yes
Foam	: Moderate
Hard Water Tolerance	: High
pH	: 7
Appearance	: Liquid Light Green
Odour	: Characteristics
VOC	: NIL
Effective pH Range	: 4.25-10
Shelf Life	: 12 months
Storage	: Cool and dry area

Products Highlight

- Fast digestive action for immediate grease and oil breakdown and odor control.
- Provides easier digestion of fatty acids by organisms
- Will not damage plumbing

Direction to use

Manual Dose

- Pour 75ml into the grease trap before start operation
- Pour 75ml after operation close every day


Auto Dosing Pump

- Setting 1 hour before business operation and 1 hour after business operation close

Packing

- 5 Liter

Figure 1

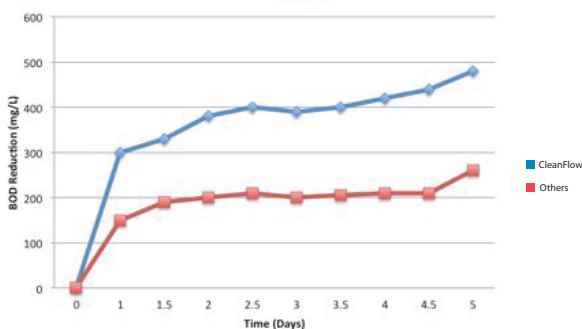

Recommended

Able use with
CleanFlow Auto Dosing Pump