

Contact  
+019-8685 301

Website  
<https://www.cleanflow.com.my>

Address  
No. 2-1, Jalan Op 1/6, One  
Puchong Business Park, 47160  
Puchong, Selangor



## Centralized Grease Trap

- Recommend Size for Small-Medium Factory or large workshop

Model

**GT-75GPM**

Flowrate

**75 GPM**

Size ( L X W X H )

**39" X 28" X 25" Inch**

Capacity | Daily Meal

**447 Liter | 600-1000**

Pipe Size


**4 Inch**

Material

**Stainless Steel Grade 304**

\* Upgrade available to Biomatic Grease Trap

\* Come with Checker Plate (Optional)

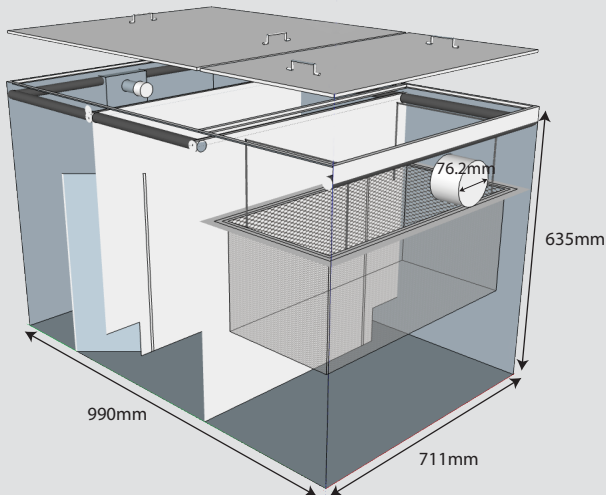

**The CleanFlow Centralized Grease Trap** is high Efficiency Industrial Grease Management System is a cost-effective, comprehensive solution to comply with DOE regulations for the proper separation of FOG from rinse water effluent. It comprises a professionally engineered physical grease interceptor system for efficient capture and retention of FOG. The drainage design of the system prevents cross-contamination of rainwater with oily rinse water effluent.

### Installation Preview



### Suitable For

- Restaurant Centralized Drainage
- Centre Kitchen Drainage
- Hospital or Institution
- Food Court
- Bars & Clubs
- Dish Washing Basin
- Dishes Washing Machine
- Heavy Sharing Washing Basin