


## 2X1000W 2U POWER AMPLIFIER with TFT DISPLAY

### FEATURES:

- ❖ HIGH PERFORMANCE FULL COPPER TRANSFORMER
- ❖ FRONT MOUNTED GAIN CONTROL FOR EASY ACCESS
- ❖ DUAL VARIABLE SPEED FANS
- ❖ SELECTABLE INPUT SENSITIVITY
- ❖ STEREO, PARALLE, BRIDGE MODE SELECTION
- ❖ BALANCED XLR INPUT
- ❖ SPEAKON AND BINDING POST SPEAKER OUTPUT
- ❖ STRONG BUILT METAL CHASSIS
- ❖ LARGE COLOR TFT DISPLAY

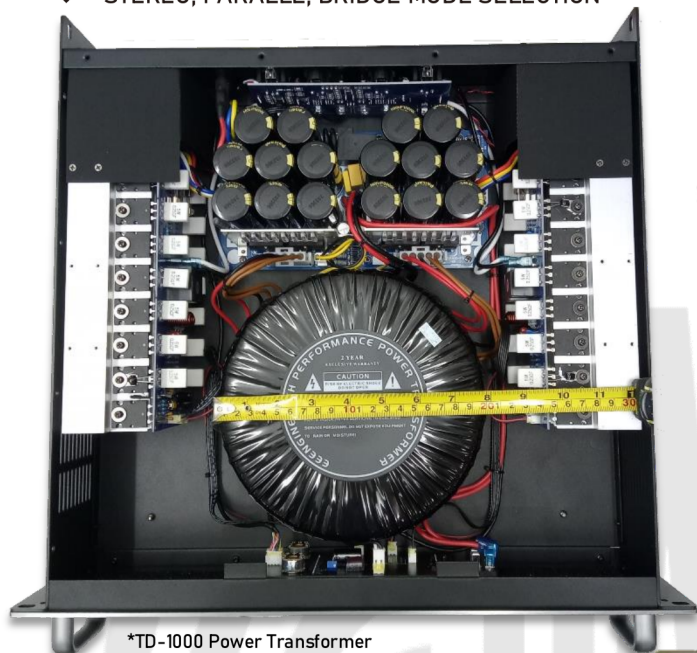

\*TD-1000 Power Transformer



\*Large Digital Display Screen



### Specification

Model:	TD1000
8Ω Output Power	1000W
4Ω Output Power	1320W
2Ω Output Power	1820W
8Ω Bridge Power	2450W
4Ω Bridge Power	3380W
THD+N(20Hz-20KHz)	<0.1%
Crosstalk	>70dB
Frequency Response	10Hz-20KHz, +0.5/-1.5dB
Input Sensitivity	0.775V / 1.V / 1.44V (SELECTABLE)
Input Impedance	BALANCED 20KΩ / UNBALANCED 10KΩ
Damping Factor	>300
Gain	43dB
S/N Rate	>110dB
Indicators	PROTECT, CLIP, SIGNAL, ACTIVE
Protect	SOFT START, DC, OVER VOLTAGE, OVERHEAT, SHORT CIRCUIT, OVERLOAD, PEAK CLIPPING
Dimension	486mm(L) x 430mm(W) x 90mm(H)
Gross Weight	21KG
Input Voltage	230V 50-60Hz