

VIVACE

REDEFINE
THE SPACE



Vivace Collection

Jfloor®
BY JUSGREAT

Inspired by the rhythm of quiet movement, Vivace brings a sense of effortless flow into the space it inhabits. Its presence is soft yet expressive, creating an atmosphere of warmth, balance, and understated refinement. Like a lingering melody carried through a room, the collection evokes comfort with a gentle sophistication that feels both contemporary and timeless.

REDEFINE THE SPACE





Vivace Q1466/01+Q1466A/01



Vivace Q1466/01+Q1466A/01









Vivace Q1466/07+Q1466A/01



Vivace Q1466/07+Q1466A/01















Vivace Q1466/04+Q1466A/01



Vivace Q1466/04+Q1466A/01



Vivace Q1466/05+Q1466A/01



Vivace Q1466/05+Q1466A/01




Vivace Q1466/07+Q1466A/01



Vivace Q1466/03+Q1466A/01




Vivace Q1466/06+Q1466A/01

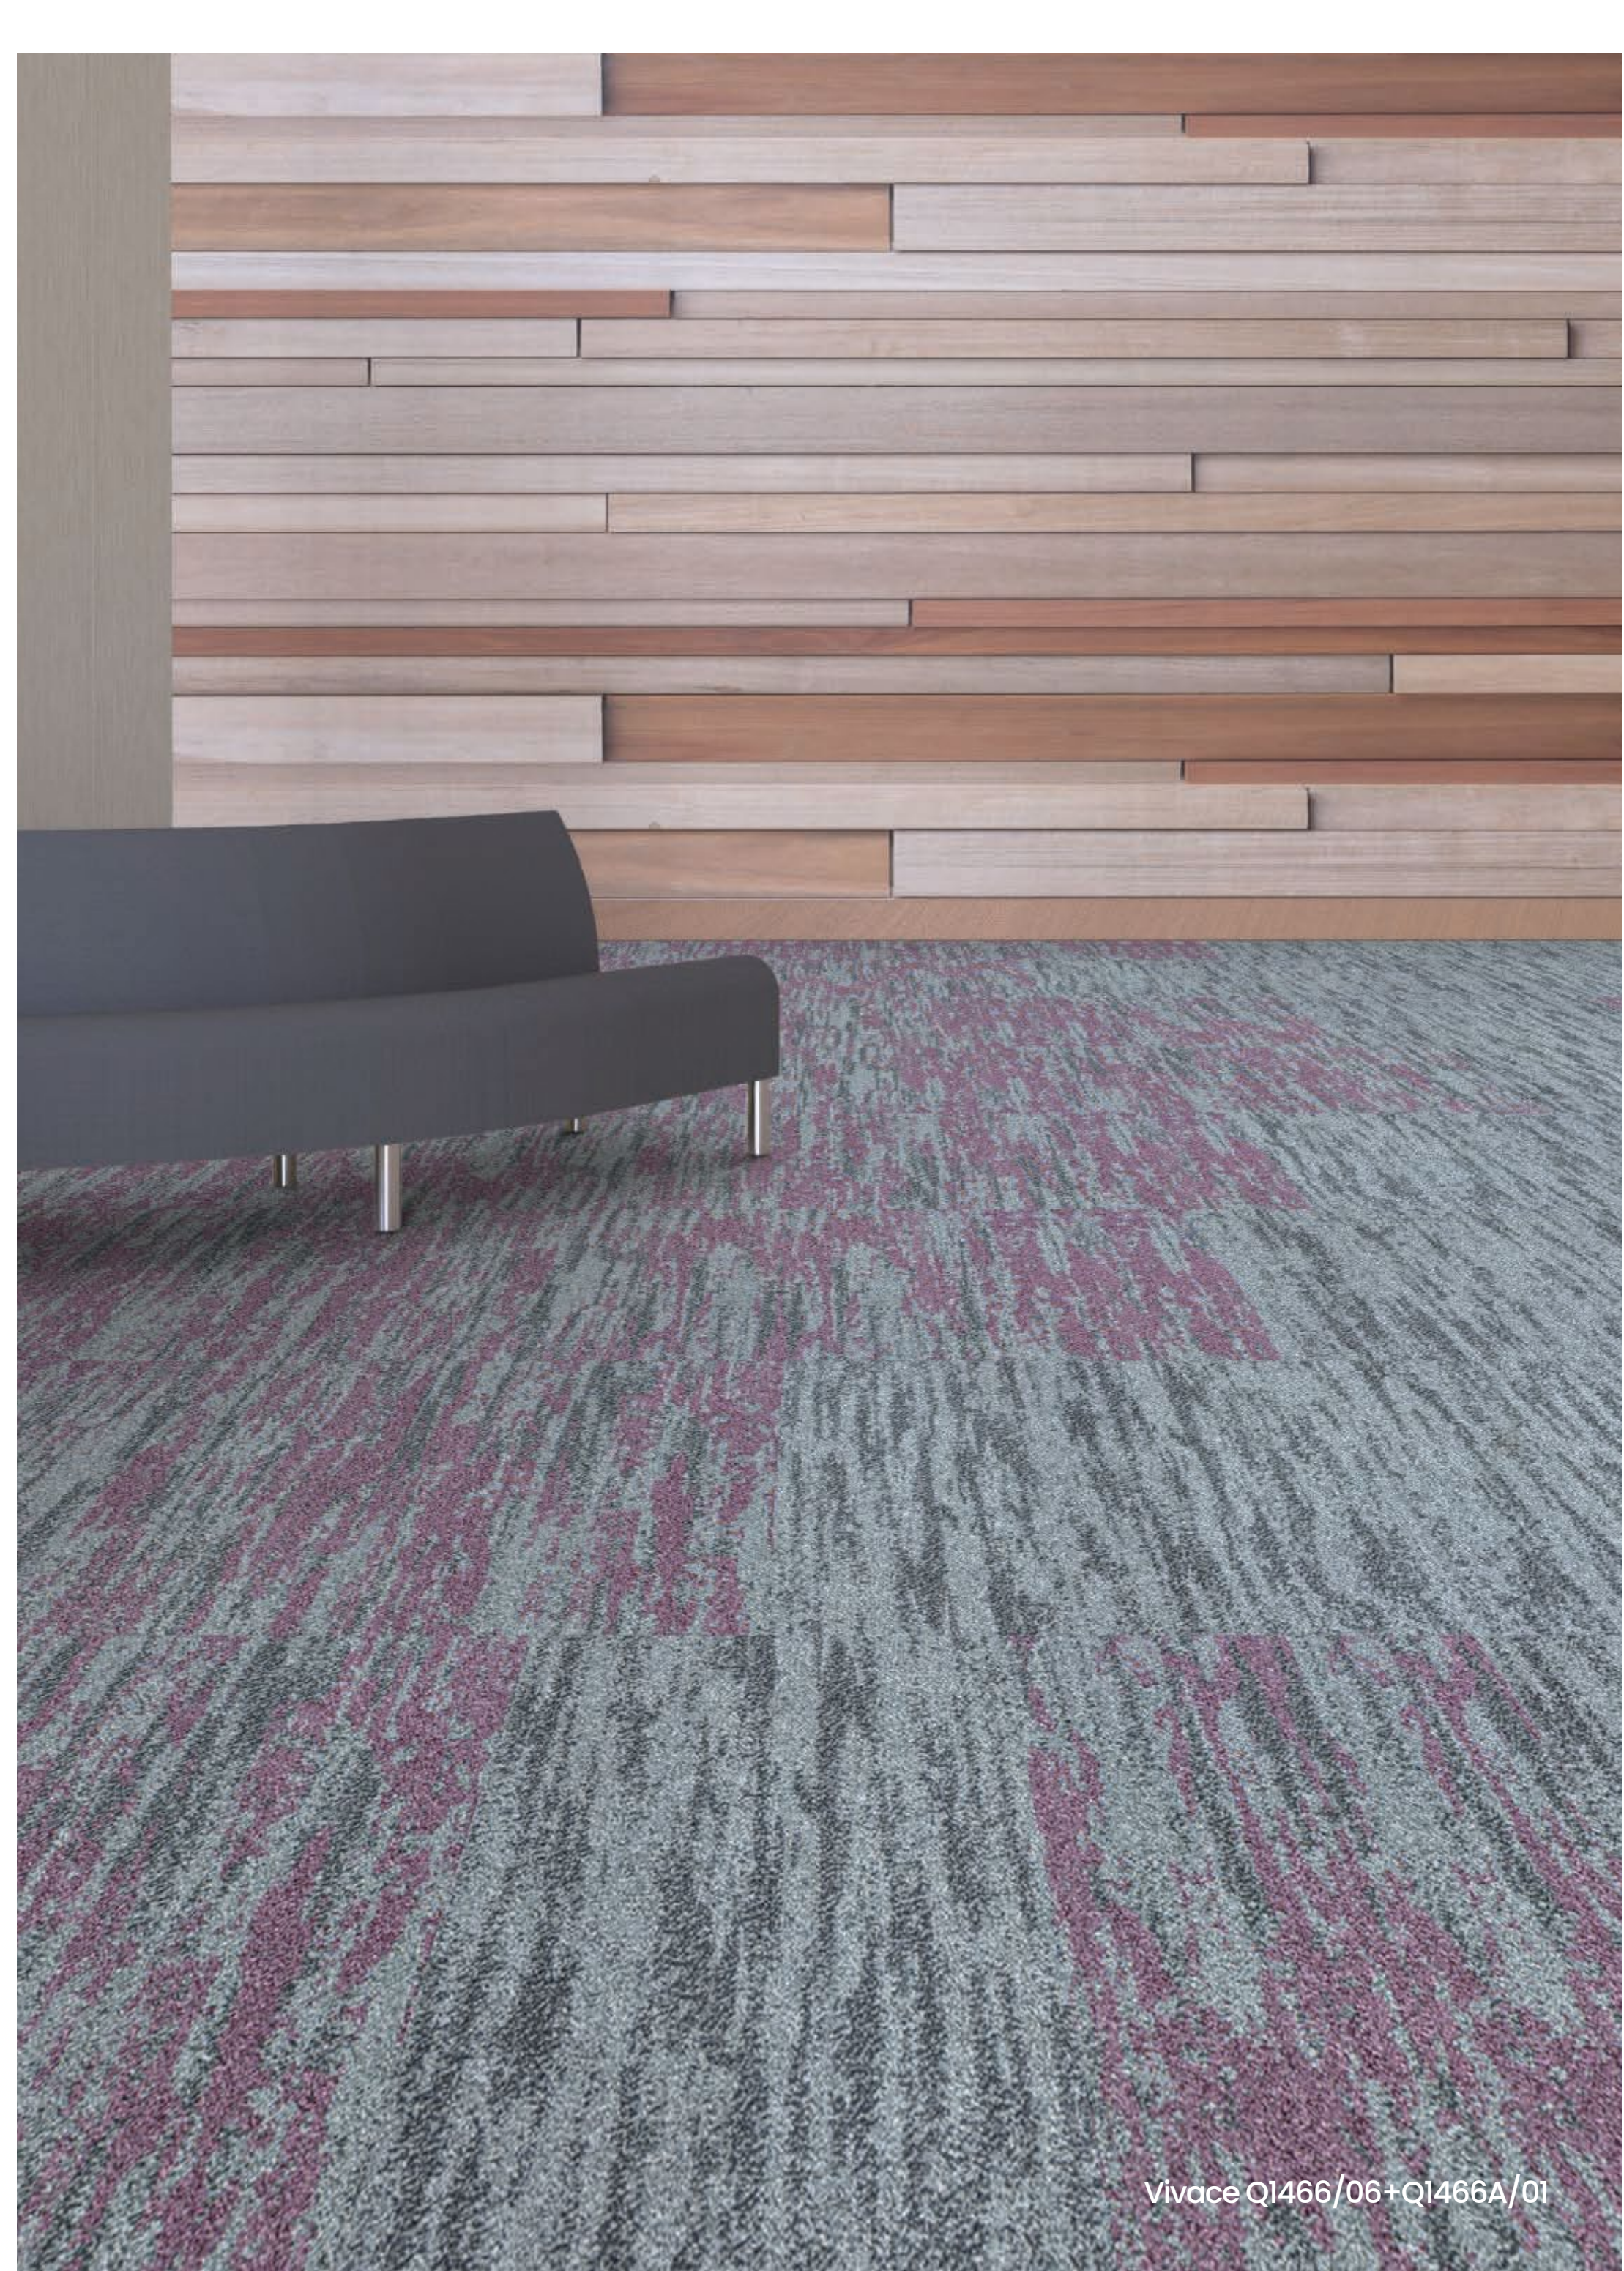


Vivace Q1466/06+Q1466A/01




A gentle echo of
movement and grace

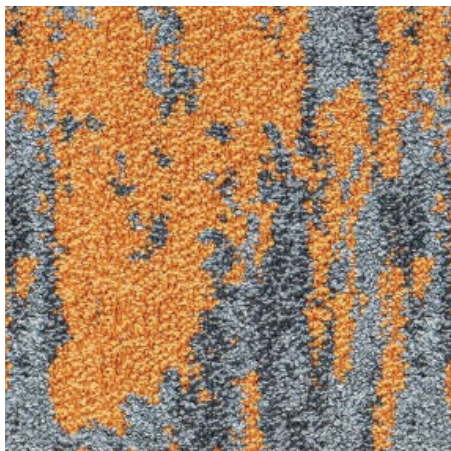


Q1466/01

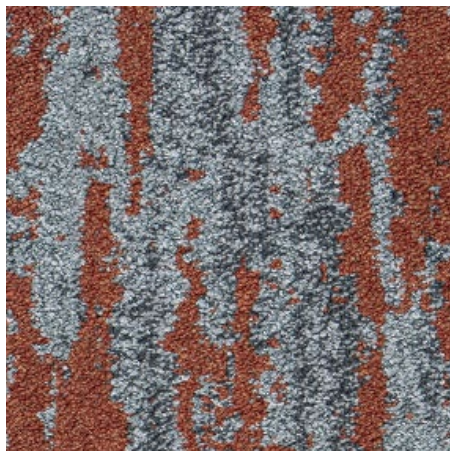



Q1466/02

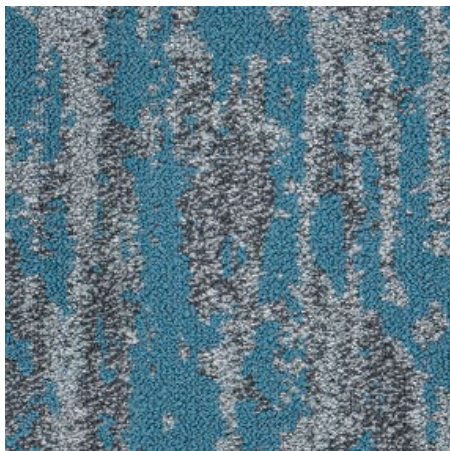


Q1466/03

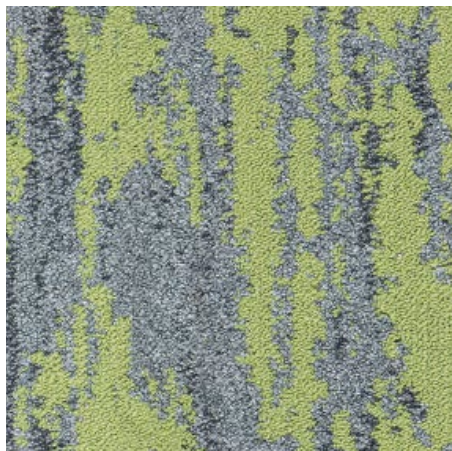


Q1466/04

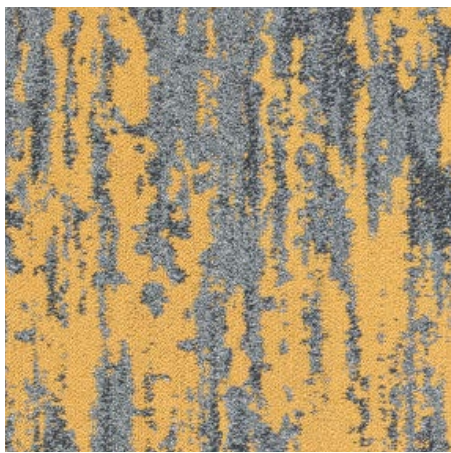


Q1466/05

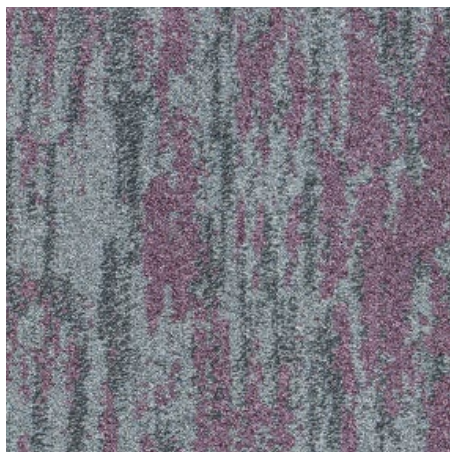

Q1466/06

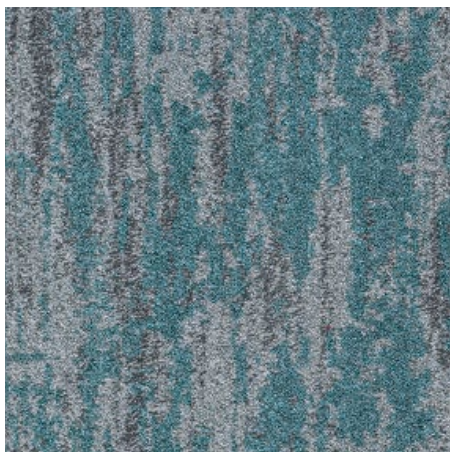

Q1466/07

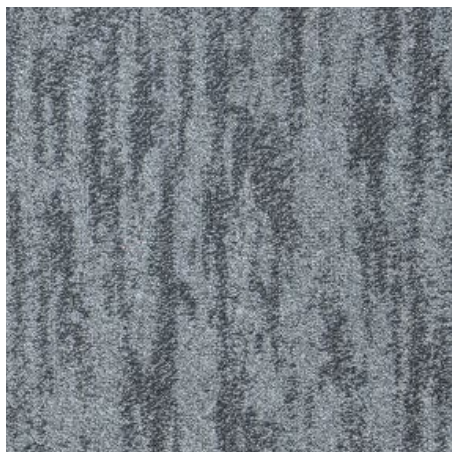

Q1466A/01



REDEFINE THE SPACE

Jfloor® *Luxe* 

VIVACE

SPECIFICATIONS

Construction	: Texture Loop Pile
Fiber	: 100% Solution Dyed Nylon
Gauge	: 1/12
Stitches	: 12 per inch
Average Pile Height	: 4mm±0.5mm
Total Thickness	: 7.5mm±0.5mm
Primary Backing	: Non-Woven Polyester
Secondary Backing	: PE or PVC Backing
Tile size	: 25cm x 100cm/ 50cm x 50cm

Area of Use	: Commercial – Heavy Duty
Flammability	: ASTM E 648 Class I
Smoke Density	: ASTM E 662 Less than 450
Stain Resistance	: AATCC-175-03 Rating 10
Static Propensity	: AATCC-134 ≤ 3.5kV

Installation Method

