



DAVIS®

Always Ahead™



Underfloor Trunking System

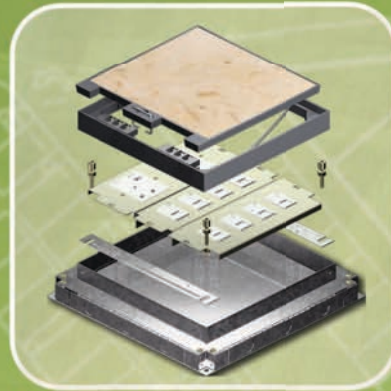

IEC BS CE

www.davis.com.my



Davis, well known for introducing modern underfloor cable management system 60 years ago, is a pioneer in cable management systems. Today, Davis remains at the forefront of the cable management industry.

With more than half a century of cable management leadership and technology, Davis continues to innovate and improvise its vast range of cable management products which complies with the most stringent technical specifications and the highest standards of today's modern office requirements.











Davis has of a team of dynamic and dedicated pool of design engineers and professional sales force, providing first class service and support for the company's wide range of products. Our people will always be there to ensure all its high-performance products meet the ever changing trends and demands of smart homes, stylish office designs, intelligent building structures and sophisticated monumental skyscrapers.


At Davis, we always produce what the market wants. We always keep up with new challenges of the electrical industry. Davis adopts a policy of continuous improvement, producing competitively priced products and is committed to give excellent customer service which keeps us *"Always Ahead"*.

With strategically located manufacturing and support facilities and an extensive distribution network across the region, Davis is well positioned to meet every exact need and requirement of our customers all over the world.

DAVIS range of products includes:-

- Modular Flushfloor Trunking System
- Raised Floor Trunking System
- Underfloor Trunking System
- Heavy Duty Underfloor Trunking System
- 63A 240/415V Raised Floor Bustrack System
- 200A – 6300A Busway System

	INTRODUCTION	1
	UNDERFLOOR TRUNKING	2
	UNDERFLOOR SERVICE BOXES	3 - 6
	UNDERFLOOR LAYOUT VIEW	7 - 8
	UNDERFLOOR JUNCTION BOXES	9 - 10
	TECHNICAL DATA	11 - 12
	LAYOUT DESIGN	13
	CABLE CAPACITY GUIDE	13
	INSTALLATION GUIDE	14
	ACCESSORIES	15 - 16

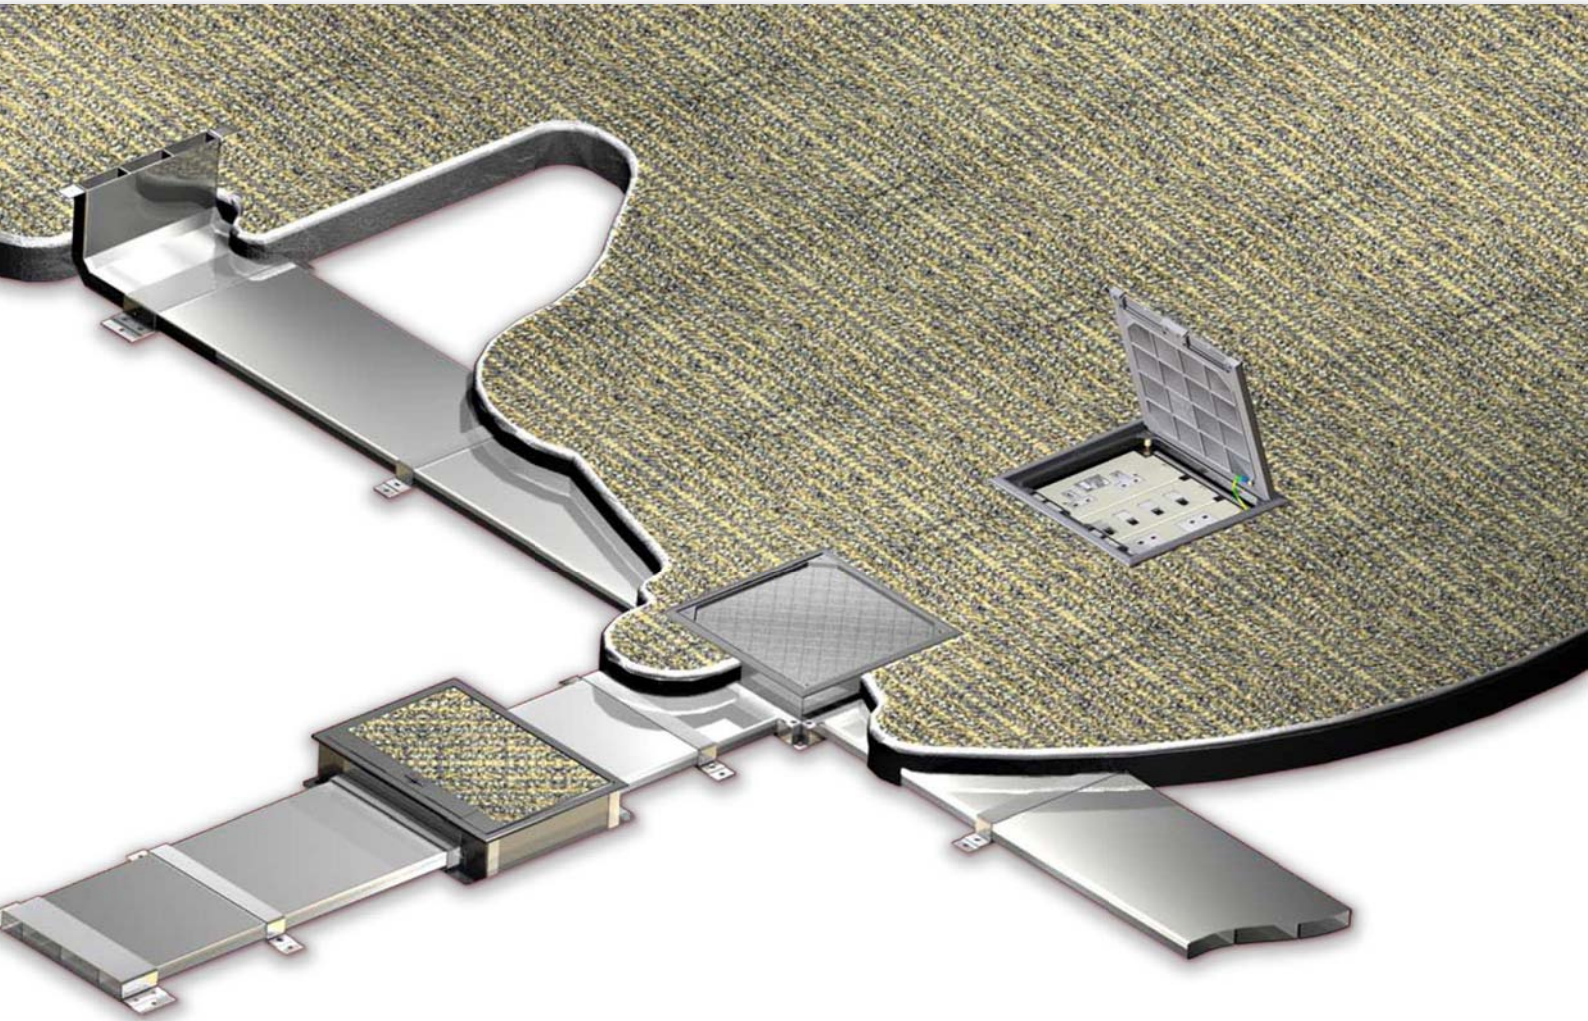

INTRODUCTION

DAVIS Underfloor Trunking System is designed for the distribution of power, voice and data services in floors where the trunking is buried in the screed. This system provides the simplest and most economical method of carrying services to feed a grid of outlet installation and can be used to integrate with perimeter or surface trunking systems.

DAVIS Underfloor Trunking System consists of the following components :

uPVC Underfloor Trunking
Vertical Access Boxes
Service Outlet Boxes


Metal Underfloor Trunking
Junction Boxes
Pedestal Boxes

FEATURE BENEFITS

- Constructed from pre-galvanized steel sheets in accordance with BS 4678 : Part 2, BS EN 50085-2-2 & IEC 61084-2-2.
- Trap & frame tested to withstand 4.5kN concentrated load. Underfloor trunking (screeded) tested to withstand 30kN concentrated load.
- The system incorporates numerous design features to ensure a fast and simple installation.
- Designed to support CAT 6 structured cabling systems.
- Suitable for screeded depth from 56mm to 80mm.
- Floor boxes are IP30 rated in accordance with BS EN 60529.
- Choice of 1, 2, 3 or 4 compartment floor boxes.
- Wide range of power and data accessories available to meet all requirements.

UNDERFLOOR TRUNKING

METAL TRUNKING

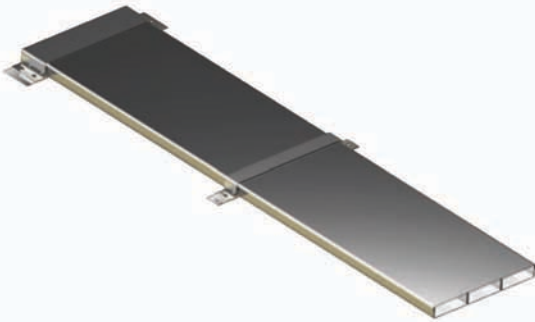

DAVIS Underfloor Trunking is produced from pre-galvanized steel sheets in accordance with BS 4678 : Part 2, BS EN 10327, IEC 61084-2-2 & BS EN 50085-2-2. This method of construction by utilizing channels avoids damage to its galvanized coating to prevent corrosion. This also adds strength to the section whilst allowing site adaptation, where necessary. The individual channels are held together by clamping saddles with connecting saddles for ducting joints. The trunking is produced in standard 2.3 or 2.44 meter lengths. Each trunking comes with 2 clamping saddles and a connecting saddle.

UPVC TRUNKING



UPVC UNDERFLOOR TRUNKING

Trunking Size W X H X T (mm)	No. of Compart.	Section Rectangular
50X25X2.5	1	P5025
75X25X2.5	1	P7525
75X25X3.2	1	P7532
100X25X2.7	1	P10027
100X25X3.2	1	P10032
75X38X3.2	1	P7532/38
100X38X3.2	1	P10032/38

*Std. Length 2.9 meters

UNDERFLOOR METAL TRUNKING

Trunking Size W X H (mm)	Model	
	1 Compart.	2 Compart.
150X25	UFT150/1/25	UFT150/2/25
150X38	UFT150/1/38	UFT150/2/38
	2 Compart.	3 Compart.
225X25	UFT225/2/25	UFT225/3/25
250X25	UFT250/2/25	UFT250/3/25
300X25	UFT300/2/25	UFT300/3/25
225X38	UFT225/2/38	UFT225/3/38
250X38	UFT250/2/38	UFT250/3/38
300X38	UFT300/2/38	UFT300/3/38

VERTICAL ACCESS BOX


For Trunking W X H (mm)	No. of Compart.	For uPVC Trunking	For Metal Trunking
150X25	1	UFV150/1/25/U	UFV150/1/25
150X25	2	UFV150/2/25/U	UFV150/2/25
225X25	2	UFV225/2/25/U	UFV225/2/25
225X25	3	UFV225/3/25/U	UFV225/3/25
250X25	3	UFV250/3/25/U	UFV250/3/25
300X25	3	UFV300/3/25/U	UFV300/3/25
150X38	1	UFV150/1/38/U	UFV150/1/38
150X38	2	UFV150/2/38/U	UFV150/2/38
225X38	2	UFV225/2/38/U	UFV225/2/38
225X38	3	UFV225/3/38/U	UFV225/3/38
250X38	3	UFV250/3/38/U	UFV250/3/38
300X38	3	UFV300/3/38/U	UFV300/3/38

SPECIFICATIONS

Pre-galvanized steel sheets to BS EN 10142 or BS EN 10327 or JIS G3302.

Body and Cover 1.6mm.

Other Underfloor Trunking sizes are also available. Please contact our sales office for further details.

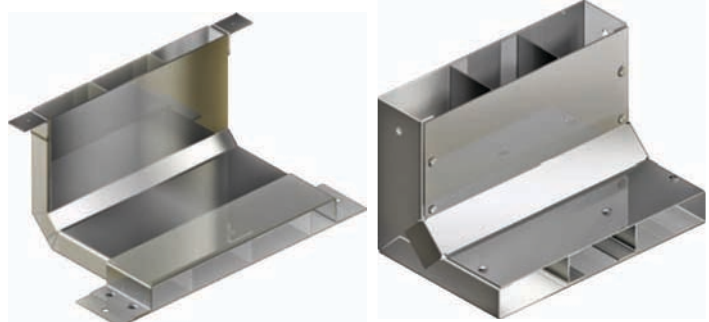


FOR METAL TRUNKING

FOR uPVC TRUNKING

UNDERFLOOR SERVICE BOXES



Die-cast Alloy Trap
& Nylon Frame
CP470/xxx

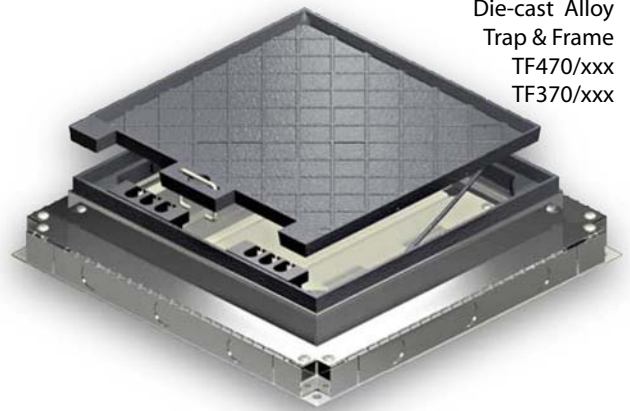

Die-cast Alloy
Trap & Frame
TF470/xxx
TF370/xxx

DIE-CAST ALLOY 6MM RECESS


L X W X H (mm)	Model		Trk Entry W X H (mm)
	2 Compart.	3 Compart.	
250X250X56	CP470/2/25	CP470/3/25	225X25
250X250X69	CP470/2/38	CP470/3/38	225X38

* The trap is made of high pressure die-cast alloy. The frame, grommet handles and hinges are moulded from flame retardant engineering plastics (Nylon 66) to give greater mechanical strength.

DIE-CAST ALLOY 9MM RECESS

L X W X H (mm)	Model		Trk Entry W X H (mm)
	2 Compart.	3 Compart.	
250X250X56	TF470/2/25	TF470/3/25	225X25
300X300X56	TF370/2/25	TF370/3/25	300X25
250X250X69	TF470/2/38	TF470/3/38	225X38
300X300X69	TF370/2/38	TF370/3/38	300X38

* The trap and frame are made of high pressure die-cast alloy.

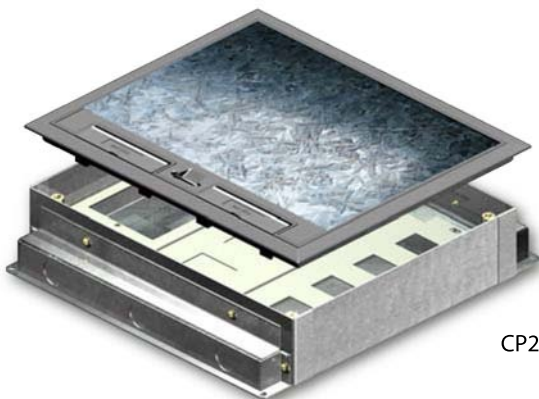

CP270/xxx



QUFSxxx

CP270 6MM RECESS

L X W X H (mm)	Model		Trk Entry W X H (mm)
	2 Compart.	3 Compart.	
270X230X56	CP270/225/2/25	CP270/225/3/25	225X25
270X230X69	CP270/225/2/38	CP270/225/3/38	225X38
270X230X56	CP270/250/2/25	CP270/250/3/25	250X25
270X230X69	CP270/250/2/38	CP270/250/3/38	250X38

* The trap and frame are moulded from flame retardant engineering plastics (Nylon 66) reinforced with pre-galvanized steel sheets infill plate.

QUANTEC 6MM RECESS


L X W X H (mm)	Model		Trk Entry W X H (mm)
	2 Compart.	3 Compart.	
339X244X56	QUFS225/2/25	QUFS225/3/25	225X25
339X244X56	QUFS250/2/25	QUFS250/3/25	250X25
339X244X56	QUFS300/2/25	QUFS300/3/25	300X25
339X244X69	QUFS225/2/38	QUFS225/3/38	225X38
339X244X69	QUFS250/2/38	QUFS250/3/38	250X38
339X244X69	QUFS300/2/38	QUFS300/3/38	300X38

* The trap and frame are moulded from high impact flame retardant ABS plastic reinforced with pre-galvanized steel sheets infill plate.

UNDERFLOOR SERVICE BOXES



CP270 SERVICE BOX

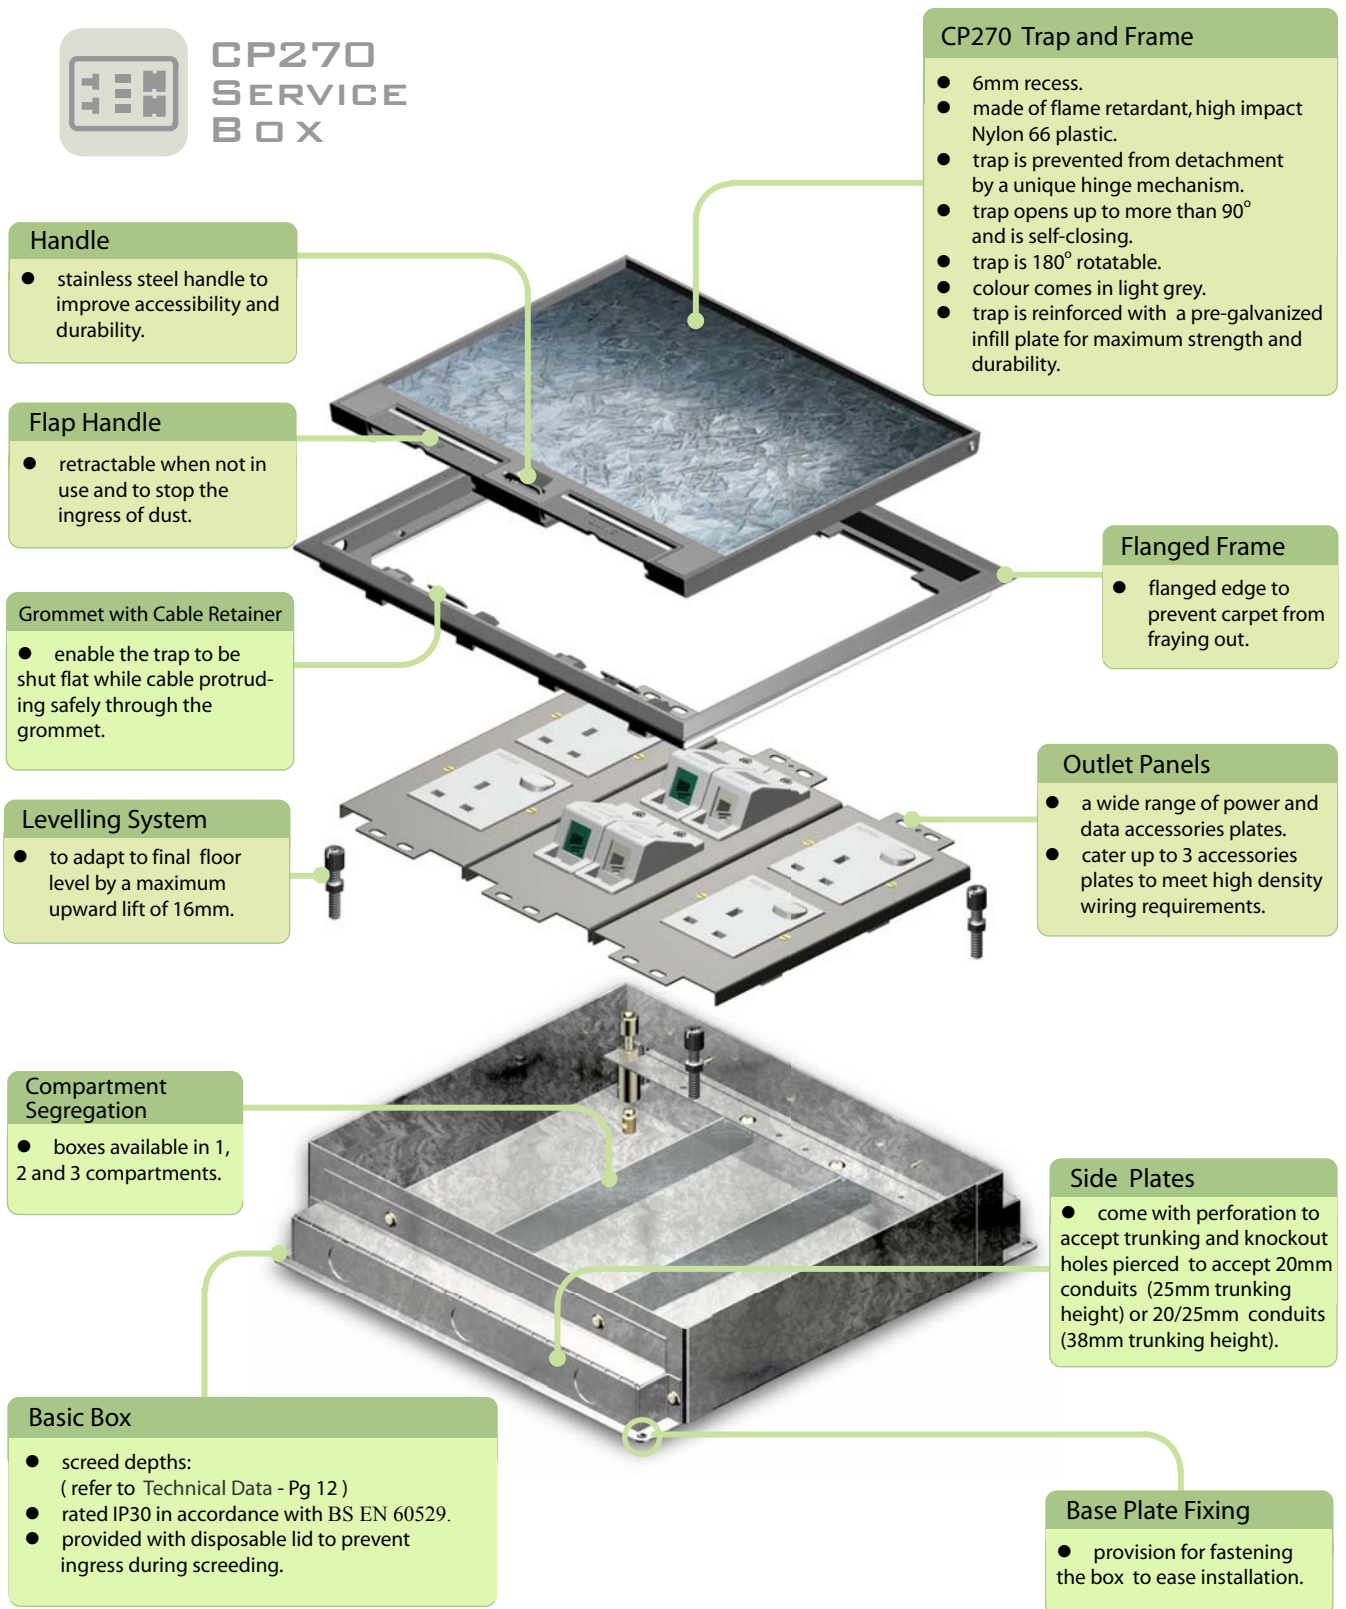

SPECIFICATIONS


Basic Box:

Pre-galvanized steel sheets to BS EN 10142, BS EN 10327 or JIS G3302.

UNDERFLOOR SERVICE BOXES



CP470
SERVICE
BOX



Flap Handle with Cable Retainer

- enable the trap to be shut flat while cable protruding safely through the grommet.

Levelling System

- to adapt to final floor level by a max upward lift of 12mm. (refer to Pg 12 for details)

Compartment Segregation

- boxes available in 1, 2 and 3 compartments.

Basic Box

- screed depths: (refer to Technical Data - Pg 12)
- rated IP30 in accordance with BS EN 60529.
- provided with disposable lid to prevent ingress during screeding.

Trap and Frame

- 6mm recess.
- available in metal and die-cast alloy.
- trap is prevented from detachment by a unique hinge mechanism.
- sizes 125x125 & 125x250 available in pre-galvanized steel sheets with epoxy finish.
- trap opens up to 180° flat.

Frame

- flanged edge to prevent carpet from fraying out.

90° Box Rotation

- via brackets that can be installed in either of 2 sides (for square box only).

Side Plates

- come with perforation to accept trunking and knockout holes pierced to accept 20mm conduits (25mm trunking height) or 20/25mm conduits (38mm trunking height).

Base Plate Fixing

- provision for fastening the box to ease installation.

SPECIFICATIONS

Basic Box:

Pre-galvanized steel sheets to BS EN 10142, BS EN 10327 or JIS G3302.

UNDERFLOOR SERVICE BOXES



TF470 SERVICE BOX

Handle

- stainless steel handle to improve accessibility and durability.

Trap and Frame

- 9mm recess.
- available in die-cast alloy.
- trap is prevented from detachment by a unique hinge mechanism.
- sizes 125x125 & 125x250 available only in pre-galvanized steel sheets with epoxy finish.
- trap opens up to 180° flat.



Grommet with Cable Retainer

- enable the trap to be shut flat while cable protruding safely through the grommet.



Levelling System

- to adapt to final floor level by a maximum upward lift of 12mm. (refer to Pg 12 for details)

Compartment Segregation

- boxes available in 1, 2 and 3 compartments.

90° Box Rotation

- via brackets that can be installed in either of 2 sides (for square box only).

Side Plates

- come with perforation to accept trunking and knockout holes pierced to accept 20mm conduits (25mm trunking height) or 20/25mm conduits (38mm trunking height).

Basic Box

- screed depths: (refer to Technical Data - Pg 12)
- rated IP30 in accordance with BS EN 60529.
- provided with disposable lid to prevent ingress during screeding.

Base Plate Fixing

- provision for fastening the box to ease installation.

SPECIFICATIONS

Basic Box:

Pre-galvanized steel sheets to BS EN 10142, BS EN 10327 or JIS G3302.

UNDERFLOOR LAYOUT VIEW

VERTICAL ACCESS BOX

- is specifically designed to access the electrical distribution system or a surface trunking system.

TRUNKING SYSTEM

- constructed from pre-galvanized steel sheets in accordance with BS 4678 : Part 2, BS EN 50085-2-2 & IEC 61084-2-2. Tested under screeding to withstand 30kN concentrated load.

FLOOR FINISHING

- wide range of sizes are available to suit various finishings such as carpet, vinyl tiles, ceramic tiles, marble and wooden floors.

CLAMPING SADDLE

- used to fix the trunking to the base floor.

CONNECTING SADDLE

- used to secure 2 lengths of trunking together without the ingress of screed during screeding.



ACCESSORIES


- a full range of accessories such as floor pedestal boxes, round grommets, extension screw terminals, offsets, etc., are available.

TRAP / FRAME

- wide range of sizes of trap / frame engineered from high pressure die-cast alloy with epoxy finish or engineering plastics are available.

SERVICE OUTLET BOX

- adapts to a universal range of panel-mounted accessories for power, data and voice services.



SAFE EARTHING

- A separate earth wire is attached from the basic box to the trap to provide 100% earth continuity.




PRE-GALVANIZED STEEL FLYOVER

- a two-piece flyover to ease the pulling of cables.
- compartment segregation and protection from electromagnetic interferences via a steel flyover in compliance with IEE regulations.




DISPOSABLE LID

- floor box is provided with disposable lid to prevent ingress during screeding.



UNDERFLOOR JUNCTION BOXES

Die-cast Alloy Trap
& Nylon Frame
CP460/xxx

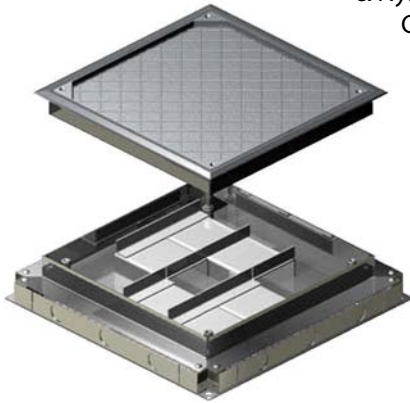

DIE-CAST ALLOY 6MM RECESS

L X W X H (mm)	Model		Trk Entry W X H (mm)
	2 Compart.	3 Compart.	
250X250X56 250X250X69	CP460/2/25 CP460/2/38	CP460/3/25 CP460/3/38	250X25 250X38

* The trap is made of high pressure die-cast alloy. The frame, grommet handles and hinges are moulded from engineering plastic (Nylon 66) which gives greater mechanical strength.

DIE-CAST ALLOY 9MM RECESS

L X W X H (mm)	Model		Trk Entry W X H (mm)
	1 Compart.		
125X125X56 125X125X69	TF125/1/25 TF125/1/38		125X25 125X38
	2 Compart.	3 Compart.	
250X250X56 250X250X69	TF460/2/25 TF460/2/38	TF460/3/25 TF460/3/38	250X25 250X38
300X300X56 300X300X69	TF360/2/25 TF360/2/38	TF360/3/25 TF360/3/38	300X25 300X38

* The trap and frame are made of high pressure die-cast alloy.

Die-cast Alloy
Trap & Frame
TF125/xxx
TF460/xxx
TF360/xxx



METAL 270 X 270 6MM RECESS

L X W X H (mm)	Model		Trk Entry W X H (mm)
	2 Compart.	3 Compart.	
270X270X56 270X270X69	UFJ270/225/2/25/M/6 UFJ270/225/2/38/M/6	UFJ270/225/3/25/M/6 UFJ270/225/3/38/M/6	225X25 225X38
270X270X56 270X270X69	UFJ270/250/2/25/M/6 UFJ270/250/2/38/M/6	UFJ270/250/3/25/M/6 UFJ270/250/3/38/M/6	250X25 250X38

* The metal trap and frame are made from 1.6mm pre-galvanized steel sheets reinforced with pre-galvanized steel sheets on the trap.

Metal
Trap & Frame
UFJ270/xxx



SPECIFICATIONS

Basic Box:

Pre-galvanized steel sheets to BS EN 10142,
BS EN 10327 or JIS G3302.

UNDERFLOOR JUNCTION BOXES



JUNCTION BOXES

Trap and Frame

- 6mm and 9mm recesses.
- plain type is also available.
- available in die-cast alloy and metal.

Junction Box


- allows for 'through', 'tee', 'elbow' and 'cross' configurations.
- supports CAT 6 compliance.

Pre-galvanized Steel Flyover

- a two-piece flyover to ease the pulling of cables.
- compartment segregation and protection from electromagnetic interferences via a steel flyover in compliance with IEE regulations.

Frame

- flanged edge to prevent carpet from fraying out.

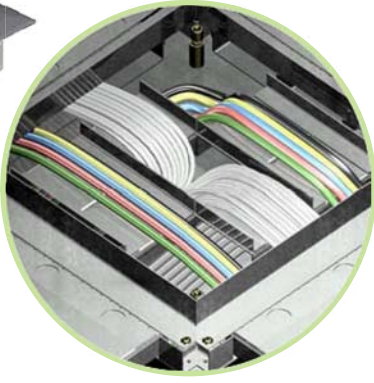

Levelling System

- to adapt to final floor level by a maximum upward lift of 12mm. (refer to Pg 12 for details)

Side Plates


- come with perforation to accept trunking and knockout holes pierced to accept 20mm conduits (25mm trunking height) or 25mm conduits (38mm trunking height).

Basic Box

- screed depths: (refer to Technical Data - Pg 12)
- rated IP30 in accordance with BS EN 60529.
- provided with disposable lid to prevent ingress during screeding.

Base Plate Fixing

- provision for fastening the box to ease installation.

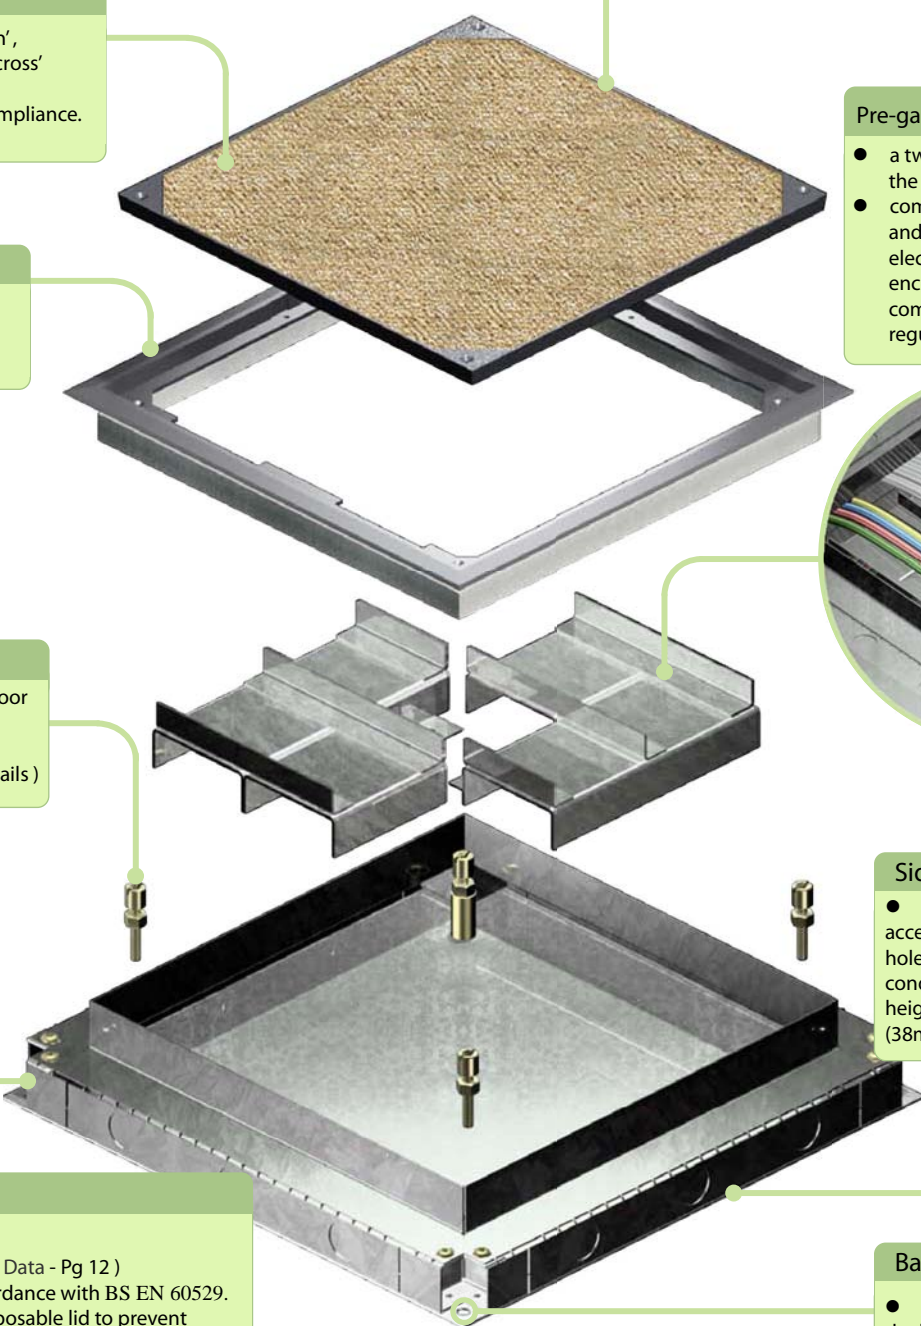



TECHNICAL SPECIFICATIONS

Underfloor Trunking

Material	Pre-galvanized steel sheets in accordance with BS EN 10142, BS EN 10327 or JIS G3302.
Strength	Tested under screeding to withstand 30 kN concentrated load.
International Standards	The trunking supplied shall comply with BS 4678 : Part 2, BS EN 50085-2-2 & IEC 61084-2-2.
Construction	Construction of the trunking is by channel method. This is to avoid damage to its galvanized coating to prevent corrosion. This method also adds strength to the section whilst allowing site adaptation. The top channel has continuous side returns to prevent the ingress of screed and is clamped to the base channels with two clamping saddles and a double width connecting saddle.
Standard thickness	1.6mm
Standard lengths	2.3 or 2.44 meters
No. of Compartments	2 and 3 compartments
Standard heights	25mm and 38mm


Junction Box / Service Outlet Box

Material	250x250mm or 300x300mm constructed from pre-galvanized steel sheets, suitable for screed depths from 56mm to 80mm with provision for trunking entry on four sides or 20mm conduits (for 25mm trunking height) or 25mm conduits (for 38mm trunking height) on blank sides. A throwaway lid shall be provided to prevent the ingress of screed during installation.
Strength	DAVIS underfloor boxes shall be able to withstand the following load tests:- <ol style="list-style-type: none"> Concentrated load test – 3.0kN @25mm sq. steel platen. Concentrated load test – 4.5kN @300mm sq. steel platen. Uniform distributed load test – 8.0kN/m². Maximum deflection shall not exceed 3mm for these loadings (BS EN 50085-2-2).
Construction	Covers (traps and frames) for the service outlet box and junction box shall be constructed from 3mm thick high-pressure die-cast alloy or 3mm thick pre-galvanized steel sheets with epoxy finish or plastic reinforced with 2.5mm (4.5kN) and 3mm (6.0kN) thick pre-galvanized infill steel sheets plate. All are available in 6mm recess for carpet finish or 9mm recess for tile finish.
Lid Opening	Service outlet cover shall be able to be flat open through 180°. It comes with cable grommets and cable retainers. Junction box cover is shut flat and secured by counter sunk screws.
Electromagnetic Compatibility	Junction Box shall be provided with pre-galvanized steel sheets flyover for compartment segregation. Due to electromagnetic interferences, the use of plastic flyover is not suitable. This is to comply with the latest I.E.E regulations. A service outlet box shall have fully segregated outlet panels to isolate the services in compliance with the latest I.E.E regulations.




TECHNICAL DATA


FOR 25MM TRUNKING HEIGHT

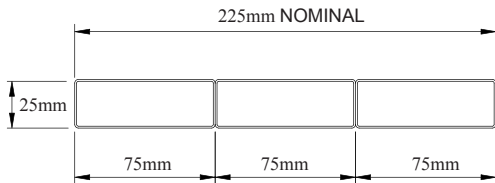

uPVC TRUNKING
(STANDARD 75mm X 25mm)

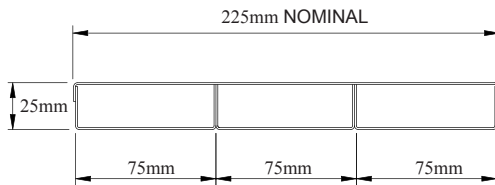


UNDERFLOOR TRUNKING
(STANDARD 25mm TRUNKING HEIGHT)

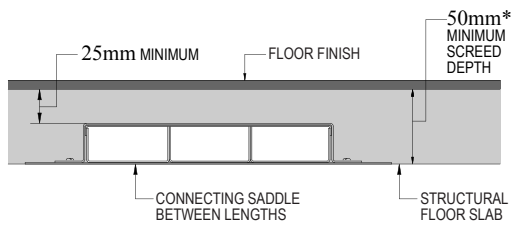

SCREEDING DEPTH


*50mm minimum screed depth is for trunking installation only.

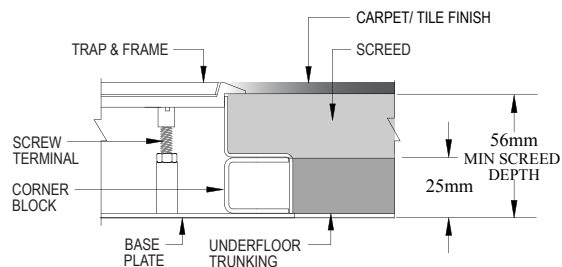


DAVIS underfloor boxes can be adjusted to suit screed depth of between 56mm and 68mm.

FLOOR BOX DEPTH


FOR 38MM TRUNKING HEIGHT

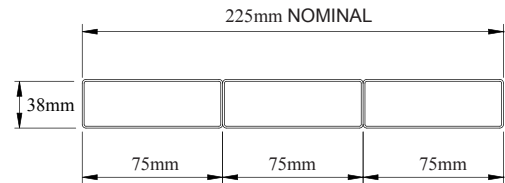

uPVC TRUNKING
(STANDARD 75mm X 38mm)

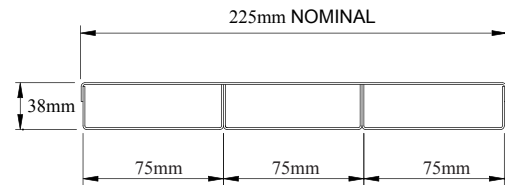


UNDERFLOOR TRUNKING
(STANDARD 38mm TRUNKING HEIGHT)

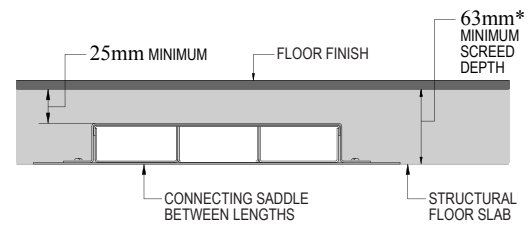

SCREEDING DEPTH

*63mm minimum screed depth is for trunking installation only.

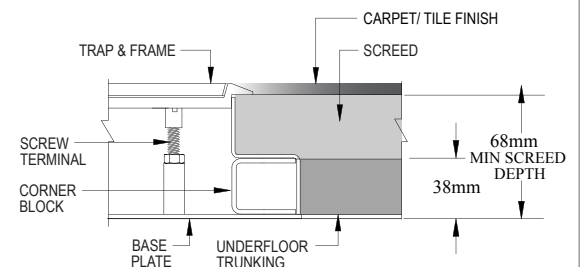

DAVIS underfloor boxes can be adjusted to suit screed depth of between 68mm and 80mm. Higher floor box depth is also available.

FLOOR BOX DEPTH



LAYOUT DESIGN

A COMB DESIGN


More suitable for low density service area. This pattern uses less trunking and offers an extremely cost-effective solution. This design is typically used for modular flushfloor, raised floor and underfloor systems.

A FISHBONE DESIGN

Widely used in areas where tenants require a good degree of flexibility in reorganizing work areas. This design is typically used for modular flushfloor, raised floor and underfloor systems.

A GRID DESIGN

Most widely used pattern where the tenants require a greater degree of flexibility in reorganizing work areas. This pattern allows the work place capacity to be increased and the capacity of rewiring through individual ring networks. This design is typically used for modular flushfloor and underfloor systems.

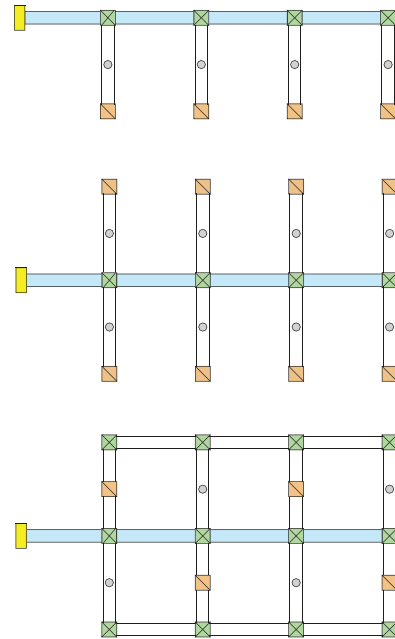

- Service Outlet Box
- Universal Junction Box
- Vertical Access Box
- Header Runs
- Pedestal Box



CABLE CAPACITY GUIDE

			uPVC Underfloor Trunking					Underfloor Metal Trunking												
			50x25x1C	75x25x1C	100x25x1C	75x38x1C	100x38x1C	100x25 x1C	100x38 x1C	225x25 x2C	225x25 x3C	225x38 x2C	225x38 x3C	250x25 x2C	250x25 x3C	300x25 x2C	300x25 x3C	300x38 x2C	300x38 x3C	
Capacity (mm ²) per compartment (45% fill)			405	630	783	975	1331	993	1564	1120	738	1764	1163	1247	823	1501	993	2365	1564	
	CSA (mm ² /mm)	Cable Factor	Capacity (no.) per compartment (45% fill)																	
Power Cables																				
PVC Stranded	1.5 mm ²	8.6	47	73	91	113	154	115	181	130	85	205	135	144	95	174	115	274	181	
	2.5 mm ²	12.6	32	50	62	77	105	78	124	88	58	139	92	98	65	119	78	187	124	
	4 mm ²	16.6	24	37	47	58	80	59	94	67	44	106	70	75	49	90	59	142	94	
	6 mm ²	21.2	19	29	36	46	62	46	73	52	34	83	54	58	38	70	46	111	73	
	10 mm ²	35.3	11	17	22	27	37	28	44	31	20	49	32	35	23	42	28	66	44	
	16 mm ²	47.8	8	13	16	20	27	20	32	23	15	36	24	26	17	31	20	49	32	
	25 mm ²	73.9	5	8	10	13	18	13	21	15	9	23	15	16	11	20	13	31	21	
Twin & Earth	2.5 mm ²	86	4	7	9	11	15	11	18	13	8	20	13	14	9	17	11	27	18	
	4 mm ²	99	4	6	7	9	13	10	15	11	7	17	11	12	8	15	10	23	15	
	6 mm ²	148	2	4	5	6	8	6	10	7	4	11	7	8	5	10	6	15	10	
Data Cables																				
CAT 5e UTP	5.5 dia	30.2	13	20	25	32	44	32	51	37	24	58	38	41	27	49	32	78	51	
CAT 5e STP	6 dia	36	11	17	21	27	36	27	43	31	20	48	32	34	22	41	27	65	43	
CAT 6 UTP	6.5 dia	42.2	9	14	18	23	31	23	37	26	17	41	27	29	19	35	23	56	37	
CAT 6 STP	7 dia	49	8	12	15	19	27	20	31	22	15	35	23	25	16	30	20	48	31	

The table above gives the available capacity units on 45% factor (IEE Wiring Regulation), applied to internal wiring area and serves as a guideline only.

G

INSTALLATION GUIDE

The structural floor slab shall be level and smooth. Humps and protruding cement must be hacked to level to ensure the trunking being laid will maintain the minimum screed thickness of 25mm over the trunking. It is also recommended that a mesh such as chicken wire mesh be placed over the trunking runs to prevent screed damage or cracking at a later stage.





Step 1: Use trunking layout drawing to select a fixed starting point for installation, for instance a junction box. Tie two guide lines approximately 150mm above the floor slab at 90° to each other. Position the junction box below the intersection of the guide lines.

Step 2: Position the floor boxes and trunkings to reflect the layout drawing. The junction box's position can be used as a reference point. Bend 90° up the perforated section of the box's side plate. Insert the trunking approximately 40mm into the box.













Step 3: Use connecting and clamping saddles to secure all screw connections and to fasten the trunkings to the slab. Use base plate holes provided to fasten floor box to the slab.

Step 4: The box should be properly covered with a disposable lid and taped to prevent the ingress of cement during screeding. The disposable lid top can be set as a screed depth datum. The system is now ready for screeding to take place.

Step 5: Once the screed is completely dried, the disposable lid can be removed, and the box interiors can be fitted. Use the levelling system to adjust the box height to reach the level of the required screed depth (box is factory set to 56mm or 68mm). Once the wiring is completed, the trap and frame can then be installed. Should extra wiring space/ plug top clearance be required, use levelling system to top up the space.

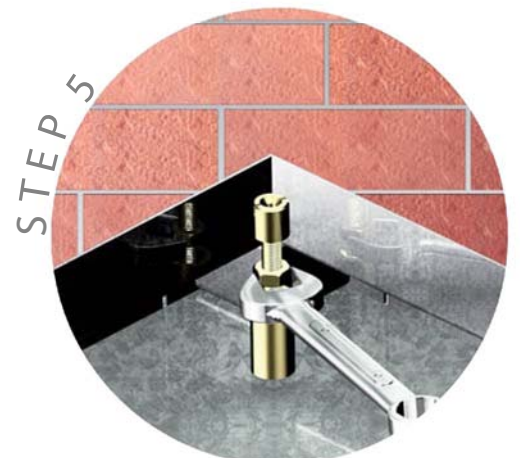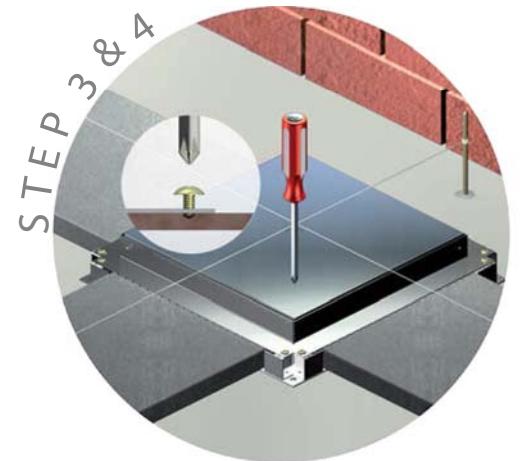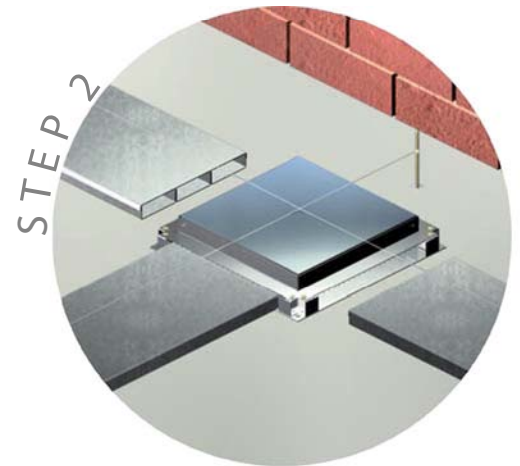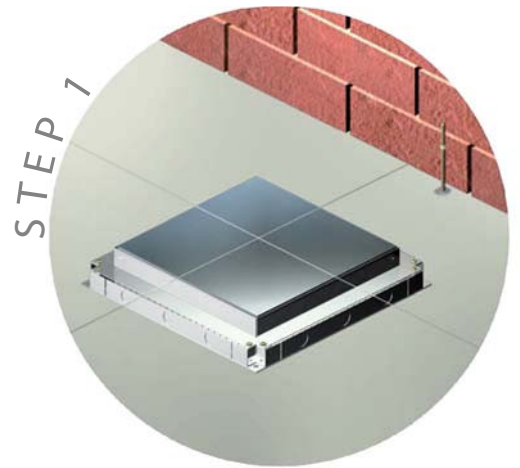

OUTLET PANELS

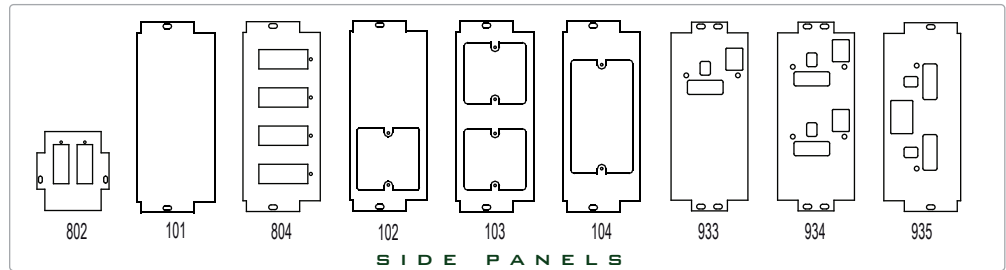

Description	125 x 125		125 x 250		250 x 250		QUANTEC		
	1-Comp.	1-Comp.	2-Comp.	2-Comp.	3-Comp.		2-Comp.	3-Comp.	4-Comp.
					CENTRE	SIDES			
Blank plate				OP125 101	OP70 C01	OP90 101	ST145 C01	ST97 C01	SF72 C01
2 nos. Cut-out Keystone 57x22.5mm	OP125 802S		OP125 802D						
4 nos. Cut-out Keystone 57x22.5mm		OP100 804D		OP125 804	OP70 C804	OP90 804	ST145 804	ST97 804	SF72 804
Cut-out in accordance to BS4662 1G	OP125 102S	OP100 102D	OP125 102D	OP125 102		OP90 102	ST145 102	ST97 102	
Cut-out in accordance to BS4662 2x1G		OP100 103D		OP125 103		OP90 103	ST145 103	ST97 103	
Cut-out in accordance to BS4662 2G		OP100 104D		OP125 104		OP90 104	ST145 104	ST97 104	
1G 13A DAVIS Underfloor Socket Outlet	OP125 933S	OP100 933D	OP125 933D	OP125 933		OP90 933	ST145 933	ST97 933	
2x1G 13A DAVIS Underfloor Socket Outlet		OP100 934D		OP125 934		OP90 934	ST145 934	ST97 934	
2G 13A DAVIS Underfloor Socket Outlet		OP100 935D		OP125 935		OP90 935	ST145 935	ST97 935	

Description	300 x 300			270 x 230		
	2-Comp.	3-Comp.		2-Comp.	3-Comp.	
		CENTRE	SIDES		CENTRE	SIDES
Blank plate	OP150 101	OP100 C01	OP100 101	OP135 2 101	OP90 2 101	OP90 2 101
4 nos. Cut-out Keystone 57x22.5mm	OP150 804	OP100 C804	OP100 804	OP135 2 804	OP90 2 804	OP90 2 804
Cut-out in accordance to BS4662 1G	OP150 102	OP100 C102	OP100 102	OP135 2 102	OP90 2 102	OP90 2 102
Cut-out in accordance to BS4662 2x1G	OP150 103	OP100 C103	OP100 103	OP135 2 103	OP90 2 103	OP90 2 103
Cut-out in accordance to BS4662 2G	OP150 104	OP100 C104	OP100 104	OP135 2 104	OP90 2 104	OP90 2 104
1G 13A DAVIS Underfloor Socket Outlet	OP150 933	OP100 C933	OP100 933	OP135 2 933	OP90 2 933	OP90 2 933
2x1G 13A DAVIS Underfloor Socket Outlet	OP150 934	OP100 C934	OP100 934	OP135 2 934	OP90 2 934	OP90 2 934
2G 13A DAVIS Underfloor Socket Outlet	OP150 935	OP100 C935	OP100 935	OP135 2 935	OP90 2 935	OP90 2 935

Note : All outlet panels supplied are epoxy coated. Non-standard outlet panels are also available upon request.


13A UNDERFLOOR SOCKET OUTLETS - SIDE WIRE ENTRY

DAVIS one and two gang 13A Underfloor Socket Outlets are specially designed to be slim (25mm) with side wire entries to suit underfloor service boxes.


Rating / Standard : 240V, 13A a.c / BS 1363 : Part 2

3 terminals to : 4x2.5mm² cables each or 3x4.0mm² cables each accommodate

Approved by : JKR & Suruhanjaya Tenaga

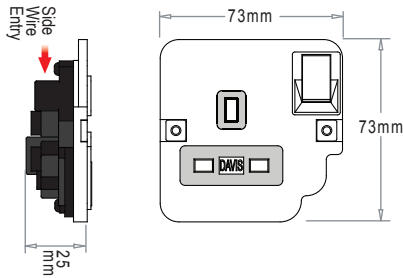

Model	Description
D13/1GS/S1	1 Gang 13A Underfloor Socket Outlet

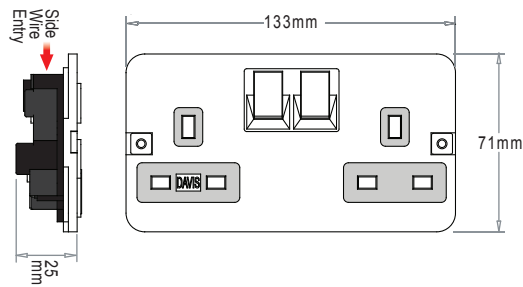

Model	Description
D13/2GS/S1	2 Gang 13A Underfloor Socket Outlet

UNDERFLOOR BOX EXTENSION SCREW TERMINALS



Model	Description*
EXT 70 + EXT 65	120 - 160mm
EXT 90	96 - 118mm
EXT 65	71 - 93mm
EXT 40	STANDARD (50 - 68mm)

* screed depth for 25mm trunking entry


DATA & TELEPHONE OUTLETS

DAVIS keystone module comes with Angled Holder, RJ11 or CAT6 keystone jack and accessories designed to suit underfloor service boxes.

Comply with : ANSI/TIA-568.2-D | ISO/IEC 11801 specifications

Come with : IDC connector


Hole cut-out : 57mm x 22.5mm (1.0-1.3mm panel thickness)

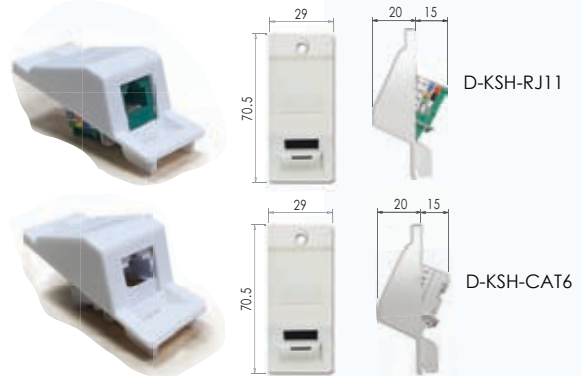

Model	Description
D-KSH-RJ11	RJ11 Telephone keystone jack with keystone holder
D-KSH-CAT6	RJ45 CAT 6 keystone jack with keystone holder
D-KSH	Keystone holder


SERVICE ACCESS GROMMETS

DAVIS Service Access Grommet provides a convenient and low-cost solution to data, power and voice services for raised access floors. Recommended cut-out hole is $\phi 127$ mm.

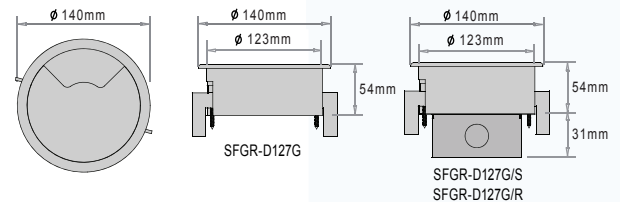

Model	Description
SFGR-D127G	5" Service Access Grommet w/o Box
SFGR-D127G/S	5" Service Access Grommet c/w 1 Gang 13A Switched Socket Outlet
SFGR-D127G/R	5" Service Access Grommet c/w 2 nos. RJ45 / RJ11 Knock out Hole

FLOOR PEDESTAL BOXES

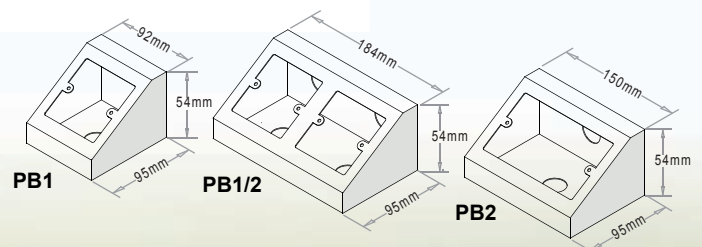

DAVIS Pedestal Boxes are available in 3 designs : 1 gang, 2 x 1 gang and 2 gang for mounting onto Underfloor or Flushfloor Trunkings. They are constructed from pre-galvanized steel sheets with epoxy finish. The socket outlet fixing are in accordance with BS 4662.

DAVIS MALAYSIA SDN. BHD. (199501007533) (336731-A)

Lot 526, Jalan Rantau Panjang, Batu 11, 42500 Teluk Panglima Garang, Kuala Langat, Selangor Darul Ehsan, Malaysia.

Tel: +60 3 3122 2488 WhatsApp: +60 19 725 2488 Fax: +60 3 3122 2482 Enquiries: enquiries@davis.com.my Website: www.davis.com.my

The information contained in this brochure has been carefully compiled and is for guidance only. We do not accept any responsibility for loss caused by any error contained herein. We reserve the right to alter designs and specifications without prior notice, in line with our policy of continuous product improvement.

Printed in Malaysia