




FEATURES

- Helical circular mixture, fast and equal stirring
- Barrel body and screw atr made of stainless steel and polished for easy cleaning
- Auto timer can bring dry within 1~60 minutes
- Suitable for all kind of plastic raw material and color
- Installed with power control device to ensure safety
- Heater drying is optional

STRUCTURE DIAGRAM

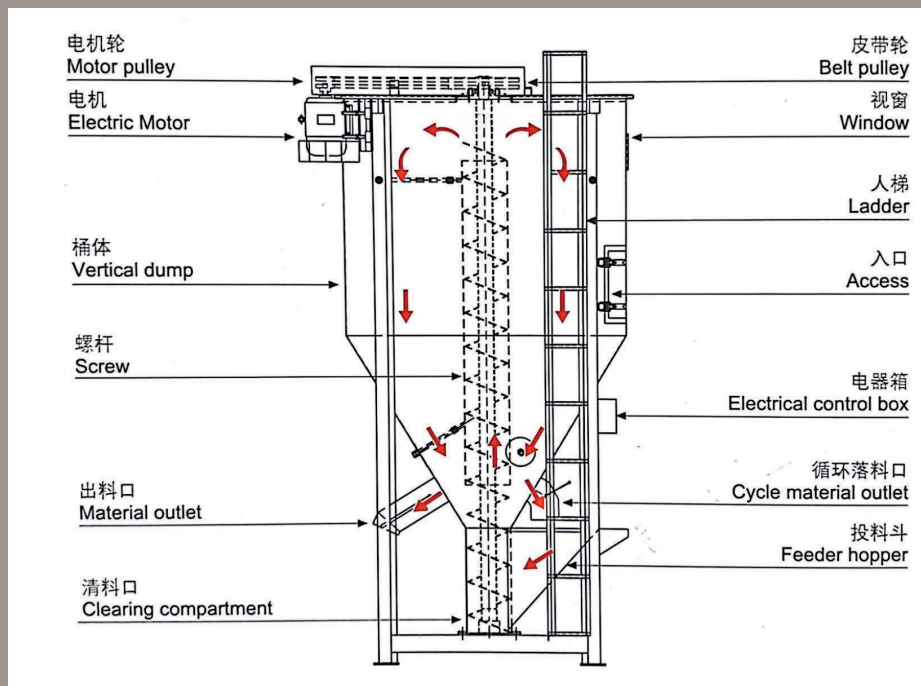

SPECIFICATIONS & PARAMETERS



MODEL	YMVSM-500D	YMVSM-1000D	YMVSM-2000D
MOTOR POWER (HP)	3	4	5
MAXIMUM CAPACITY (KG)	500	1000	2000
ROTATING SPEED (r/min)	330	330	330
HEATER POWER (kW)	9.0	15.3	30.6
BLOWER POWER (kW)	0.75	1.1	1.1
DIMENSION (L x W x H)	1200mm x 1200mm x 2400mm	1550mm x 1550mm x 2700mm	1850mm x 1850mm x 3600mm
WEIGHT (KG)	440	710	1200

We reserve right to change specifications without prior notice 产品规格若有变更，恕不另行通知

THE WORKING PRINCIPLE OF VERTICAL SILO MIXER



The central screw works on the auger principle are adopted to mix the material by conveying the material to the top of the barrel body and allowing it to drop by scattering it. This process is continuously repeated until the material is mixed even