

KONICA MINOLTA

POWER THROUGH EFFORTLESSLY WITH THE NEW BLACK

A3 Monochrome bizhub 758 Series



bizhub 758/958

Giving Shape to Ideas



DESIGNED FOR HIGH SPEED OUTPUT

The new flagship bizhub 758/958 MFPs deliver high-speed B&W output. It supports a wide variety of applications and tailored to meet the needs for mobility, cloud and connectivity.

Equipped with a 9-inch electrostatic multi-touch panel with customisable user interface, users can configure and install widgets for internal communication. The screen display enlarge function allows better visibility to help users with low vision.

Its intuitive INFO-Palette design allows for seamless user experience across PCs, tablets and smart phones.



> Improved Productivity

All new large-capacity and high-speed ADF

Newly developed large-capacity and high-speed dual scan ADF can scan 240 sheets/min in duplex mode. The maximum stacking capacity of the ADF has been increased to 300 sheets and scan of that capacity can now be completed just in two and a half minutes.

Faster printing speed

This series achieved significantly fast copy/print speed of 75 ppm*. This answers to CRDs and high-volume offices' requirement of a speed large-volume output. Shortening output time enables effective use of time and manpower, resulting efficiency and cost reduction.

* Printing speed for bizhub 758:75ppm 958: 95ppm

Multi-feeding Detection

Due to the high demand for operational productivity, the bizhub 758 series incorporates a multi-feeding detector and an enhanced paper feeding path to reduce feeding errors and notifies users if errors occur. This greatly reduces downtime and improves user experience.

* Optional Multi-feed detection Kit UK-501 is required.

> Input and Finishing Options

High-Speed ADF
Max. 300 sheets originals

120_{opm} for simplex scanning

240_{opm} for duplex scanning

Multiple Bypass Tray
Max. SRA3 / 150 sheets

Post Inserter - PI-507

Z-fold Unit - ZU-609

Punch Kit - PK-523

Finisher - FS-537SD

Saddle Stitcher

Max. sheets 6,650

Max. SRA3
500 sheets


Max. A4
1,500 sheets

Max. A4
1,000 sheets


LU-303
Max. A4/3,000 sheets

> Multifunction finisher

The optional finisher allows users to perform many high-level finishing such as three sheets stacked tri-fold, stapling, punching, saddle stitching, Z folding and post inserter. Users can produce documents and presentation materials in-house easily and professionally.

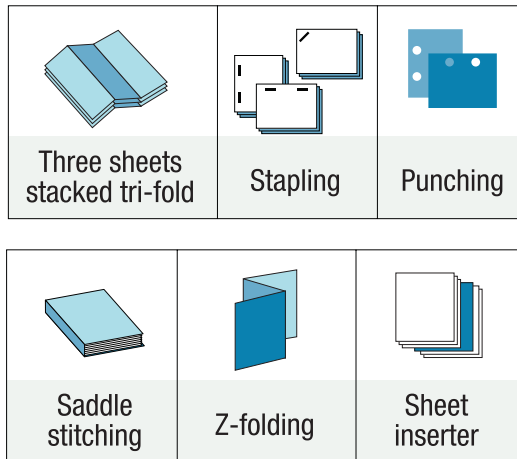

> Document Digitisation

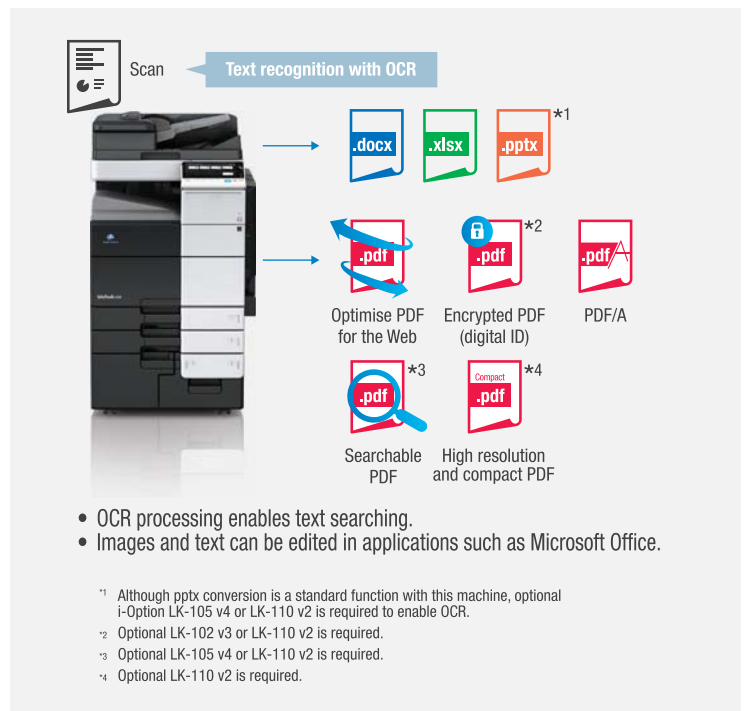

> Connectivity Made Easy

Connect with Android devices

The new Mobile Touch Area on the operation panel is able to support NFC (Near Field Communication) connection with Android^{*1} devices. Touch the area with Android devices to perform pairing through the PageScope Mobile (PSM).

^{*1} NFC connection requires Android OS 4.4 or higher to be installed.

^{*2} Wireless LAN environment is required to perform touch to print and scan.

Connect with iOS devices

For the iOS device, to search and register MFP nearby into the PageScope Mobile (PSM)^{*1} via Bluetooth LE (BLE)^{*2} technology. Additionally, iOS devices can be used to login to the MFP through BLE connection.

^{*1} Pagescope mobile for iOS version 5.0 or higher is required

^{*2} Optional local interface kit EK-611 is required.



CONNECT INSTANTLY WITHOUT PRINT DRIVERS TO INDUSTRY STANDARD MOBILE TECHNOLOGIES



AirPrint

Apple's standard printing system compatible with iOS 4.2 and Mac OS 10.7 or later. A compatible printer on your wireless LAN can be used.



Mopria Print Service

Wireless printing technology established by Mopria Alliance. It allows you to print from devices installed with Android 4.4 or later.



Google Cloud print

A cloud print service provided by Google. You can print from any location via the internet regardless of OS or device type.



Konica Minolta Print Services

Print directly to bizhub via a wireless LAN from all apps that supports Android's print function.



PageScope Mobile

Konica Minolta's proprietary mobile print application allows usage of wide range of bizhub functions such as duplex print, security print, staple and hole punch.



Wireless LAN (AP mode) support

The MFP becomes a wireless LAN Access Point to allow direct wireless connection between mobile devices and bizhub. Devices brought into the office will be able to directly connect with bizhub and are securely separated from existing company LANs. PageScope Mobile will enable more convenient use, as wireless set up can be completed between a mobile device and bizhub simply by reading the QR code that is displayed on the machine panel or through NFC connectivity.

* Optional upgrade kit UK-212 is required.

> Document and Data Security

Authentication on the MFP main unit

Authentication can also be performed directly on the main unit. Access control can be set up for each function including copy, print, scan and fax*¹.

*¹ Optional Fax Kit FK-516 is required.



IC Card Authentication

Users can authenticate with various types of IC card*². The authentication method complies with SSFC (Shared Security Formats Cooperation). Besides the IC Card, users can authenticate with Android devices*³ with equipped NFC tag.

*² Optional Authentication Unit AU-201S is required. Compliant non-contact IC cards include FeliCa (IDM), SSFC, FCF, FCF (campus), and MIFARE (UID).

*³ Requires Android 4.4, or later that supports HCE (Host Card Emulation) or PageScope Mobile for Android v5.0 or later.



Biometric Authentication

Scans the vein on the finger as the biometric data, which cannot be forged and is easy to implement*⁴.

*⁴ Optional Biometric Authentication Unit AU-102, Working Table WT-506 or WT-513 are required.

HDD Mirroring

Supports "Mirroring" which synchronises the main HDD data and backup HDD data in real time. In the event of main HDD failure, operation automatically switches to the backup HDD which will drastically reduce the risk of data loss.

* Optional HDD Mirroring Kit HD-524 is required.

Trusted Platform Module (TPM)


Manage confidential information with a TPM security chip which encrypts and decrypts any confidential data. The confidential information will be encrypted and stored only in the dedicated storage area in the chip.

* Optional i-Option LK-115 v2 is required.

Server-less Pull Printing

With server-less pull printing, print jobs sent by users can be printed from any MFP in the same network.

* Optional i-Option LK-114 are required to be installed to each of the MFP.

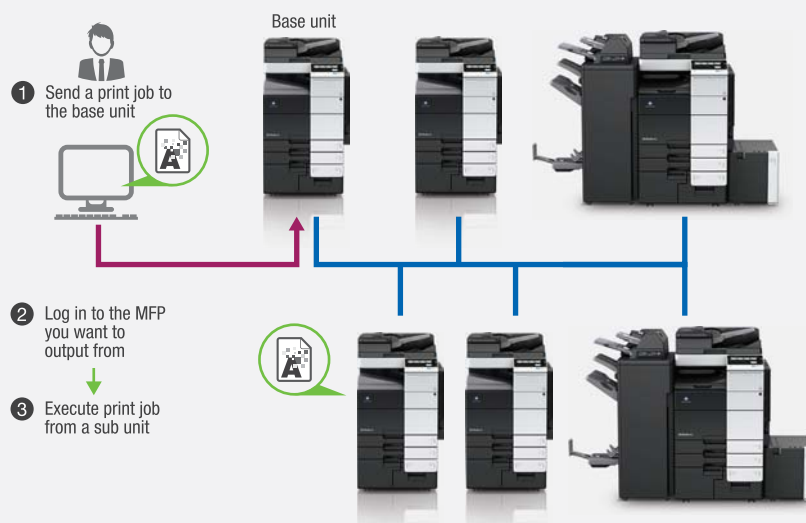


OUTSTANDING ENVIRONMENTAL PERFORMANCE

➤ Advanced technology that has a minimal impact on the environment

Usage of the recycled materials


Konica Minolta has made further advances on its unique chemical processing technology. The ratio of recycled materials in the surface area of the machine has increased to approximately 74%.

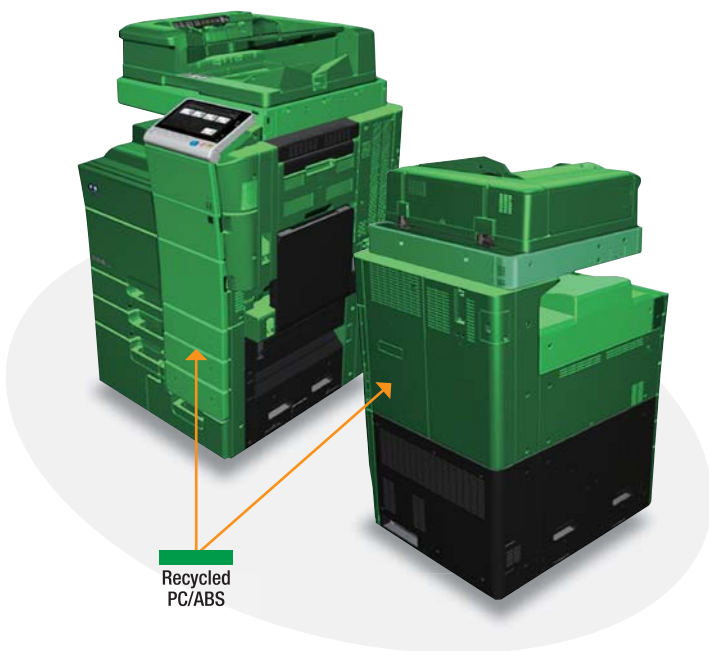

Best-in-class low power consumption design

Environment-friendly technologies are used throughout the systems, and is the best-in-class low power consumption. bizhub 758 series achieved the standard value of Ver.2.0 ENERGY STAR Program and only consume 0.5W of power during sleep mode, that results in major CO₂ emission reductions.

Reduction rates against standard values defined in the International Energy Star Program

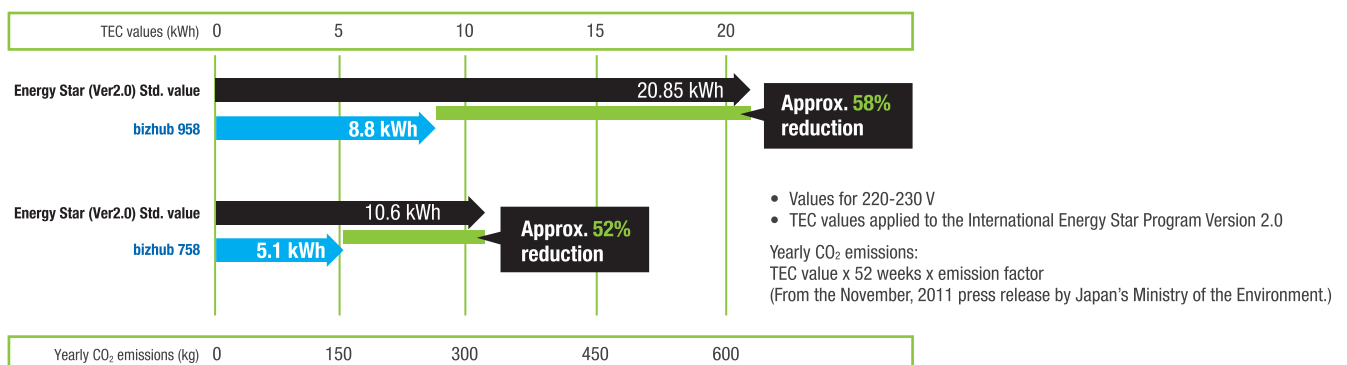

bizhub 758/958



BLACK & WHITE:

75 / 95 ppm

MAX PAPER CAPACITY: **6,650** sheets

SCANNING SPEED:

240 / 120 opm

PRINT RESOLUTION:

1,200 x 1,200 dpi

Key Features:

High-speed 75/95 ppm B&W print / copy output makes users more productive

Dual scanning at up to 240 opm brings information to users' workflow faster

Built-in Emperon print system with PCL6 / PS3 emulation, native XPS

Large 9" colour display on the bizhub 758 printer, copier and scanner makes it as simple to operate as a familiar tablet

Transparent menus, customisable icons, intuitive soft keyboards

Multi-touch functions: swipe, drag, double-tap, rotate, flick & pinch

Customisable applications and bizhub connectors



Simitri
with Biomass

*1 Optional

Job Separator JS-602*1

When attached to the FS-537/FS-537SD, this becomes the fax/print/copy output separator tray.

*1 PI-507 and JS-602 cannot be installed at the same time.

Post Inserter PI-507*1

When attached to Finisher FS-537/FS-537SD, allows you to add white paper cover sheet/inter sheet, and operate the Finisher manually.

Punch Kit PK-523

Attach to Finisher FS-537/FS-537SD for hole punching capability. (paper up to 300 g/m² thick)

Z Folding Unit ZU-609

Includes Z-folding function.

Relay Unit RU-515

Finisher FS-537

A high-performance finisher that allows you to multi-staple up to 100 sheets.

Finisher FS-537SD

A high-performance finisher that allows you to multi-staple, saddle stitching, half folding and tri-folding.

Staple Kit MS-10A

* for FS-537/FS-537SD

Staple Kit SK-602

* for FS-536/FS-536SD/FS-537SD

Output Tray OT-508

Relay Unit RU-515

Punch Kit PK-520

Attach to Finishers FS-536/FS-536SD for hole punching capability (paper up to 300 g/m² thick)

Finisher FS-536

A small, low-noise and high-performance finisher that allows you to multi-staple up to 50 sheets.

Finisher FS-536SD

A small, low-noise and high-performance finisher that allows you to multi-staple, saddle stitching, half folding and tri-folding.

Upgrade kit UK-212

Wireless LAN kit

Keypad KP-101

Keyboard Holder KH-102

Security Kit SC-508

* Two SC-508 are required.

Local Interface Kit EK-610

USB hub kit / Voice guidance

Local Interface Kit EK-611

USB hub kit / Voice guidance / Bluetooth LE

Fax Kit FK-516

For 1st / 2nd line

Stamp Unit SP-501

Hard Disk HD-524

For Mirroring

Double Feed Detection Kit UK-501

For ADF

Working Table WT-513

For Upright Panel

Working Table WT-506

Authentication Unit AU-102

Biometric type

* WT-506 or WT-513 is required.

Authentication Unit AU-201S

IC card type

* WT-506 or MK-735 is required. However, AU-102 cannot be combined when equipped with WT-506.

Mount Kit MK-735

For IC card authentication installation
Built into front panel

Banner Paper Setting Guide MK-715

Used for banner printing.

Large Capacity Unit LU-205

Increases the bizhub's paper capacity by 2,500 sheets for paper up to SRA3 and 80 g/m² thick.

Large Capacity Unit LU-303


Increases the bizhub's paper capacity by 3,000 sheets for paper up to A4 size and 80 g/m² thick.

Note: Some options are not listed.


OR
One of the options may be selected (not mandatory).

✓
One of the options must be selected (mandatory).


SPACE REQUIREMENTS - bizhub 758 / 958

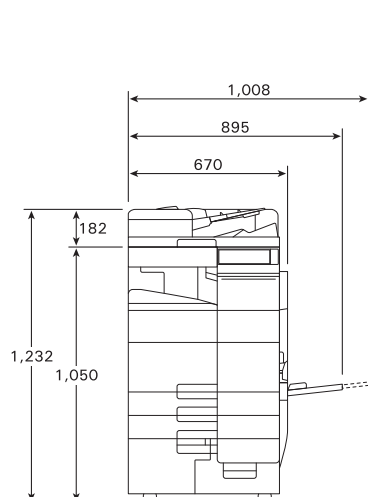


Front View
bizhub 758/958 + OT-508

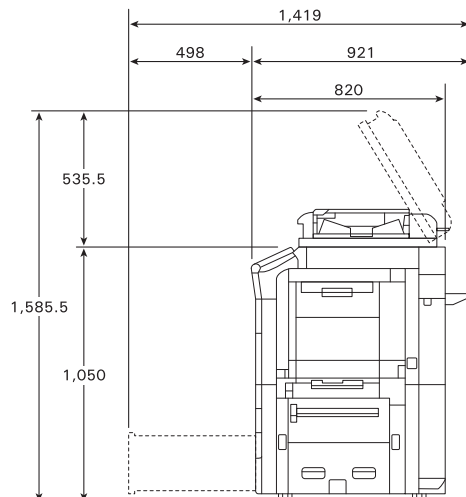

Side View
bizhub 758/958 + OT-508

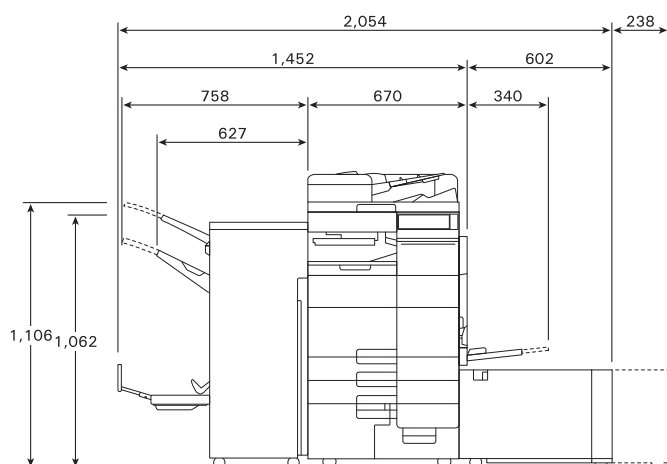

Front View
bizhub 758/958 + RU-515 + FS-537SD + LU-205

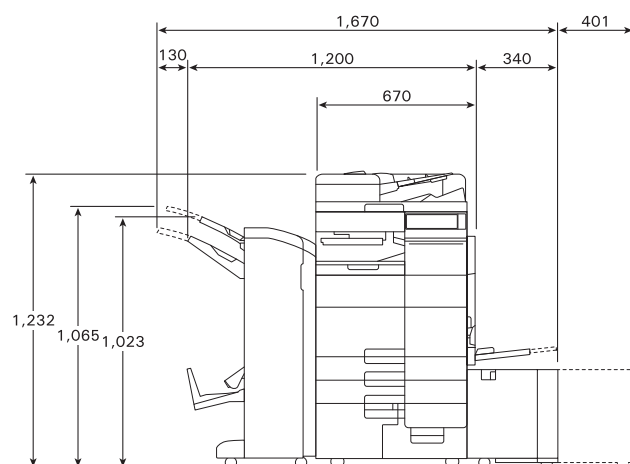

Front View
bizhub 758/958 + RU-515 + FS-536SD + LU-303

i-Option - bizhub 758 / 958

Model	Function	Note
i-Option LK-102 v3	Encrypted PDF or PDF/A (1a/1b)	
i-Option LK-104 v3	Voice guidance*1	
i-Option LK-105 v4	Searchable PDF	
i-Option LK-106	Barcode font (Code39, QR Code, PDF417)	
i-Option LK-107	Unicode font	
i-Option LK-108	OCR font (OCR-A, OCR-B (PCL))	
i-Option LK-110 v2	File format extension package	
i-Option LK-111	ThinPrint function	
i-Option LK-114	Server-less Pull Printing function	
i-Option LK-115 v2	TPM function	Not available in China.

*1 Local Interface Kit EK-610 or EK-611 is required.

SPECIFICATIONS - bizhub 758 / 958

bizhub 758/958 General Specifications

		bizhub 958	bizhub 758
Type		Console	
Copy	Scan	Main: 600dpi x Sub: 600dpi	
Resolution	Print	1,200 dpi x 1,200 dpi	
Gradation		256	
Memory size		4 GB	
HDD		250 GB	
Original Type		Sheets, Books, Objects	
Max. Original Size		A3 (11" x 17")	
Output Size		Main unit: SRA3*1, A3 to A5, 12-1/4" x 18" (A3 wide (311.1 mm x 457.2 mm)), 12" x 18" (A3 wide (304.8 mm x 457.2 mm)), 11" x 17" to 8-1/2" x 11", 5-1/2" x 8-1/2", 8" x 13"*2, 16K*3, 8K, Postcard Bypass Tray: SRA3, A3 to A5, B6*4, A6*4, 12" x 18" (A3 wide (304.8 mm x 457.2 mm)), 11" x 17" to 5-1/2" x 8-1/2", 8" x 13" *5, 16K, 8K, Postcard (A6 (4" x 6" Card)), Envelope*5, Index paper, Banner paper (Width: 210 mm to 297 mm (8-1/4" to 11-11/16"), Length: 457 mm to 1,200 mm (18" to 47-1/4"))*7	
Image Loss		Max. 4.2mm or less for top edge (5 mm for thin paper), Max. 3.0mm or less for bottom edge, Max. 3.0mm or less for right/left edges *A loss of 4.2 mm each during printing.	
Warm-Up Time*8 (23 C, std. voltage)		55 sec. or less	22 sec. or less
* The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.			
* The time required to start printing when the main power switch is ON and the sub-power switch is turned from OFF to ON.		55 sec. or less	22 sec. or less
First Copy Out Time*9		3.2 sec. or less	3.6 sec. or less
Copy Speed (A4)		95 ppm	75 ppm
Copy Magnification	Fixed Same Magnification	1: 1.05% or less	
	Scaling Up	1: 1.154/1.224/1.414/2.000	
	Scaling Down	1: 0.866/0.816/0.707/0.500	
	Preset	3 types	
	Zoom	25 to 400% (in 0.1% increments)	
	Lengthwise Crosswise Individual Settings	25 to 400% (in 0.1% increments)	
Paper Capacity	Tray 1 / Tray 2	500 sheets (up to SRA3)	
	Tray 3	1,500 sheets (up to A4)	
	Tray 4	1,000 sheets (up to A4)	
	Bypass Tray	150 sheets (up to SRA3)	
Max. Paper Capacity (80 g/m ²)*10		6,650 sheets	
Paper Weight	Main Unit	52 to 256 g/m ²	
	Multiple BypassTray	52 to 300 g/m ²	
Multiple Copy		1 to 9,999 sheets	
Auto Duplex	Paper Size	SRA3, A3 to A5, B6*4, A6*4, 12-1/4" x 18" (A3 wide (311.1 mm x 457.2 mm)), 12" x 18" (A3 wide (304.8 mm x 457.2 mm)), 11" x 17" to 5-1/2" x 8-1/2"*4, 7-1/4" x 10-1/2", 8" x 13", 16K, 8K, Postcard (A6 (4" x 6" Card))	
	Paper Weight	52 to 256 g/m ²	
Power Requirements		AC220 to 240 V 15 A (50/60 Hz)	AC220 to 240 V 10 A (50/60 Hz)
Max. Power Consumption		3.6 kW or less	2.1 kW or less
Dimensions [W] x [D] x [H]		670 x 820 x 1,232 mm (26-3/8" x 32-5/16" x 48-1/2")	
		*Main unit + ADF	
Weight		Approx. 200 kg (440-15/16 lb)	
Space Requirements [W] x [D]*11		1,008 x 1,419 mm (39-11/16" x 55-7/8")	

*1 SRA3 paper can be used in Tray2.

*2 There are four types of foolscap: 9-1/2" x 13-1/2" , 8-1/2" x 13" , 8-1/4" x 13" , and 8" x 13" . Any one of these sizes is selectable. For details, contact your service representative.

*3 Long edge feed 

*4 Short edge feed 

*5 There are six types of foolscap: 9-1/2" x 13-1/2" , 220 mm x 330 mm , 9-1/2" x 13" , 8-1/4" x 13" , 8-1/8" x 13-1/4" , and 8" x 13" . Any one of these sizes is selectable. For details, contact your service representative.

*6 Wrinkles or printing errors may occur due to the type, storage or environment that exists when envelope printing is carried out.

*7 Printing on banner paper can only be performed from a PC.

*8 May vary depending on the operating environment and usage.

*9 A4 long edge feed full size/using the first tray/scanning from the original glass surface.

*10 With options installed.

*11 Dimensions when the Paper Trays are pulled out and the Tray Extension of the Bypass Tray is opened.

Printer Specifications

Type	Embedded	
CPU	MB86S72 (1.6GHz)	
Memory	4 GB	
Print Speed	Same as Copy Speed (when using the same original)	
HDD	250GB	
Print Resolution	1,800 dpi (equivalent) x 600 dpi (at smoothing) or 1,200 dpi x 1,200 dpi (in 1,200 dpi mode)*1	
PDL	PCL5e/c Emulation, PCL6 (XL ver. 3.0) Emulation, PostScript 3 Emulation (3016), XPS (Ver. 1.0)	
Protocol	TCP/IP (LPD, Raw, SMB, IPP), AppleTalk, IPX/SPX	
Support OS	PCL	Windows Vista*2 / 7*2 / 8.1*2 / 10*2 Windows 2008*2 / 2008 R2 / Server 2012 / Server 2012 R2
	PS	Windows Vista*2 / 7*2 / 8.1*2 / 10*2 Windows 2008*2 / 2008 R2 / Server 2012 / Server 2012 R2 Mac OS X 10.7 / X 10.8 / X 10.9 / X 10.10 / X 10.11(Intel) Linux
	XPS	Windows Vista*2 / 7*2 / 8.1*2 / 10*2 Windows 2008*2 / 2008 R2 / Server 2012 / Server 2012 R2
Fonts	PCL	European 80 fonts
	PS	European 137 fonts
Interface	Ethernet (1000BaseT / 100BaseTX / 10BaseT), USB 2.0 / 1.1	

*1 Output speed will be reduced.

*2 Supports the 32bit (x86) or 64bit (x64) environment.

Scanning Function Specifications

Type	Full-Colour Scanner	
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)	
Driver	TWAIN Driver, HDD TWAIN Driver	
Protocol	TCP/IP (FTP, SMB, SMTP, WebDAV) (IPv4/IPv6)	
Scanning Speed *1	Simplex	120 opm
(Colour/B&W)	Duplex	240 opm
Scanning Size	Max. A3 (11" x 17")	
Output Format	TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, OOXML (pptx,xlsx*,docx*), Searchable PDF*, PDF/A*2, Linearised PDF*2	
Scanning Resolution	Push	200 dpi / 300 dpi / 400 dpi / 600 dpi
	Pull	100 dpi / 200 dpi / 300 dpi / 400 dpi / 600 dpi
Main Functions	Scan to e-mail, Scan to FTP, Scan to BOX (HDD), Scan to PC (SMB), Network TWAIN, Scan to WebDAV, Scan to Me, Scan to Home, Scan to USB, Scan to Scan Server, Scan to Web Service (WSD-Scan), Device Profile for Web Services (DPWS)	
Other Functions	Multi-Method Send, Authentication at the time of e-mail send (SMTP authentication, POP before SMTP), S/MIME, Annotation	
Supported operating systems*3	Windows Vista / 7 / 8.1 / 10	

*1 Speed when scanning A4 original in 300 dpi or less by using the ADF.

*2 Optional

*3 Supports the 32bit (x86) or 64bit (x64) environment.



Dual Scan Document Feeder

Type	Dual Scan Document Feeder	
Supported Paper Size	Max. A3 (Fax mode: Max. 1,000 mm)	
Mixed Size	Support	
Original Set	Centre guide	
Support Paper Weight	Thin paper: 35 to 49 g/m ² (Simplex) Plain paper: 50 to 210 g/m ² (Simplex/Duplex), 50 to 128 g/m ² (Mixed Original)	
Paper Capacity	Max. 300 sheets (80 g/m ²)	
Productivity*1	Simplex	Colour/B&W: 120 opm
	Duplex	Colour/B&W: 240 opm
Power Requirements	Supplied from the MFP main body	
Dimensions [W] x [D] x [H]	618 x 575 x 180 mm (24-5/16" x 22-5/8" x 7-1/16")	
Weight	Approx. 15.1 kg (33-5/16 lb)	

*1 When copying A4, resolution 600 dpi.

Internet Fax

Protocol	SMTP, POP
Connection Mode	Full-Mode
Sending Paper Size	A3, B4, A4
Recording Paper Size	Max. A3
Resolution	200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)
Colour	Support Colour Internet Fax
Format	Send: TIFF-F, Receive: TIFF-F Colour/Grey Scale: TIFF (RFC3949 Profile-C)

Fax Kit FK-516 (Optional)

Communication	Super G3
Compatible Lines	Public Switch Telephone Network, Private Branch Exchange, Fax Communication Line
Line Density	G3 (8 dot/mm x 3.85 line/mm, 600 x 600 dpi)
Modem Speed	2.4 to 33.6 kbps
Compression	MH/MR/MMR/JBIG
Sending Paper Size	Max. A3 (Long Length Support: Max.1,000 mm)
Recording Paper Size	Max. A3 (Long Length Max. 1,000 mm – following the page division –)
Transmission Speed	Less than 3 sec. (A4, V.34, 33.6 kbps, JBIG)
Memory	Shared with the copier
Number of Abbr. Dials	2,000
Number of Program Dials	400
Number of Group Dials	100
Sequential Multiple Station Transmission	Max. 600



Large Capacity Unit LU-303 (Optional)

Support Paper Type (Weight)*	Thin paper (52 to 59 g/m ²), Plain paper (60 to 90 g/m ²), Thick paper (91 to 256 g/m ²)
Support Paper Size	A4*1, 8-1/2" x 11" *1
Paper Capacity	Plain paper: 3,000 sheets (80 g/m ²)/3,300 sheets (60 g/m ²) Thick paper 1: 2,500 sheets, Thick paper 1+: 1,750 sheets, Thick paper 2: 1,550 sheets, Thick paper 3: 1,300 sheets
Power Requirements	Supplied from the MFP main body
Max. Power Consumption	40 W or less
Dimensions [W] x [D] x [H]	367 x 528 x 405 mm (14-7/16" x 20-13/16" x 15-15/16")
Weight	Approx. 18 kg (39-11/16 lb)

*1 Long edge feed 

* Thick paper 1: 91 to 120 g/m², Thick paper 1+: 121 to 157 g/m², Thick paper 2: 158 to 209 g/m², Thick paper 3: 210 to 256 g/m²



Large Capacity Unit LU-205 (Optional)

Support Paper Type (Weight)*	Thin paper (52 to 59 g/m ²), Plain paper (60 to 90 g/m ²), Thick paper (91 to 256 g/m ²)
Support Paper Size	SRA3 to A4, 12" x 18" to 8-1/2" x 11"
Paper Capacity	Plain paper: 2,500 sheets (80 g/m ²)/2,750 sheets (60 g/m ²) Thick paper 1: 2,000 sheets, Thick paper 1+: 1,450 sheets, Thick paper 2: 1,250 sheets, Thick paper 3: 1,000 sheets
Power Requirements	Supplied from the MFP main body
Max. Power Consumption	40 W or less
Dimensions [W] x [D] x [H]	629 x 556 x 405 mm (24-3/4" x 21-7/8" x 15-15/16")
Weight	Approx. 25 kg (55-1/8 lb)

* Thick paper 1: 91 to 120 g/m², Thick paper 1+: 121 to 157 g/m², Thick paper 2: 158 to 209 g/m², Thick paper 3: 210 to 256 g/m²

SPECIFICATIONS - bizhub 758 / 958

Finisher FS-537 (Optional)



Type	Finisher	
Support Paper Type	Thin paper / Plain paper (52 to 90 g/m ²), Thick paper (91 to 220 g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Tab paper	
Support Paper Size	A3 to A5, B6 ¹ , A6 ¹ , 11" x 17" to 5-1/2" x 8-1/2", 16K, 8K, Postcard (A6 (4" x 6" Card))	
Mode	Sort, Group, Offset Sort, Offset Group, Staple	
Stacking capacity	Output Tray 1	200 sheets (52 to 90 g/m ²) 20 sheets (91 to 220 g/m ² , special paper)
	Output Tray 2	3,000 sheets (52 to 90 g/m ² , A4* ¹ or smaller, B5 or larger) 1,500 sheets (52 to 90 g/m ² , B4 or larger) 500 sheets (52 to 90 g/m ² , A5 or smaller) 20 sheets (91 to 220 g/m ² , special paper)
	Output Tray 3 (Relay Unit top surface)	100 sheets (52 to 90 g/m ²) 20 sheets (91 to 220 g/m ² , special paper)
Staple capacity	100 sheets (Thin paper, Plain paper 52 to 80 g/m ²) 30 sheets (Plain paper 81 to 90 g/m ²) 35 sheets (Coated paper 81 to 90 g/m ²) 2 sheets (Thick paper 91 to 209 g/m ² Cover sheets only)	
Power Requirements	Supplied from the MFP main body	
Max. Power Consumption	140 W or less	
Dimensions [W] x [D] x [H]	622 x 692 x 1,031 mm (24-1/2" x 27-1/4" x 40-9/16")	
Weight	Approx. 47 kg (103-5/8 lb)	

*1 Short edge feed 

Finisher FS-537SD (Optional)



Type	Finisher	
Support Paper Type	Thin paper / Plain paper (52 to 90 g/m ²), Thick paper (91 to 220 g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Tab paper Centre Staple: 52 to 90 g/m ² Half-Fold: 52 to 209 g/m ² (more than 91 g/m ² Thick paper can be used only as a cover page) Tri-Fold: 52 to 90 g/m ²	
Support Paper Size	A3 to A5, B6 ¹ , A6 ¹ , 11" x 17" to 5-1/2" x 8-1/2", 16K, 8K, Postcard (A6 (4" x 6" Card)) Centre Staple, Half-Fold: SRA3, A3, B4, A4 ¹ , 11" x 17", 8-1/2" x 14", 8-1/2" x 11" ¹ , 8K Tri-Fold: A4 ¹ , 8-1/2" x 11" ¹ , 16K ¹	
Mode	Sort, Group, Offset Sort, Offset Group, Staple	
Staple capacity	100 sheets (Thin paper, Plain paper 52 to 80 g/m ²) 30 sheets (Plain paper 81 to 90 g/m ²) 35 sheets (Coated paper 81 to 90 g/m ²) 2 sheets (Thick paper 91 to 209 g/m ² Cover sheets only)	
Maximum Number of Sheets that can be Centrestapled	20 (52 to 90 g/m ²) sheets, or 19 (90 g/m ²) sheets + Thick (209 g/m ²) 1 sheet	
Maximum Number of Folded Sheets	Half-Fold: 5 sheets or Thick (91 to 209 g/m ²) 1 sheet, Tri-Fold: 3 sheets	
Stacking capacity	Output Tray 1	200 sheets (52 to 90 g/m ²) 20 sheets (91 to 220 g/m ² , special paper)
	Output Tray 2	2,500 sheets (52 to 90 g/m ² , A4* ¹ or smaller, B5 or larger) 1,500 sheets (52 to 90 g/m ² , B4 or larger) 500 sheets (52 to 90 g/m ² , A5 or smaller) 20 sheets (91 to 220 g/m ² , special paper)
	Output Tray 3 (Relay Unit top surface) Folding output tray	100 sheets (52 to 90 g/m ²) 20 sheets (91 to 220 g/m ² , special paper) 1 to 5 sheets: 35 sets 6 to 10 sheets: 30 sets 11 to 20 sheets: 10 sets Half-Fold (1 to 5 sheet): 35 sets Tri-Fold (1 sheet): 50 sets, (2 sheet): 40 sets, (3 sheet): 30 sets
Power Requirements	Supplied from the MFP main body	
Max. Power Consumption	140 W or less	
Dimensions [W] x [D] x [H]	622 x 692 x 1,031 mm (24-1/2" x 27-1/4" x 40-9/16")	
Weight	Approx. 73 kg (160-15/16 lb)	

*1 Short edge feed 

Post Inserter PI-507 (Optional)



Applicable	Finisher FS-537/FS-537SD	
Support Paper Type (Weight)	Plain paper (60 to 90 g/m ²) Thick paper (91 to 209 g/m ²)	
Support Paper Size	Upper Tray	A4, B5, A5* ¹ 8-1/2" x 11", 7-1/4" x 10-1/2"* ² , 5-1/2" x 8-1/2", 16K
	Lower Tray	SRA3, A3 to A5* ¹ 12-1/4" x 18" (A3 wide (311.1 x 457.2mm)), 11" x 17" to 5-1/2" x 8-1/2"* ¹ , 16K, 8K
Paper Capacity	200 sheets (Plain paper, 80 g/m ²)	
Power Requirements	Supplied from Finisher FS-537/FS-537SD	
Dimensions [W] x [D] x [H]	513 x 635 x 222 mm (20-3/16" x 25" x 8-3/4")	
Weight	Approx. 12 kg (26-7/16 lb)	

*1 Long edge feed 

*2 Short edge feed 

Job Separator JS-602 (Optional)



Applicable	Finisher FS-537/FS-537SD	
Support Paper Type (Weight)	Plain paper (60 to 90 g/m ²)	
Support Paper Size	A3 to B5, A4* ¹ , A5* ¹ 11" x 17" to 7-1/4" x 10-1/2", 5-1/2" x 8-1/2"* ¹ , 8" x 13", 16K, 8K	
Power Requirements	Supplied from Finisher FS-537/FS-537SD	
Max. Power Consumption	5 W or less	
Dimensions [W] x [D] x [H]	341 x 537 x 149 mm (13-7/16" x 21-1/8" x 5-7/8")	
Weight	Approx. 1.75 kg (3-7/8 lb)	

*1 Short edge feed 

Z Folding Unit ZU-609 (Optional)



Applicable	Finisher FS-537/FS-537SD	
Paper Type	Thin paper, Plain paper	
Paper Size	A3, B4, 11" x 17", 8-1/2" x 14", 8K	
Paper Weight	52 to 90 g/m ²	
Power Requirements	Supplied from Finisher FS-537/FS-537SD	
Dimensions [W] x [D] x [H]	101 x 506 x 186 mm (4" x 19-15/16" x 7-5/16")	
Weight	Approx. 4.5 kg (9-15/16 lb)	

Punch Kit PK-523 (Optional)



Applicable	Finisher FS-537/FS-537SD
Number of holes	2 holes, 3 holes, 4 holes
Support Paper Type (Weight)	Thin paper (52 to 59 g/m ²), Plain paper (60 to 90 g/m ²), Thick paper (91 to 300 g/m ²)
Support Paper Size	A3 to A5, 11" x 17" to 5-1/2" x 8-1/2", 8" x 13", 16K, 8K
Power Requirements	Supplied from Finisher FS-537/FS-537SD
Dimensions [W] x [D] x [H]	147 x 639 x 234 mm (5-13/16" x 25-3/16" x 9-3/16")
Weight	Approx. 4.5 kg (9-15/16 lb)

Finisher FS-536 (Optional)



Type	Finisher	
Support Paper Type	Thin paper / Plain paper (52 to 90 g/m ²), Thick paper (91 to 220 g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Tab paper	
Support Paper Size	A3 to A5, B6 ¹ , A6 ¹ , 11" x 17" to 5-1/2" x 8-1/2", 16K, 8K, Postcard (A6 (4" x 6" Card))	
Mode	Sort, Group, Offset Sort, Offset Group, Staple	
Stacking capacity	Output Tray 1	200 sheets (52 to 90 g/m ²) 20 sheets (91 to 220 g/m ² , special paper)
	Output Tray 2	3,000 sheets (52 to 90 g/m ² , A4* ¹ or smaller, B5 or larger) 1,500 sheets (52 to 90 g/m ² , B4 or larger) 500 sheets (52 to 90 g/m ² , A5 or smaller) 20 sheets (91 to 220 g/m ² , special paper)
	Output Tray 3 (Relay Unit top surface)	100 sheets (52 to 90 g/m ²) 20 sheets (91 to 220 g/m ² , special paper)
Staple capacity	50 sheets (Thin paper, Plain paper 52 to 90 g/m ²) 30 sheets (Thick paper 91 to 120 g/m ²) 15 sheets (Coated paper 121 to 209 g/m ²)	
Power Requirements	Supplied from the MFP main body	
Max. Power Consumption	105 W or less	
Dimensions [W] x [D] x [H]	528 x 641 x 1,023 mm (20-5/8" x 25-1/4" x 40-1/4")	
Weight	Approx. 36 kg (79-3/8 lb)	

*1 Short edge feed 

Finisher FS-536SD (Optional)



Type	Finisher	
Support Paper Type	Thin paper / Plain paper (52 to 90 g/m ²), Thick paper (91 to 220 g/m ²), Transparency, Envelope, Label sheet, Letterhead paper, Tab paper Centre Staple: 52 to 90 g/m ² Half-Fold: 52 to 90 g/m ² (more than 91 g/m ² Thick paper can be used only as a cover page) Tri-Fold: 52 to 90 g/m ²	
Support Paper Size	A3 to A5, B6 ¹ , A6 ¹ , 11" x 17" to 5-1/2" x 8-1/2", 16K, 8K, Postcard (A6 (4" x 6" Card)) Centre Staple, Half-Fold: SRA3, A3, B4, A4 ¹ , 11" x 17", 8-1/2" x 14", 8-1/2" x 11" ¹ , 8K Tri-Fold: A4 ¹ , 8-1/2" x 11" ¹ , 16K ¹	
Mode	Sort, Group, Offset Sort, Offset Group, Staple	
Staple capacity	50 sheets (Thin paper, Plain paper 52 to 90 g/m ²) 30 sheets (Thick paper 91 to 120 g/m ²) 15 sheets (Coated paper 121 to 209 g/m ²)	
Maximum Number of Sheets that can be Centrestapled	20 (52 to 90 g/m ²) sheets, or 19 (90 g/m ²) sheets + Thick (209 g/m ²) 1 sheet	
Maximum Number of Folded Sheets	Half-Fold: 5 sheets or Thick (91 to 209 g/m ²) 1 sheet, Tri-Fold: 3 sheets	
Stacking capacity	Output Tray 1	200 sheets (52 to 90 g/m ²) 20 sheets (91 to 220 g/m ² , special paper)
	Output Tray 2	2,000 sheets (52 to 90 g/m ² , A4* ¹ or smaller, B5 or larger) 1,500 sheets (52 to 90 g/m ² , B4 or larger) 500 sheets (52 to 90 g/m ² , A5 or smaller) 20 sheets (91 to 220 g/m ² , special paper)
	Output Tray 3 (Relay Unit top surface) Folding output tray	100 sheets (52 to 90 g/m ²) 20 sheets (91 to 220 g/m ² , special paper) 1 to 3 sheets: 20 sets 4 to 10 sheets: 10 sets 11 to 20 sheets: 5 sets Tri-Fold (1 sheet): 30 sets Tri-Fold (2 to 3 sheets): 10 sets
Power Requirements	Supplied from the MFP main body	
Max. Power Consumption	140 W or less	
Dimensions [W] x [D] x [H]	528 x 641 x 1,023 mm (20-5/8" x 25-1/4" x 40-1/4")	
Weight	Approx. 60 kg (132-5/8 lb)	

*1 Short edge feed 

Punch Kit PK-520 (Optional)



Applicable	Finisher FS-536/FS-536SD	
Number of holes	2 holes, 3 holes, 4 holes	
Support Paper Type (Weight)	Thin paper (52 to 59 g/m ²), Plain paper (60 to 90 g/m ²), Thick paper (91 to 300 g/m ²)	
Support Paper Size	A3 to A5, 11" x 17" to 7-1/4" x 10-1/2", 16K, 8K	
Power Requirements	Supplied from Finisher FS-536/FS-536SD	
Dimensions [W] x [D] x [H]	61 x 492 x 142 mm (2-3/8" x 19-3/8" x 5-9/16")	
Weight	Approx. 1.8 kg (3-15/16 lb)	



FOR THE EARTH. FOR THE FUTURE.

KONICA MINOLTA BUSINESS SOLUTIONS (M) SDN BHD (72640-P)

Infinite Centre, Lot 1, Jalan 13/6, 46200 Petaling Jaya, Selangor, Malaysia.

Contact Us:

Sales & Marketing:

Tel : +603-7801 2611

Fax : +603-7954 8316

Email: marketing.1@konicaminolta.com

Technical Support:

National Service Contact Center: 1-300-Call-KM (2255-56)

www.konicaminolta.com.my/business

Printed on **bizhub PRESS** C8000 