



Operator for
sliding gates of
up to 800 Kg

BX-68B

**The “customisable”
operator**

The Bx series offers a vast range of operators for all sliding gates weighing up to 800 Kg. It is a complete series, which best meets the diverse operational and safety requirements.



BX-68B

ZBX6B control panel

Extremely practical and completely safe

BX-68B is the right solution when automating sliding gates. Thanks to highest levels of efficiency and safety provided by the control board, BX-68B is suited for numerous application contexts, both in residential and apartment block settings. The Bx series also offers several versions to be used for intense work loads, and is ideal where there are frequent power outages.



Movement control.
BX-68B enables you to stop the gate directly from the transmitter, giving you total control of the system. (function OPEN - STOP - CLOSE).

Designed to last over time.
The high degree of sturdiness of all the components provides maximum endurance against the atmospheric agents.

Patented position total adjustment.
The operator can be adapted to the rack position thanks to the special position adjustment system. A Came patent.

The Electronics

Besides the normal command and safety functions, the new control board ZBX-6B supplied with the BX-68B model provides certain special features which enables total control of the automated unit and optimal service, such as:


- > **Photocells can be connected** to obtain re-opening during the closing cycle.
- > **Total stop of the gate movement** without automatic closing: a pushbutton or radio remote control must be activated to resume movement.
- > **Gate stopping directly from the radio transmitter:** to always handy control of the gate.

The range

BX-68B
Operator with module 4 pinion complete mechanical endstops for sliding gates of up to 800 Kg.

ZBX6B
Control panel with radio decoder. (function OPEN - STOP - CLOSE from radio transmitter).

Dimensions



Technical features

Type	BX-68B
Protection rating	IP54
Power supply (V) (50/60Hz)	230 AC
Motor power supply (V)	230 AC
Current draw (A)	2,4
Max power (W)	300
Manoeuvre speed (m/min)	10,5
Duty cycle (%)	30
Traction force (N)	800
Operating temperature (°C/F°)	-20 - +55


● 230 V AC

Limits to use

Type	BX-68B
Gate leaf weight (Kg)	800 (600 for intensive use)

● 230 V AC

Standard installation

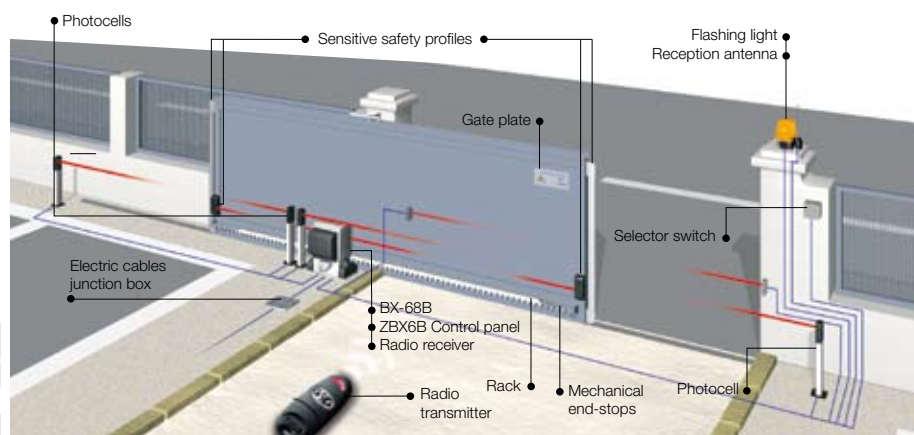

Came
cancelli automatici
S.p.A.

via Martiri della Libertà, 15
31030 Dossan di Casier - Treviso - Italy

www.came.com - info@came.it

