


#### TECHNICAL SPECIFICATION:

Working Voltage	DC 9 - 13.8 V
Working Current	< 150 mA
Operation Temperature	-10°C - 75°C
Reading Speed	< 0.2 s
User Capacity	1000
Housing Material	Zinc Alloy frame, cover PMMA
Size	133 x 45 x 19 mm

### WIRING DIAGRAM:

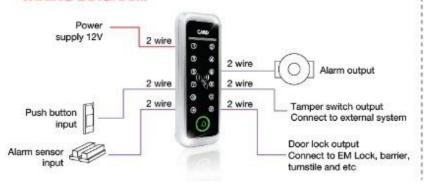

# **AR170S**

## Standalone Metal Reader

AR170S is made of high-quality metal, and the touch panel is used instead of the button to improve the aesthetic appearance of the product. And it support three types of open door password combination. AR170S has a tamper alarm function to improve its safety performance. This standalone reader is easy to install and is the ideal choice for access control devices used in office, homes, rooms and public spaces.

### PRODUCT FEATURES:

- Unique slim metal design to fit any site environment especially narrow door frame.
- 2 Illuminated LED light give visible apperance during night or under no light condition.
- Soft touch keypad allows you enter programming code or pin faster and conveniently without hard touch.
- Temper alarm function to prevent vandalism and unathourised break-in where it will activates the alarm output and sounds if removed or damaged by force.
- 5 Support card and/or pin up to 1000 users which is suitable for small office.

### DIMENSION:

