


Publish Date : 16.12.2019 | Rev no: 01

# PowerPRO Cat.5e UTP Solid RJ45 Plug


## Applications

- 10 Base-T (IEEE 802.3)
- Fast Ethernet (IEEE 802.3u)
- 100Vg-AnyLAN (IEEE 802-12)
- Token Ring (IEEE 802.5)
- TP-PMD (ANSI X 3T9.5)
- 100 Mbps CDDI
- ATM 155
- Gigabit 1000 Mbps (802.3z)

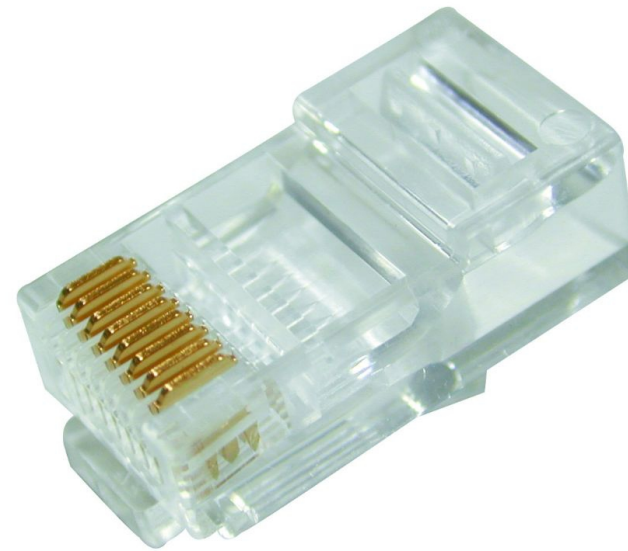

## Standards

- ETL Verified
- ANSI/TIA-568-2.D
- ISO/IEC 11801
- EN 50173

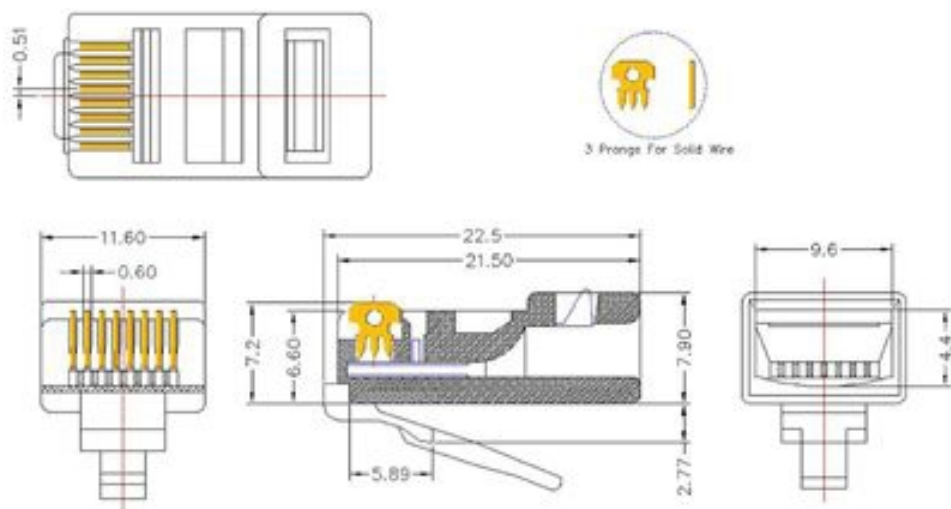

## Electrical Characteristics

- Dielectric with standing voltage: 1000VAC (RMS)
- Contact resistance: 10 milliOhms max.
- Current rating: 30 VAC at 1.5 AMPS
- Insulation resistance: 500 Megaohms min.

## Mechanical

- Cable-to-Plug tensile Round & flat cable available
- Strength:20 lbs. min.
- Durability:750 cycles min.
- Operating temperature : -20°C to +75°C

## Material and Finish

- Housing: Poly-carbonate
- Contact:Copper alloy 50u" gold over nickel

## Ordering Information

Product Number	Product Name	Category	Std Pkg Qty	Std Ctn Qty
1501-88052	Cat.5e RJ45 plug for unshielded solid wire 24-26AWG (3 prong)	Cat.5e	1200pcs/box	7200pcs/carton
1501-88053	Cat.5e RJ45 plug for unshielded stranded wire 24-26AWG (2 prong)	Cat.5e	1200pcs/box	7200pcs/carton
1501-88054	Cat.5e RJ45 plug for shielded solid wire 24-26AWG (3 prong)	Cat.5e	1200pcs/box	7200pcs/carton
1501-88055	Cat.5e RJ45 plug for shielded stranded wire 24-26AWG (2 prong)	Cat.5e	1200pcs/box	7200pcs/carton