


Publish Date : 16.12.2019 | Rev no: 02

PowerPRO Cat.5e S/FTP 24AWG PVC Cable

DINTEK PowerPRO™ Category 5E 4 Pair S/FTP cable, has been designed to support high speed data transmission systems.

This cable is part of the PowerPRO™ System range of products, that have been designed based on the PowerSum principle of crosstalk measurement and testing. We recommend that the full range of PowerPRO™ products is used in a system to maximize cabling performance, providing extended frequency response and enhanced bandwidth.

When combined as an end to end solution, the PowerPRO™ system, when installed by a certified installer can be warranted for 25yrs.

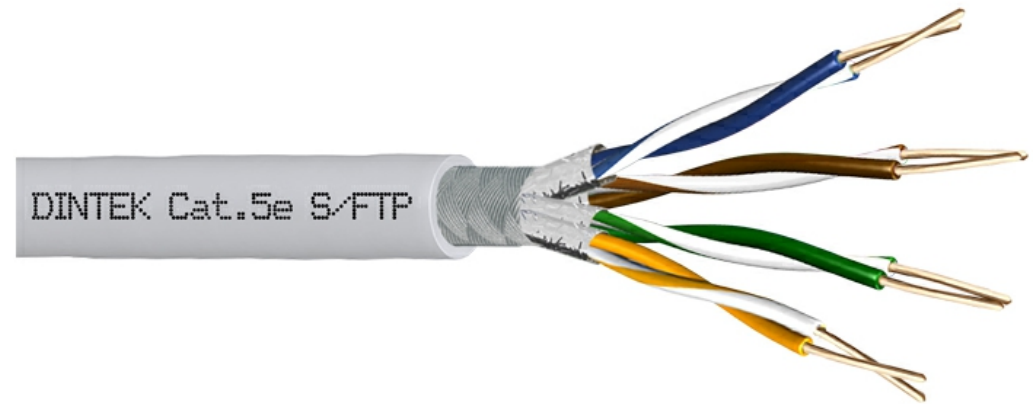


Applications

- Voice; T1; ISDN
- 100BASE-T Ethernet (IEEE802.3)
- 155/622Mbps 1.2/2.4 Gbps ATM
- 1000Mbps Gigabit Ethernet
- 550MHz Broadband Video
- Power Over Ethernet

Standards Conformance

- ANSI/TIA-568-2.D Cat.5e
- ISO/IEC 2nd Edition 11801 Class D
- CENELEC EN 50173-1
- IEC 61156-5, CENELEC EN 50288-3-1 for horizontal cable
- Flame Retardancy is Verified According to IEC 60332-1-2
- IEEE 802.3af-2003 , 802.3at-2009, IEEE 802.3bt

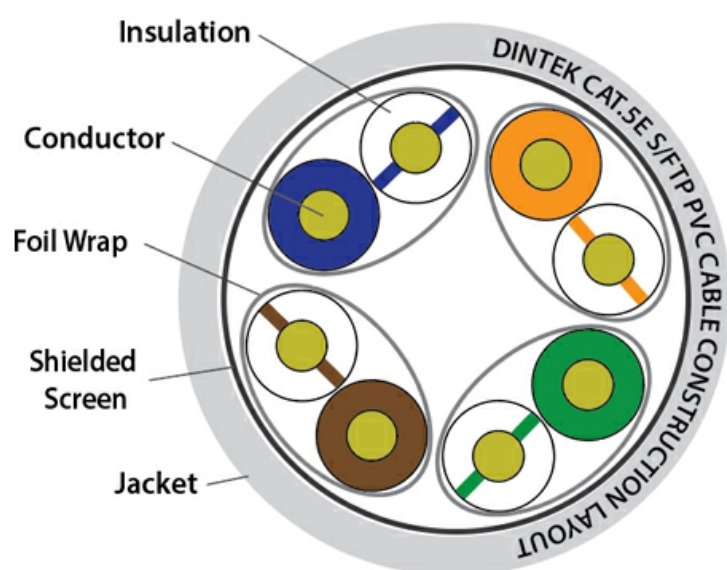

Performance Statistics

Frequency Mhz	Insertion Loss dB / 100mtrs	NEXT (dB)	PSNEXT (dB) Min.
1	2.0	65.3	62.3
4	4.1	56.3	53.3
8	5.8	51.8	48.8
10	6.5	50.3	47.3
16	8.2	47.2	44.2
20	9.3	45.8	42.8
25	10.4	44.3	41.3
31.25	11.7	42.9	39.9
62.5	17.0	38.4	35.4
100	22.0	35.3	32.3
125	25.0	33.8	30.8

Ordering Information

Product Number	Product Name	Jacket Type	Color	Length Qty
1105-03001	PowerPRO Cat.5e S/FTP 24AWG PVC Cable	PVC	Gray	305m/Box

Technical Specifications

Construction		
Conductor		
Material	Solid anneal copper wire	
Wire Size	24AWG	
Insulation		
Material	Polyethylene	
Thickness	Nominal: 0.275 mm	
Diameter	1.02±0.05mm	
Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown	
Individual Shielding	Maylar film as a layer of buffer / Aluminum-foil-laminated shield	
Jacket		
Material	Flame Retardant PVC	
Diameter	6.5±0.2mm	
Color	Gray	
Outer Shielding	Tinned copper wire braid shield with nom. 60%	
Physical Ranges		
Jacket		
Min. Tension Strength		
	Before Aging	min 1500psi
	After Aging	70% of before aging
Min Elongation (%)		
	Before Aging	Min. 100%
	After Aging	Min. elongation retention:65%
Dielectric Strength	1 kV / 1 minute, without any breakdown.	
Min. Bending Radius	25mm	
Max. Pulling Tension	25lb / Mtr (8-10kg)	
Installation Temperature	0°C to +50°C	
Operating Temperature	-20°C to +75°C	
Electrical		
Conductor Resistance	9.38Ω/100m at 20	
DC Resistance Unbalance	max. 2% at 20°C	
Pair-to-Ground Capacitance Unbalance	max. 160pf/100m at 1 kHz	
Dielectric Strength of Insulation	1 kV / 1 minute, without any breakdown.	
Insulation Resistance Test	5000MΩ/Km at 20°C	
Mutual Capacitance	Max. 5.6nf/100m	
Impedance 1 ~ 125Mhz	100Ω±15%	

DINTEK Electronic Limited

中文: 台北市中山區中山北路二段96號 嘉新第二大樓五樓N511 英文
 N511, 5F, 2nd Bldg, No. 96, Sec. 2, Zhongshan N. Rd., Zhongshan Dist., Taipei City 10449, Taiwan (R.O.C.)
 P: Office: +886-2-22997898 E-mail: sales@dintek.com.tw W: www.dintek.com.tw

1105-03001