

CNC-3312-S – 2MP WDR SMART IR IP Dome Camera



2 Mega

WDR

Face Recognition

H.265+

Alarm

Audio

Starlight

20m IR

IP67


IK10

μSD


ONVIF

Features

- **2Megapixel** 1920x1080 @25fps
- **H.265+** Compression
- 3.6mm Fixed Lens
- BLC, HLC, Defog, 3DDNR, ROI etc
- 120dB True **WDR**
- **Audio** : Build-in Mic + 1 Audio In
- **Alarm** : 1 in / 1 out
- Support μSD up to 128GB
- POE / 12VC Dual Power, CVBs
- Smart Functions : **Object Removal, Line Crossing, Area Intrusion, People Counting, Crowd Density, Face Recognition**



119.00mm

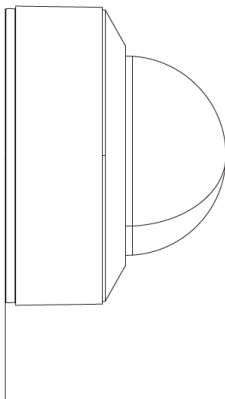

87.80mm

SPECIFICATION

Model	CNC-3312-S
Image Sensor	1/2.8" progressive scan CMOS Sensor
Resolution	1920x1080 / 720p @25fps
Shuttle	1/25s ~ 1/100,000s
Lens	M12 3.6mm Fixed Lens
LEDs	850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0 Lux up to 20m
Network	10/100-BaseT, RJ45
Bit Rate	128Kbps ~ 6Mbps
Compression	3-Stream : H.265+ / H.264+
W. Environment	-30°~+60°C, <90° Humidity (Non-Condensing)
Power	POE IEEE 802.3af / 12VDC, <7.5W
Dimension	119mm(φ) x 88mm(H), 650g