







123 456 789

> Face ID 6 series is the all-new face and palm verification terminal equipped with the latest facial recognition technology, an all-rounded upgrade that results in greater performance and reliability. Not only it is affordable, but also a powerhouse in access control & time attendance, suitable for any industry looking to strengthen their security.

Palm

Password



Latest AI Face Recognition Technology Embedded with the ultimate light-proof function technology to verify faces successfully even in a variety of light conditions.



Verify with Mask On Verifies a face even with a mask on for better safety; the feature is optional yet crucial amid the pandemic.



Get Your Money's Worth This model offers an economical biometrics solution, providing efficiency and performance without breaking the bank.



Anti-Spoofing Checks The technology has been improved with better security configuration to prevent crimes and spoofing attempts.



Wider Face Recognition Angle tolerance as wide as +/-30° for both head rotation and tilt together with a recognition distance of 20cm.



Speedy Verification Accurate verifications in seconds, an essential feature for door access to ensure smooth people flow.








Palm Verification Wider Angle Tolerance +/-60° with a recognition distance of 50cm.



Efficient Data Processing Integrated with Ingress software, the bundled solution with door access and time attendance solution in one system.


WEB LINK

Product https://product.fingertec.com/userguide.php Quick Start Guide Installation Guide User Guide Video Guide Technical Tips

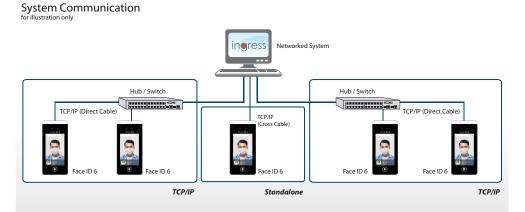

LAYOUT PLAN

Installation Diagram

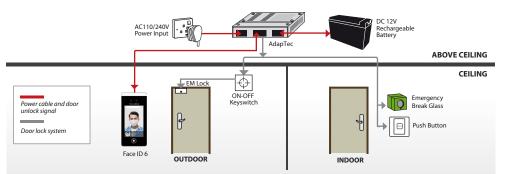

	SPECIFICATIONS
MODEL	Face ID 6
SURFACE FINISHING	Glass with aluminium frame
TYPE OF SCANNER	2MP Binocular Camera
MICROPROCESSOR	900 MHz Dual Core CPU
MEMORY	512MB RAM, 512MB Flash
ALGORITHM	Face: FTFace V3.9 & FTPalmVein 12.0
PUSH TECHNOLOGY	Yes
DIMENSION (L x W x H), mm	72 x 23 x 158
STORAGE	
Face templates	1,000
Palm templates	800
Transactions	150,000
ENROLLMENT & VERIFICATION	
Methods	Face (1:1, 1:N), Palm (1:N) & Password
Recommended per user ID	Face: 1, Palm: 1
Verification time (sec)	Face: <1s, Palm: <0.35s
COMMUNICATIONS	
Method	TCP/IP, USB Host & RS485
Wiegand	Input/Output
OPERATING ENVIRONMENT	
Temperature (°C)	0~45
Humidity (%)	10~90
Power Input	DC 12V 3A
MULTIMEDIA	
Display	4" touch screen
Photo-ID	Yes
ACCESS CONTROL	
Lock Relay Output	Yes
Alarm Output/Auxiliary Input	Yes
Exit Button/Door Sensor	Yes
VOICE/ DISPLAY LANGUAGE (TERMINAL)	English (Standard) Other languages are available upon request.



Packaging Dimension (mm) Weight

:225 (L) x 72 (W) x 168 (H) :1.10 kg

NOTE: Specifications are subject to change.



Authorized Reseller:

