



H3i Small in size, big on functions





H3i is simply the most compact and independent electronic reader from FingerTec yet! This latest automated access control device is able to function without any additional software, making it the perfect stand-alone solution for small businesses and homes where there is no need for tracking attendance. On top of its stylish design and sleek layout, H3i is a master terminal that supports verification via fingerprints, card IDs, 4-digit passwords, or a combination of any two of the three methods. Installations are also a breeze and can be done almost anywhere because of H3i's convenient dimensions. Compact but still capable of doing almost everything a regular-sized biometrics device can, FingerTec H3i simply proves that size, yet again, does not matter.



Petite but Packs a Punch H3i may be small and slim, but it still has enough processing power to ensure quick verification times of less than one second and enough memory to store a whopping 30,000 transactions!



Easy Installation

H3i takes minimal effort to install because of the device's simplicity, and coupled with its compact size, can be easily placed in any location of your choice.



Completely Stand-alone Device H3i can be used as a stand-alone device for simple access management, making it perfect as a

cost-effective and absolutely

no-hassle solution for your small



Simple Management & Enrollment

The H3i's simple outlook is complimented with a simple management system. Just key in your administrator password to start enrolling or deleting data.







Adaptability for Added Security

business office or home.

H3i is compatible with all 12VDC/ relay output electromagnetic locks and can also be connected to an NO alarm to provide added security to your space.



Combine Your Verification Methods

To further secure your space, H3i can accept six different combinations of fingerprint, card (either RFID or MiFARE) or password verification methods according to your preference.

Value for Money

Mix and match your FingerTec system with the Kadex family to give you more value for your money. The versatile family of readers will ensure the most cost-effective solution for your situation.



Clear-cut Notification of Events

A buzzer and LEDs are built-in in H3i to provide clear audio and visual notifications during any events that may occur at the device.



WEB LINK

Product

• http://info.fingertec.com/h3i-1

Installation Guide

http://info.fingertec.com/h3i-2


User Guide

• http://info.fingertec.com/h3i-3

LAYOUT PLAN

Installation Diagram

Power cable and door unlock signal
Door lock system

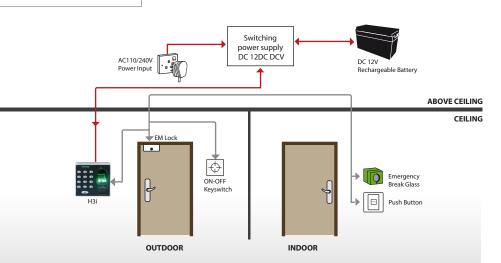

	SPECIFICATIONS
MODEL	H3i
SURFACE FINISHING	Acrylonitrile butadiene styrene (ABS)
TYPE OF SCANNER	Non coated optical scanner
MICROPROCESSOR	400 MHz
MEMORY	32 MB flash memory
ALGORITHM	BioBridge VX 10.0
PRODUCT DIMENSION (L X W X H), mm	88 x 25 x 88
STORAGE	00 × 25 × 00
Fingerprint templates	200
Cards	500
Passwords	8 sets (max length 4-digit per password)
• Methods	Fingerprint (1:N), card & password
Recommended fingerprint per user ID Fingerprint placement	Any angles
Fingerprint placement	Max 4
Password length (digit) Verification time (sec)	<1
	<0.0001
• FAR (%)	<1
• FRR (%)	
CARD TECHNOLOGY	
• RFID: 64-bit, 125kHz	Yes
• MIFARE: MFIS50/S70, 13.56MHz	Made to order
OPERATING ENVIRONMENT	
Temperature (°C)	0~45
• Humidity (%)	20~80
Power input	DC 12V 3A
ACCESS CONTROL	
EM lock driving output	DC 12V / relay output
• Alarm output	NO
Door sensor	Yes (NO/NC)
GROUP VERIFY TYPE	
Password only	Yes
Card only	Yes
Fingerprint only	Yes
Fingerprint / card / password	Yes
Card and password	Yes
Fingerprint and password	Yes

NOTE: Specifications are subject to change. Check http://product.fingertec.com for latest product information.



Authorized Reseller:



Dimension (mm) : 173 (L) x 60 (W) x 135 (H)

: 0.34 kg

FING

Packaging

Weight

072015