

# SMCL80-BZ-2-24-RG-TR

Multiple Color LED Steady/ Flashing  
Signal Light



## Common Specifications

- Injection machine specialized multiple color LED steady/flashing signal lights
- Injection machine specialized multi-colored LED signal lights that can choose various audible & visual signals
- This budget model uses a multiple color LED light source to provide signals in two colors.
- The subdued light provides a comfortable and stable viewing condition for operation in close proximity
- Materials : Lens-AS, Body-ABS, Reflector-Heat resistant ABS
- Volume : Max 90dB at 1m
- Flashing rate : 60-80 flashes/min
- Ambient operating temperature : -30°C to +50°C
- Protection rating : IP44
- RoHS Compliant




## SMCL80-BZ-2-24-RG-TR Multiple Color LED Steady/ Flashing LED Signal Lights

Model number	Layers	Voltage	Current	Certificates	Weight	Color
SMCL125	2	DC24V	0.063A	-	0.22kg	<div> <div></div> R-Red           <div></div> G-Green         </div>



## Technical Diagram

(Units : mm)

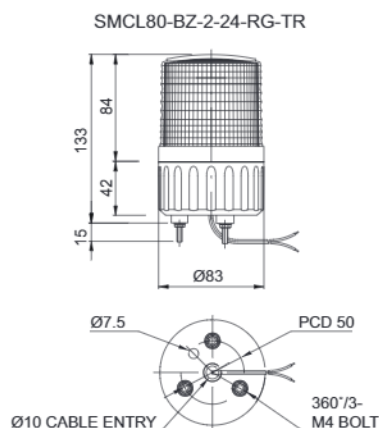


## Wiring Instructions

- SMCL type can be wired with external contacts and transistor
- Wiring to transistor, use the NPN transistor. Please wire properly based on wiring instructions
- External power line standard : UL1015 AWG18(0.75sq)×3C 500mm



## Wiring Instructions

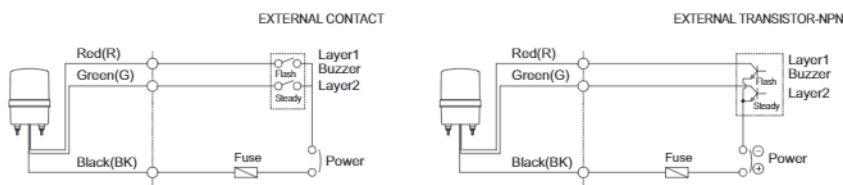

## Customization

- Wall mounting bracket options :  
Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount Bracket  
TWS80



Wall Mount Bracket  
TWA80



## Ordering Specification

SMCL80	BZ	2	24	RG
[Model number]	[Buzzer option]	[Color]	[Voltage]	[Color]
• SMCL80	• BZ - Built-in buzzer	2-2colors	• 24-DC24V	<div> <div></div> R-Red           <div></div> G-Green         </div>