




1 2 3 4 5 6 7 8

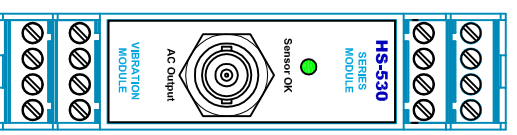



22.60

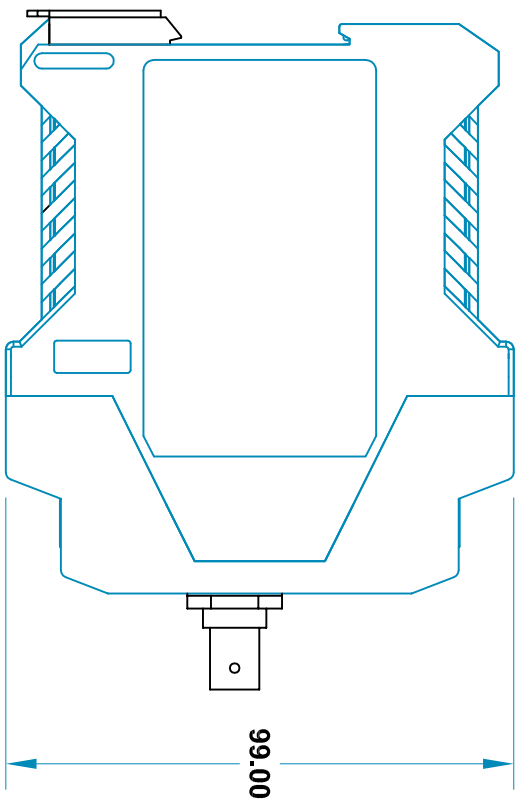

Terminal Connections

- 13 - 0V Power In
- 14 - 0V (GE AC Out)
- 15 - 0V (Vel. 0-10V Out)
- 16 - 0V (GE 0-10V Out)
- 9 - +24V In
- 10 - GE AC Out
- 11 - Velocity 0-10V Output
- 12 - GE 0-10V Output
- 5 - Accel. +ve In
- 6 - Accel. 0V In
- 7 - Accel. Screen (N/C)
- 8 - No Connection
- 1 - Accel. +ve In
- 2 - Accel. 0V In
- 3 - Accel. Screen (N/C)
- 4 - No Connection

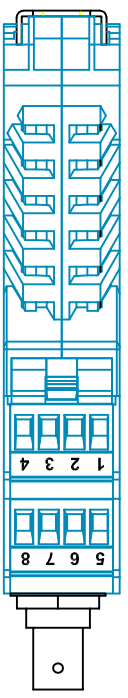

Rev No	DRF No	Date Drg	Drg By	Appd By	Material: N/A	 <p>Hansford Sensors Specialists In Vibration Monitoring</p> <p>Hansford Sensors Ltd Artisan, Hillbottom Road Sands Industrial Estate High Wycombe Bucks HP12 4HJ</p>	<p>Do Not Scale</p> <p>All Dimensions in mm Unless Otherwise Stated</p> <p>If In Doubt - Ask!</p>	<p>Description: HS-530 .dwg Drawing</p> <p>Drawing No: CD161-1</p> <p>Scale: 2 : 1</p> <p>Sheet: 1 of 1</p> <p>Form Number: QF024 Issue 3</p>
A	Release	26/10/16	MJS	MJS	<p>Tolerances Unless Stated</p> <p>0 or 0.0 ±0.5</p> <p>0.00 ±0.15</p> <p>Angle ±5°</p> <p>1/8" Finish All Over</p> <p>Threads g6 H6</p>			
F								
1	2	3	4	5	6	7	8	