


Features

- 12 inputs for 70/100V line amplifier outputs
- Dual mode monitoring with continuous sign
- Audio monitoring with volume control

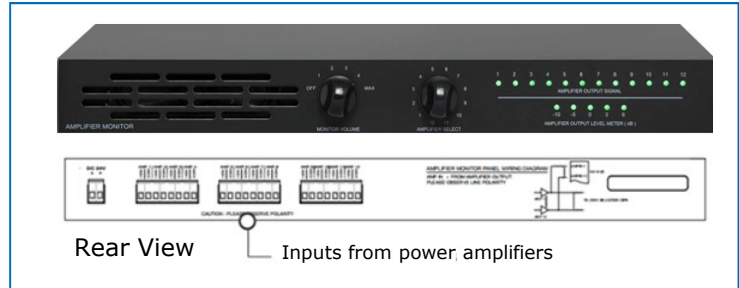

Description

MP 5312 shall be used to monitor amplifier outputs of 70 / 100V line at the rack which is equipped with level meter, amplifier output LED and speaker for audio monitoring. It can also be used as a tool to calibrate sound output level of each amplifier from the rack.

Technical Specifications

Operating Voltage	24V DC
Power Consumption	50 mW
Amplifier inputs	12 : 70 / 100V line
Monitoring mode	Audio : 1W speaker with 5 presets Visual : segment LED level meter LED for all channels
Dimensions (WxHxD)	482 x 44 x 180 mm
Weight	2.1 kg