



Emergency LED Power Pack




APPLICATION


- Great for home or business safety.
- Suitable for many kind of LED lights.
-T5/T8 LED tube 24W and below.
(Single or double enter).
- LED down light/LED eye ball (Below 24W).



LED Lamps Connection Diagram

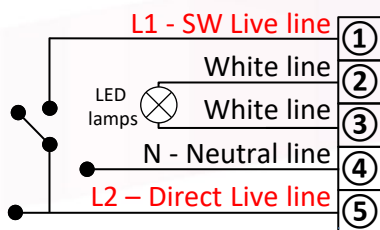

Dimension

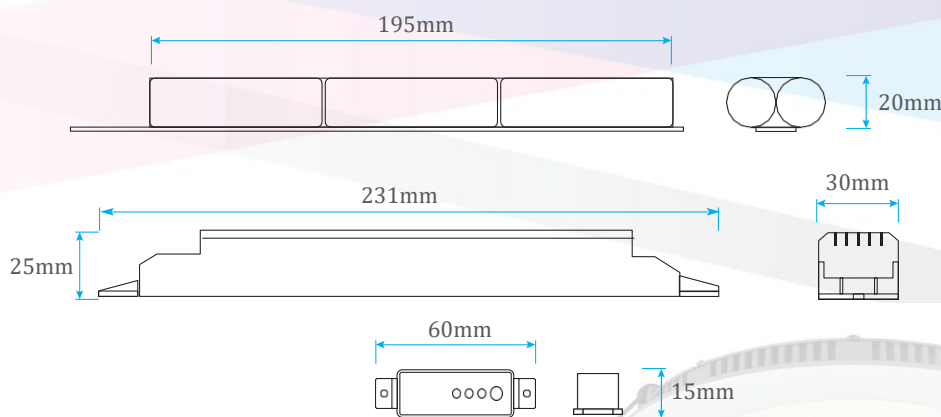

SPECIFICATION

Mode of Operation

Input Voltage

Battery

Lamp Used

Charger

Charging Current

Indication (Red LED)

Indication (Green LED)

Indication (Yellow LED)

Backup Time

Safety Feature

IP Grade

Working Temp

Warranty

- ▶ Maintained / Non-maintained
- ▶ 220V-240V/50Hz
- ▶ 11.1V Environmental Friendly Lithium-ion Battery (5200mAh)
- ▶ LED Tube / LED Downlight / LED Eyeball / LED Bulb ($\leq 24W$)
- ▶ Constant Voltage and Constant Current Charging System
- ▶ 180 ~ 300 mA Lithium-ion 11.1V
- ▶ Indicates Charging
- ▶ Full Charge
- ▶ False/Faulty
- ▶ 3 Hours Duration
- ▶ Over Charge & over discharge protection
- ▶ IP 30
- ▶ 10°C ~ 50°C
- ▶ 1 year

