



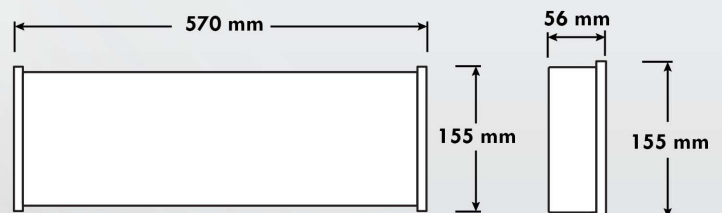

## BOX UP KELUAR SIGN (TR408)

<b>Model</b>	TR408
<b>Lamp-Mains "On"</b>	16 x 0.2W SMD LED
<b>Lamp-Mains "Off"</b>	16 x 0.2W SMD LED
<b>Battery Type</b>	3.6V 900mAh Ni-Cd Battery
<b>Weight</b>	1.4 kg
<b>Dimension</b>	570(L)mm x 155(W)mm x 56(H)mm
<b>Input Voltage</b>	240V ±10%, 50Hz
<b>Power Consumption</b>	<5VA
<b>Rated Duration</b>	3 Hours
<b>Mode of Operation</b>	Maintained
<b>Charger</b>	Solid State Electronic Automatic
<b>Charging Monitor</b>	Red LED 5mm Diameter
<b>Test Facility</b>	Independent Testing
<b>Operation Temperature</b>	35°C
<b>Safety Feature</b>	Low Voltage Cut-off to Prevent Over Discharge of the Battery
<b>Fitting Construction</b>	Metal Casing Finish In Epoxy Powder Coating
<b>Diffuser</b>	Arcylic Diffuser
<b>Mounting</b>	Wall Mounting
<b>Warranty</b>	1 Year from the Date of Delivery
<b>Certified Compliance</b>	MS 983 : 2004 MS 619-2-22 : 2012 MS IEC 60598-1 : 2012 BOMBA APPROVED

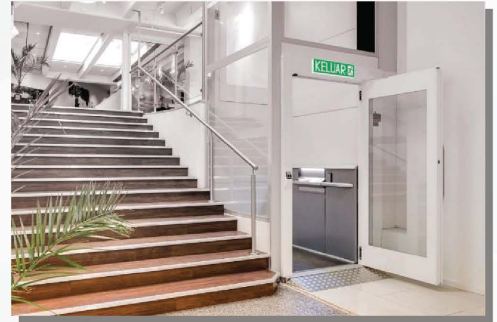

EMERGENCY LIGHT B-5  
/ KELUAR SIGN

- Quality Assured by Full SIRIM Licence in Malaysia since 1992.
- Approved by Director General of Fire Service in Malaysia.
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM).
- Approved by Chief Electrical Inspector of Malaysia.
- Complies Fully with Uniform Building By-Law Regulations in Malaysia.

Note: Due to continuous development and improvement, our company reserve the right to change specification without notice

