

BULB 9W (EQ.60W) A60 E27


The WiZ LED A60 full color bulb brings smart lighting for your daily living. Retrofit into any lamp shade to create the ambience of your choice with 16 million colors as well as warm to cool white light. You can set schedule to turn lights on and off according to daily or weekly routines, control with your smartphone or your voice and have remote access to your lights even when you're away. WiZ lights connect to your existing Wi-Fi, no additional hardware is needed.

[WHERE TO BUY](#)

PRODUCT HIGHLIGHTS


- 📍 Full color
- 📍 Plastic
- 📍 Easy plug and play
- 📍 Control with WIZ app or voice

[VIEW ALL PRODUCT SPECS >](#)

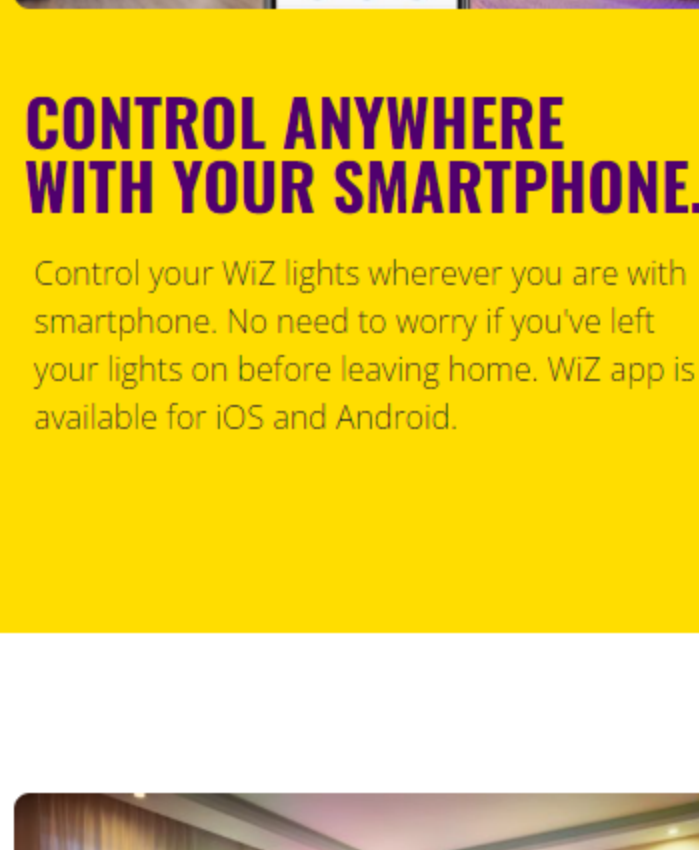


TUNABLE WARM TO COOL WHITE AND PRESET MODES

Choose from a wide range of energizing cool white to soft warm white, or simply select from the preset modes such as Focus and Relax to create the best ambience for your activities.

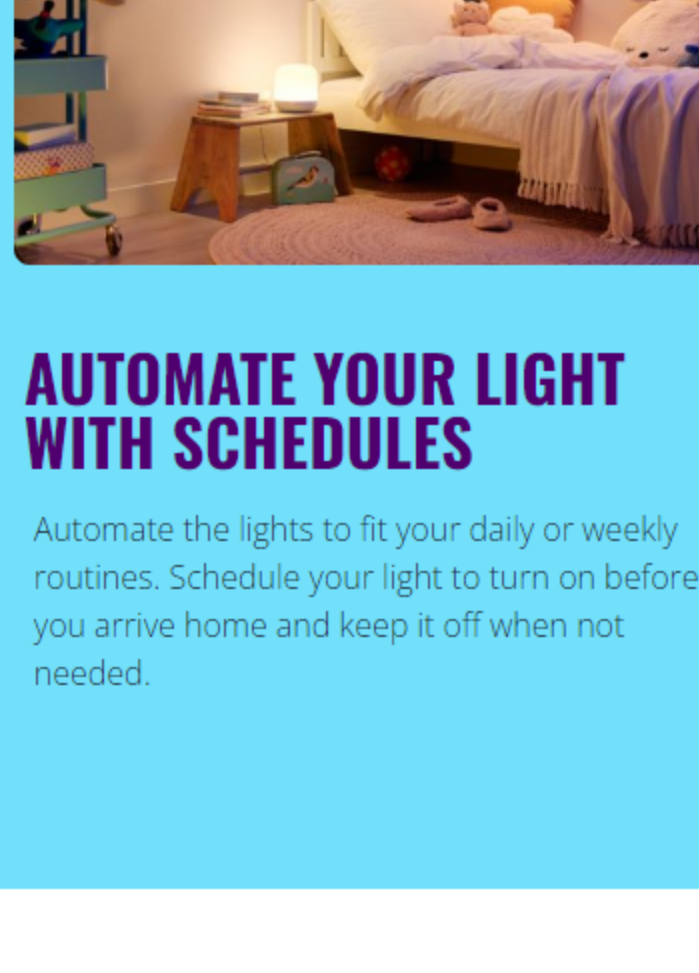


EASY PLUG AND PLAY. WORKS WITH YOUR EXISTING WI-FI.

WiZ works with your existing Wi-Fi router, no additional gateway is needed. Simply plug in your new light, download the WiZ app and you're ready to go!

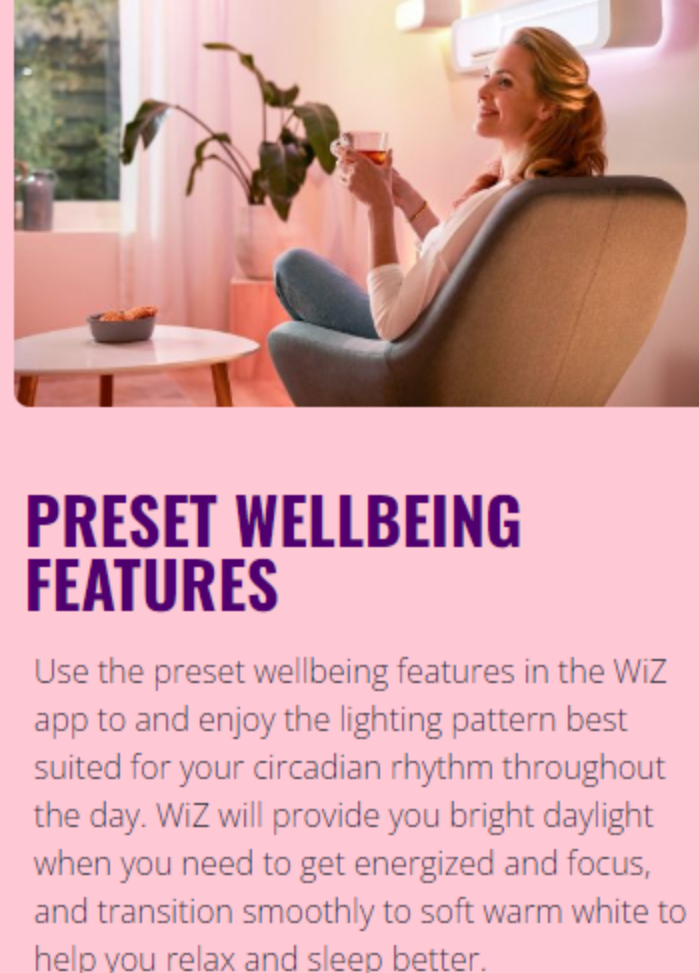


CONTROL ANYWHERE WITH YOUR SMARTPHONE.

Control your WiZ lights wherever you are with smartphone. No need to worry if you've left your lights on before leaving home. WiZ app is available for iOS and Android.

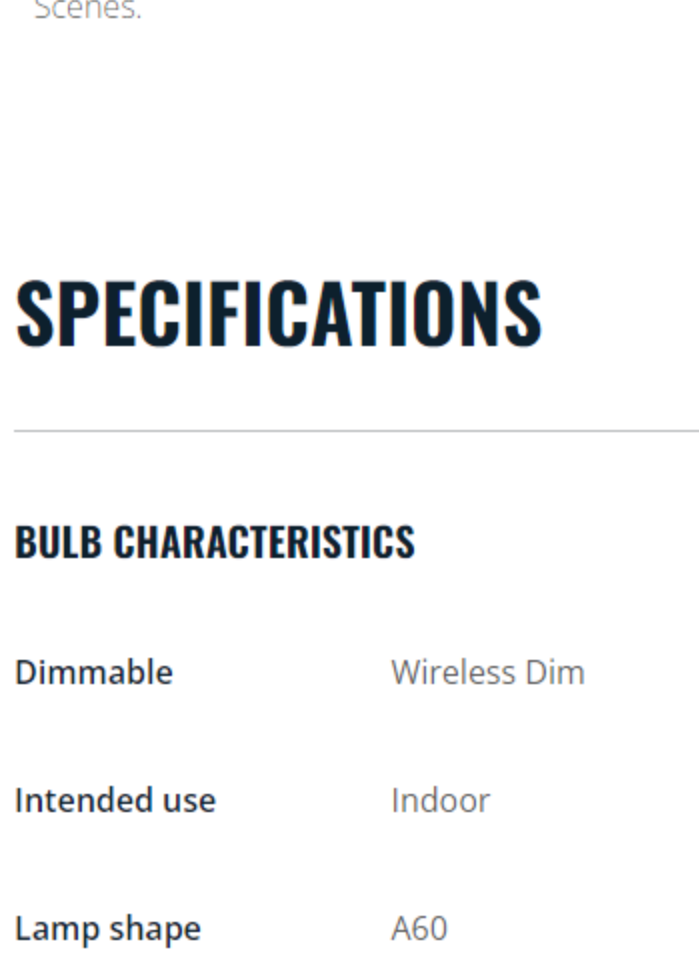


MILLIONS OF COLORS AND DYNAMIC LIGHT MODES

Choose from a palette of millions of light colors to create an amazing atmosphere in your home. Enjoy the subtle differences that our dynamic light effects glow your environment

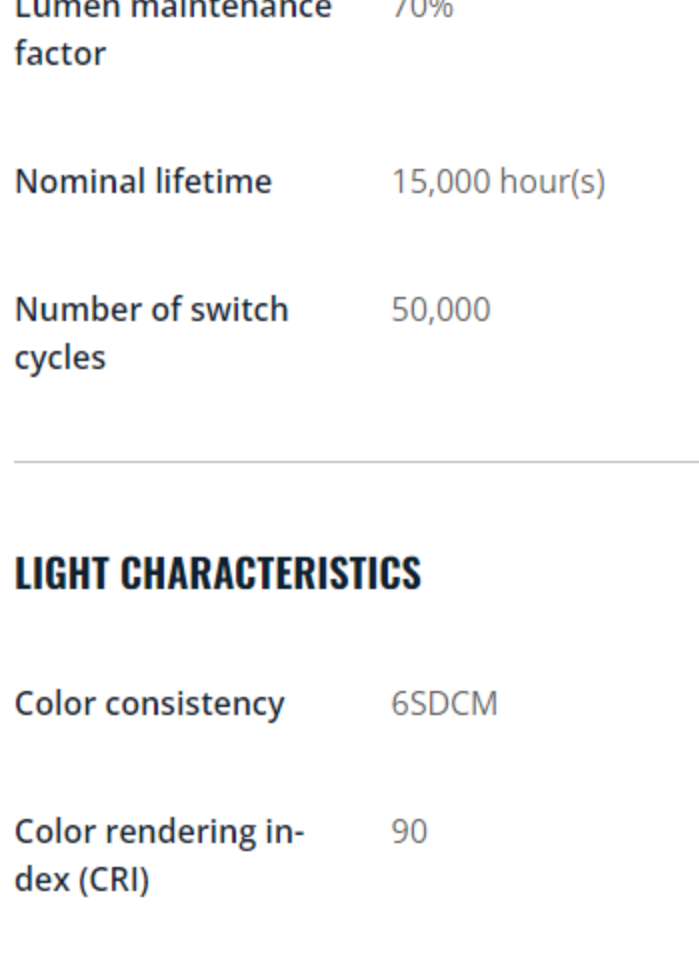


AUTOMATE YOUR LIGHT WITH SCHEDULES

Automate the lights to fit your daily or weekly routines. Schedule your light to turn on before you arrive home and keep it off when not needed.

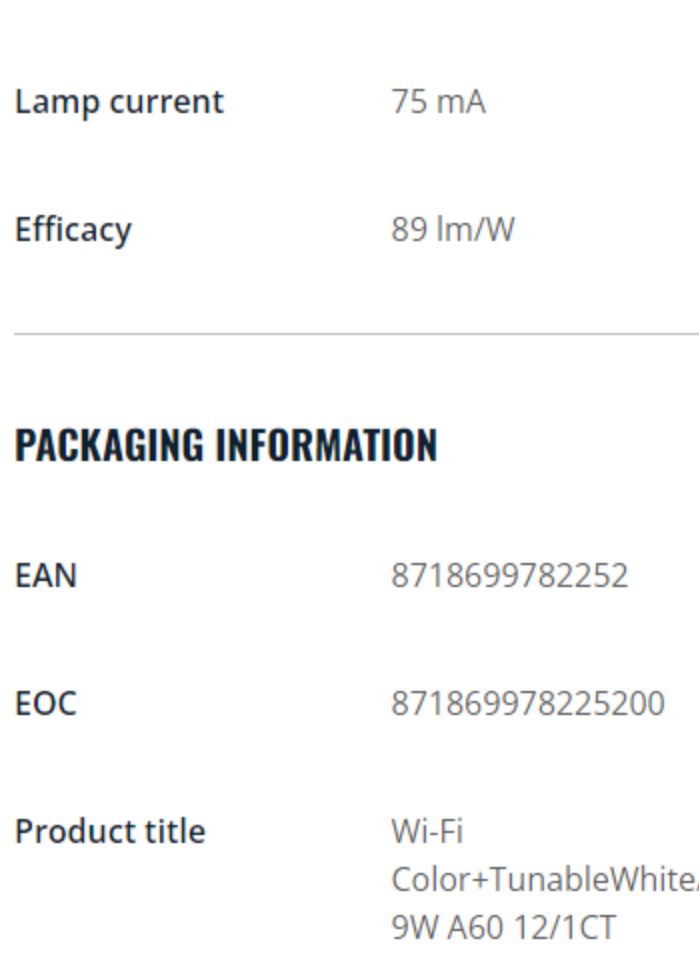

CUSTOMIZE SCENES WITH PRESET DYNAMIC LIGHT MODES.

Mix different color and white lights modes to create the perfect light ambience for your daily moment. Save it and call it out anytime with app, WiZmote or voice.

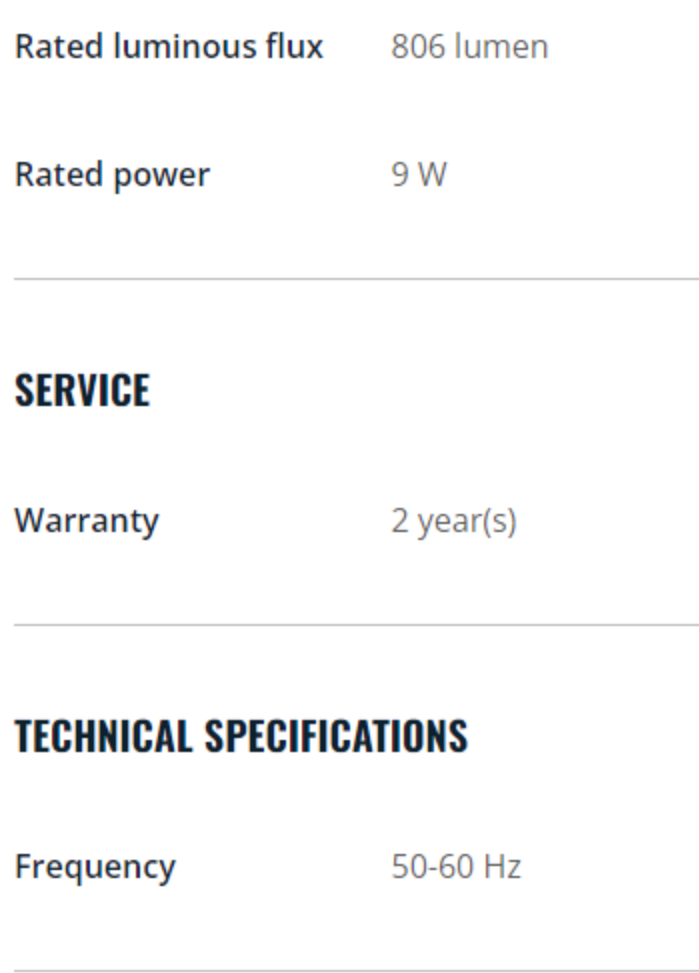

PRESET WELLBEING FEATURES

Use the preset wellbeing features in the WiZ app to and enjoy the lighting pattern best suited for your circadian rhythm throughout the day. WiZ will provide you bright daylight when you need to get energized and focus, and transition smoothly to soft warm white to help you relax and sleep better.



VOICE CONTROL WITH GOOGLE ASSISTANT, ALEXA OR SIRI SHORTCUTS

Get hands-free control of your lights by using your voice and Google Assistant, Amazon Alexa or Siri Shortcuts. Use simple voice commands to turn lights on or off, brighten and dim, change color, and set custom light Scenes.

SPECIFICATIONS

BULB CHARACTERISTICS

Dimmable	Wireless Dim
Intended use	Indoor
Lamp shape	A60
Socket	E27
Technology	Smart Wi-Fi
Type of glass	Frosted

BULB DIMENSIONS

Height	12.2 cm
Weight	0.06 kg
Width	6 cm

DURABILITY

Average life (at 2.7 hrs/day)	15 year(s)
Lumen maintenance factor	70%
Nominal lifetime	15,000 hour(s)
Number of switch cycles	50,000

LIGHT CHARACTERISTICS

Color consistency	6SDCM
Color rendering index (CRI)	90
Color temperature	2200-6500 K
Light Color Category	Color & Tunable White
Nominal luminous flux	806 lumen
Starting time	<0.5 s
Warm-up time to 60% light	poc
Color Code	922-965 CCT of 2200K-6500K(RGB)

MISCELLANEOUS

EyeComfort	Yes
------------	-----

OTHER CHARACTERISTICS

Lamp current	75 mA
Efficacy	89 lm/W

PACKAGING INFORMATION

EAN	8718699782252
EOC	871869978225200
Product title	Wi-Fi Color+TunableWhite/9W A60 12/1CT

POWER CONSUMPTION

Power factor	0.55
Voltage	220-240 V
Wattage	9 W
Wattage equivalent	60 W

PRODUCT DIMENSIONS & WEIGHT

Length	12.2 cm
--------	---------

RATED VALUES

Rated lifetime	15,000 hour(s)
Rated luminous flux	806 lumen
Rated power	9 W

SERVICE

Warranty	2 year(s)
----------	-----------

TECHNICAL SPECIFICATIONS

Frequency	50-60 Hz
-----------	----------

PACKAGING DIMENSIONS AND WEIGHT

EAN/UPC - product	8718699782252
Net weight	0.060 kg
Gross weight	0.110 kg
Height	13.000 cm
Length	7.000 cm
Width	7.000 cm
Material number (12NC)	929002411617

OTHER

User manual	No manual available
-------------	---------------------

#ConnectedLight

Select Country

[MALAYSIA - ENGLISH >](#)