AREX SOLAR STREET LANTERN LED BLACK - AR-SSL-15W

Auto Adjustment Working Mode:

i. Smart Button: ON/OFF

This lamp is with auto-adjusting working mode, only need to press the button once, it will work permanently.

ii. First 5 Hours Lighting

Automatically turns ON to full brightness (1600lm) when motion is detected in the range ≤8 meters and then turns to weak brightness in 20seconds if no motion.

iii. After 5 Hours Lighting or When Battery Capacity Below 30%

5 Minute Later

Automatically turns on to full brightness (1600lm) when motion is detected in the range ≤8 meters and then turns to weak brightness in 20 seconds if no motion, the turns off after 5 minutes.

Products Features:

Solar Powered (Big Panel)	$0 Zero Electrical cost
Motion Sensor Detective	Cordless
AUTO Light ONN/OFF automatically	IP65 IP65 Waterproof
Light Sensor Detective	Long working time

15W 1600LM

SUPER BRIGHT   ULTRA-THIN   BIG-CAPACITY

Arex Led Solar Street Lantern SSL-15W data sheet
Last update: August, 2020

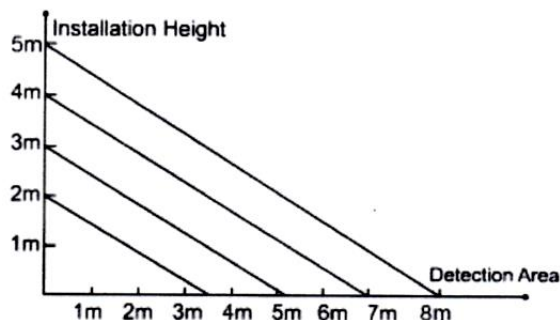## INSTALLATION HEIGHT

Application Area:

- Street, Garden, Pathway, Garage, Entrance, Courtyard, Others

PRODUCTS SPECIFICATIONS

Model:	**AR-SSL-15W**	**Product Code:**	**1023000014**
Wattage (W):	15W	**Led Quantity:**	40 pcs
Input Voltage (V):	5.6V – 8.4V	**Rated Lumen:**	1,600 lm
Working currents(A):	1800mA	**Lumen Efficiency:**	106lm/w
CCT:	6000K	**Beam Angle:**	$140^0 X90^0$
CRI:	≥80	**Rated Life(L70):**	35,000 Hours
Light Source:	SMD 2835	**Barcode:**	9 555106 308945
Operating Environment:	From -15℃ to +45℃		

Arex Led Solar Street Lantern SSL-15W data sheet
Last update: August, 2020