


## Emergency LED Power Pack

### APPLICATION


- Great for home or business safety.
- Suitable for many kind of LED lights.  
-T5/T8 LED tube 24W and below.  
(Single or double enter).
- LED down light/LED eye ball (Below 24W).



### LED Lamps Connection Diagram

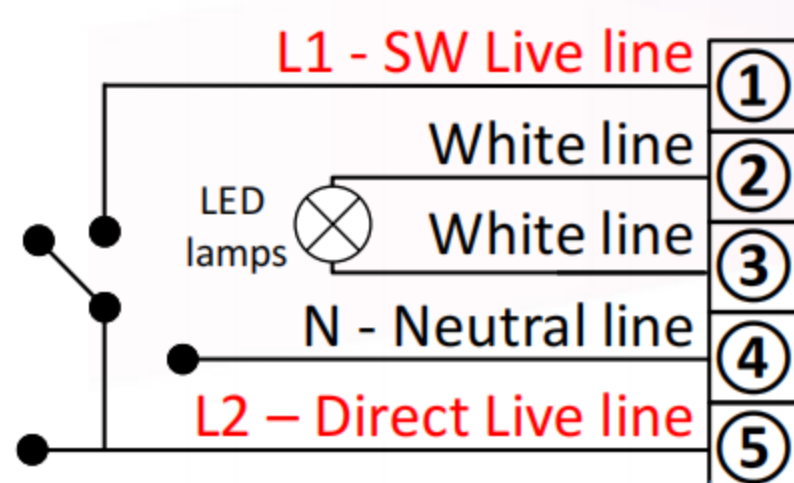

### Dimension

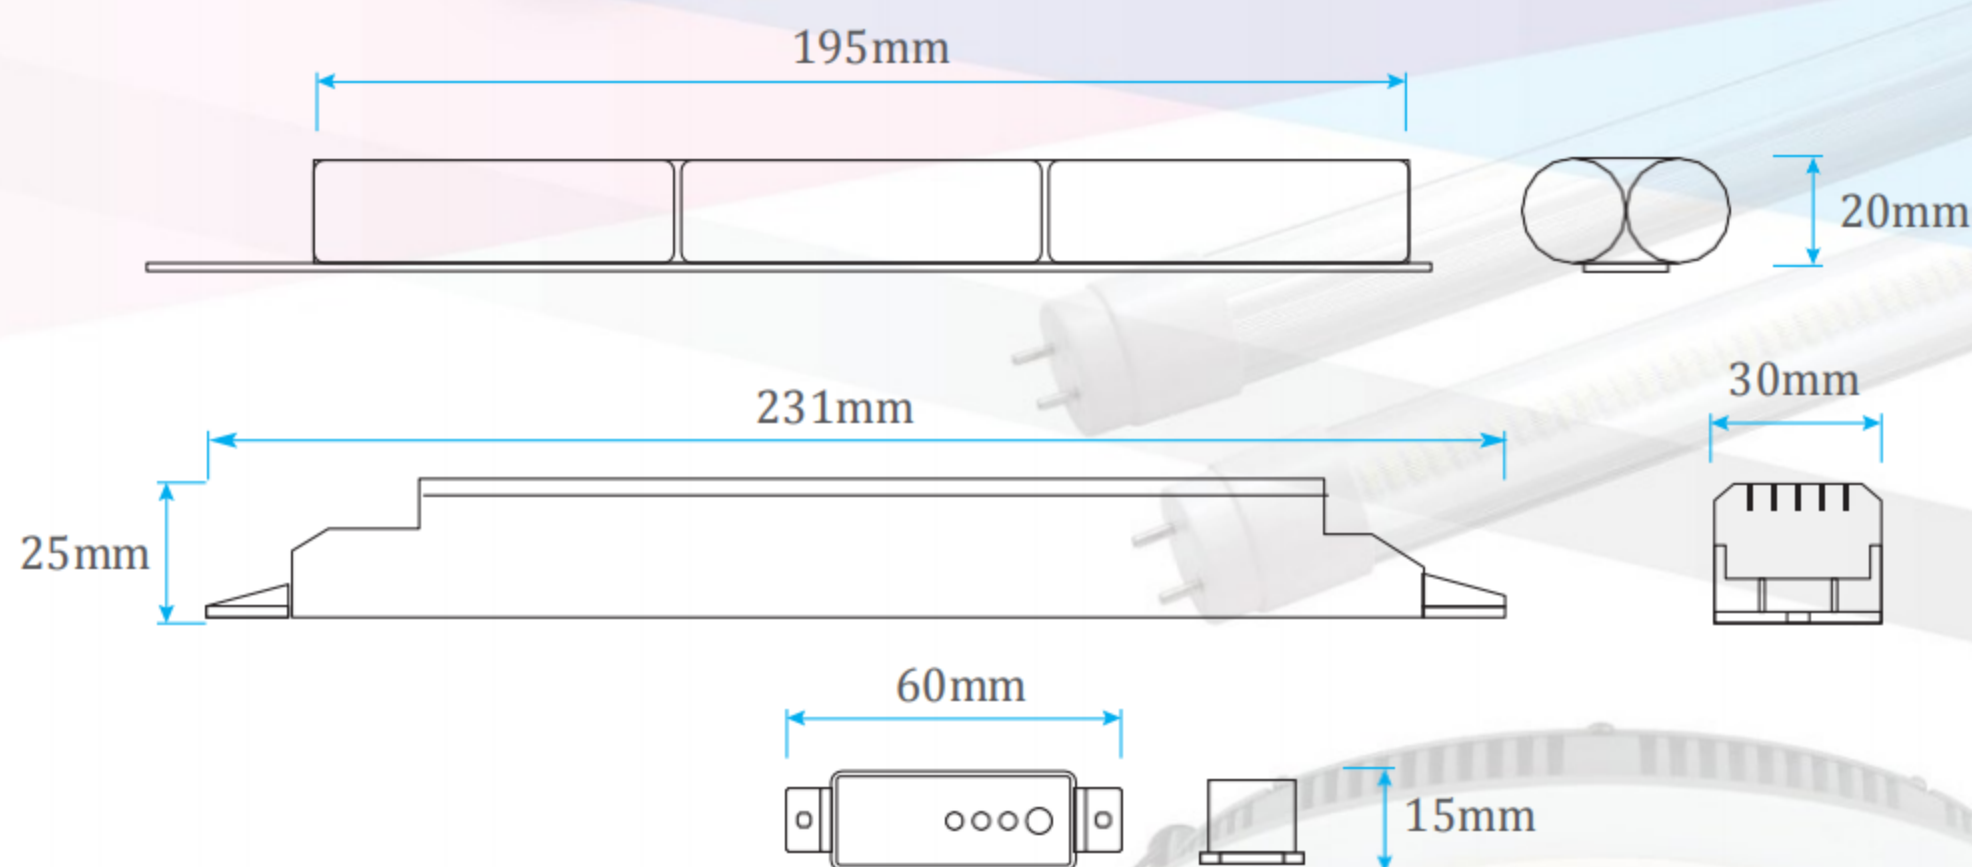

### SPECIFICATION

Mode of Operation

Input Voltage

Battery

Lamp Used

Charger

Charging Current

Indication (Red LED)

Indication (Green LED)

Indication (Yellow LED)

Backup Time

Safety Feature

IP Grade

Working Temp

Warranty

- ▶ Maintained / Non-maintained
- ▶ 220V-240V/50Hz
- ▶ 11.1V Environmental Friendly Lithium-ion Battery (5200mAh)
- ▶ LED Tube / LED Downlight / LED Eyeball / LED Bulb ( $\leq 24W$ )
- ▶ Constant Voltage and Constant Current Charging System
- ▶ 180 ~ 300 mA Lithium-ion 11.1V
- ▶ Indicates Charging
- ▶ Full Charge
- ▶ False/Faulty
- ▶ 3 Hours Duration
- ▶ Over Charge & over discharge protection
- ▶ IP 30
- ▶ 10°C ~ 50°C
- ▶ 1 year

