PRODUCT INFORMATION

Eightfold Sdn Bhd (200701017119) 69-1, Jalan SS19/6, 47500 Subang Jaya, Selangor Darul Ehsan, Malaysia Tel: 03-5612 8169

www.eightfold.com.my



WIRED ESB901B DISABLE TOILET EMERGENCY CALL SYSTEM

- MODEL: LIGHTHUB
- Regulatory compliance system to be use in disable toilet (OKU)
- Easy installation two wires system with detail wiring diagram provided
- Braille marked control buttons
- c/w Reset. Call Answered and Fault LED indicators
- Internal Rechargeable Battery (back up 2-3 hours standby approx 15-20 mins continuous alarm
- CE marked
- Competitive priced

Features:

- COMPLETE SINGLE ZONE KIT Includes Main Control
 Panel, Remote Reset & Indicator Panel, Alarm Pull Cord
 Switch, Over Door Indicator & Sounder, Disabled WC SelfAdhesive label, Inactive Sticker (for disabling the RESET
 button) and M3.5 Socket screws.
- REGULATION COMPLIANCE Assists in achieving compliance with the BS8300 requirement for an emergency assistance alarm, the Care Standards Act, the Disability Discrimination Act (DDA) and the English Tourism Council National Accessibility Scheme.
- **EASY TO INSTALL** This product has been designed for the simplest installation possible. The four easy to fit components make up this complete kit. 2-wired system
- BRAILLE MARKED control buttons
- · LED indicators and audio sound
- Call answer facility and reset button
- Volume control on panel
- Over discharge protection is built into the main panel
- Additional sounder terminal: 5-7Vdc



Kit Includes:

- 1 x Main Control Panel
- 1 x Remote Reset & Indicator Panel
 - 1 x Alarm Pull Cord Switch
- 1 x Over Door Indicator & Sounder Color:

ESB901B-B – BLUE ESB901B-R – RED

- 1 x Disabled WC Self-Adhesive label
- 1 pack x M3.5 Socket screws
- 1 x 9V Rechargeable battery



Specification:

Pull Cord Switch:

Power supply 230Vac / 50Hz Mains Fuse required 3 Amp **Earth Class** Class I (Must be Earthed) Internal PCB Fuse 1 Amp **Operating Temp** 5°C to 40°C (indoor use only) Backup Battery Ni-MH 9V 250mAh rechargeable Construction PVC Battery Run Time Standby: 2 hrs / Alarm: 20 mins **Dimensions: Noise Level:**

Main Control Panel:147 x 86.5 x 35mmMain Control Panel67dB (adjustable)Remote Control Panel:86.5 x 86.5 x 13mmRemote Reset Panel67dBOver Door Indicator:86.5 x 86.5 x 38mmOver Door Indicator80dB

Regulations Compliance: BS8300-2:2018/EN60950-1+A2:2013


89.5mm dia. x 26.5mm

PRODUCT INFORMATION

OPERATION:

ESB901B disabled toilet single zone alarm kit allows a person in distress to raise an alarm and request assistance in the event of an emergency. The system is setup so that the Pull Cord and the Remote Reset & Indicator Panel are located next to the toilet in the disabled WC. The Main Control Panel is located in a staffed area, where it is both visible and audible to the responsible person on duty. When the alarm is activated, the staff member can press the "Call Answered" button to inform the person in distress that assistance is on the way. The LED indicator on the Remote Reset & Indicator Panel will become illuminated and tone/frequency of the alarm will decrease. The alarm can also be reset from the Remote Reset & Indicator Panel. The Over Door Indicator & Sounder can be installed over the door of the disabled WC to draw further attention to the location of the person in distress.

INSTALLATION GUIDE:

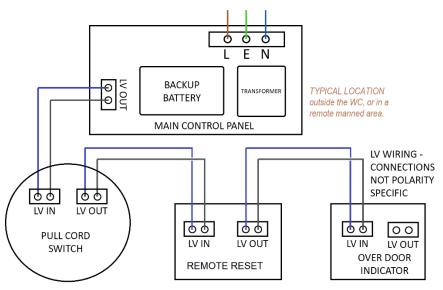

* Wiring with 0.75/1.0mm2 2-cores alarm cable

