

10 Channel Desktop Wireless Intercom





Power Port

Digital Code (A/B/C)



with back hole
for wall mounting

ANT(antennae)

vol-

vol+



Channel Number
(0-9)

Talk

MIC

Function Key

Support Power bank Supply



Convenient communication between different departments






- **Great for taking care children and elder**
- **Low power, it is safe for the baby and the pregnant woman**



How to set an intercom system

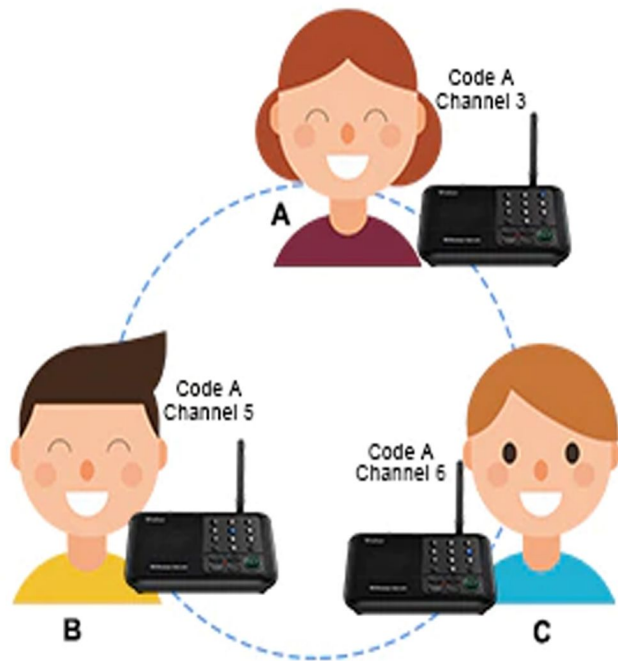

1st Step:

Set the channel and code for each station

Long press channel key to set your channel. Short press channel key to call other intercom station (A minute later will automatically restore the original channel). We suggest setting all the stations with the same code, then clicking other channels to communicate. You do not need to set a new code every time you call a different user.

2nd Step:

Distribute different station for different user

After you set a different channel for each user, please mark the channel for each user you wish to call. Then, distribute to each user. (Note: please keep intercom at least 5 meters away to avoid interference while setting different stations).

3rd Step:

Use it to communication with multi-functions

After every user has been assigned their intercom station, you can now make calls by simply clicking the channel of whom you wish to call.