

Super-Fast Mini Thermometer

with max/min & hold function

- fast response probe, 5 to 6 second readings
- easy to use, pocket-sized thermometer

The Super-Fast Mini is a pocket-sized, water resistant (IP65) thermometer that measures temperature over the range of -39.9 to 149.9 °C with a 0.1 °C/°F resolution. The instrument turns on automatically when the probe cover is removed, allowing for quick, easy temperature measurements.

The thermometer incorporates a fast response Ø2.5 x 73 mm stainless steel penetration probe with reduced tip and features a max/min and hold function. Each unit is powered by a CR2032 lithium coin cell battery and supplied with a probe cover with integral pocket clip.

reduced tip for fast response



order code	description
810-279	Super-Fast Mini thermometer



specification	Super-Fast Mini
range	-39.9 to 149.9 °C
resolution	0.1 °C/°F
accuracy	±0.5 °C (-9.9 to 99.9 °C)
battery & life	3 volt CR2032 - 5000 hours
sensor type	thermistor
display	8 mm LCD
dimensions	Ø25 x 150 mm
weight	20 grams

ThermoPop[®] Thermometer

with 360° rotating display


- backlit display & auto-power off function
- reduced tip, 5 to 6 second readings
- waterproof to IP66

The ThermoPop is a pocket-sized, waterproof (IP66) thermometer which incorporates a Ø3 x 114 mm stainless steel penetration probe with reduced tip.

The thermometer incorporates a unique 360° rotating display. Simply push a button to rotate the display in 90° increments, enabling the user to read the temperature in any position ie. left hand, right hand, vertical or horizontal.

The unit indicates temperature over the range of -50 to 300 °C with a 1 °C/°F resolution. Available in red, white or blue, each ThermoPop is supplied with a probe cover with integral pocket clip.

order code	description
810-301	ThermoPop thermometer - white
810-304	ThermoPop thermometer - red
810-305	ThermoPop thermometer - blue

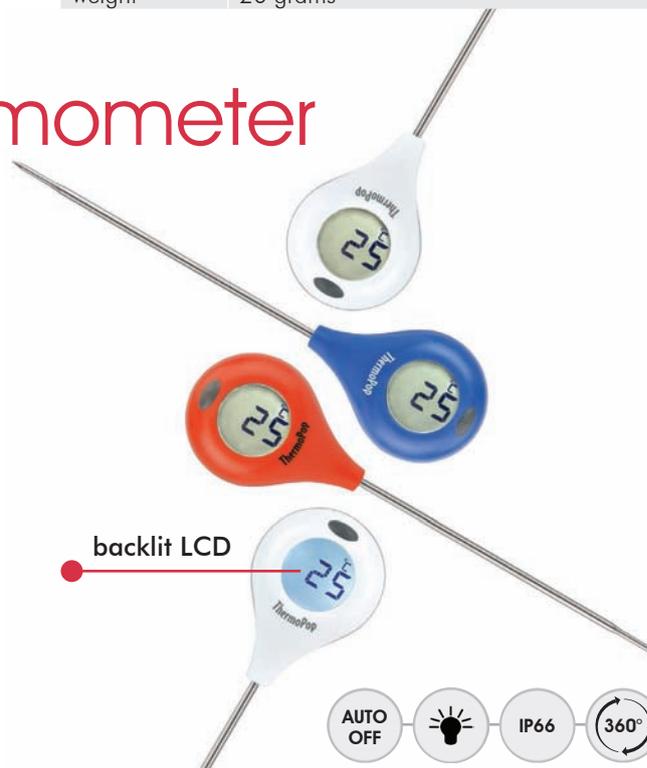

backlit LCD



specification	ThermoPop
range	-50 to 300 °C
resolution	1 °C/°F
accuracy	±1 °C (-20 to 120 °C)
battery & life	3 volt CR2032 - 5000 hours
display	9 mm LCD
dimensions	20 x 45 x 178 mm
weight	30 grams