


Maximise Your Space and Workflow

As a flexible modular system, DocuCentre S2520 is designed to save valuable office space and enhance your work environment. Choose a configuration that's perfectly tailored to your workflow requirements: a desktop set-up for personal or small group use, or a stand-alone device for easy access by multiple users, with an optional tray capacity of up to 500 sheets.

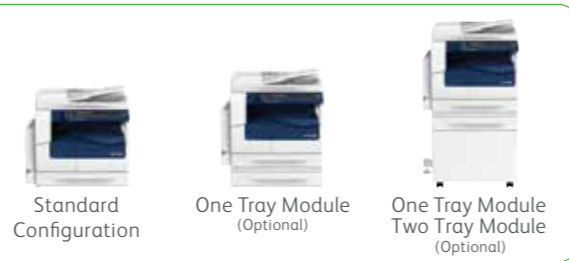

DocuCentre S2520 Functions & Specifications

Basic Function / Copy Function

Item	Description
Type	Desktop
Copy Speed	A4: 25ppm A3: 13ppm
Memory capacity	512 MB (Max : 512 MB)
Scan Resolution	600 x 600 dpi
Warm-up Time	19 seconds or less
Original Paper Size	Maximum of 297 x 432 mm (A3,11 x 17") for both Sheet and Book
Paper Size	Max: 297 x 432 mm, A3, 11 x 17", Bypass Tray: 297 x 432 mm, A3, 11 x 17"
	Min: A5, Bypass Tray: 127 x 98 mm
	Image loss width: Lead Edge : 5.5 mm, Trail Edge : 6.0 mm, Right & Left Edges : 5.5 mm
Paper Weight ¹	Tray 1: 60 to 90 gsm
	Tray 2, 3, 4 (Option): 60 to 216 gsm
	Bypass Tray: 60 to 216 gsm
Continuous Copy	Up to 999 sheets
First Copy Output Time	6.5 seconds or less (A4 LEF)
Copy Features	Automatic 2-sided copy, Reduce/enlarge, Background suppression, electronic sort, collation (rotate) ID card copy, N-up (2up/4up), Booklet creation, booklet creation, book copy, clone copy(platen only), poster copy(platen only), toner save mode, Auditron copy(up to 30 users)
Paper Tray Capacity ³	Standard: Tray1 : 250 sheets, Bypass Tray : 100 sheets
	Optional: One Tray Module (Tray2) : 500 sheets Two Tray Module (Tray3 + Tray4) : 500 sheets
	Max: 1850 sheets (Tray1 + Tray2 + Tray3 + Tray4 + Bypass Tray)
Output Tray Capacity ³	250 sheets (A4 LEF)
Output Paper Size	Max: Tray / Bypass : A3, up to 11" x 17"
	Min: Tray: A5, Bypass Tray: A5
	Image loss width: 5.5 mm max (top, Left, Right) ; 6.0mm max (bottom)
Machine Duty cycle (max per month)	Up to 37K pages
Power Source	AC220-240 V +/- 10 %, 6 A, 50 / 60 Hz common
Maximum Power Consumption	AC 220V: 1.3kW or less AC 240V: 1.4kW or less Low Power mode: 14W or less Sleep mode: 2W or less
Dimensions (W x D x H)	595 x 584 x 569 mm
Weight ⁴	33 kg

¹: It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement. ²: The speed may be reduced due to the image quality adjustment. The performance may be reduced depending on the paper type. ³: When Using 80 gsm paper. ⁴: Excluding Toner Cartridge.

Fax Function (Optional)

Item	Description
Send Document Size	Max : A3
Recording Paper Size	Max : A3, Min : A4
Transmission Time*	3 seconds range
Transmission Mode	Super G3 / G3 ECM / G3 (ITU-T)
Scanning Resolution	Std: 8 x 3.85 lines / mm, 200 x 100 dpi
	Fine: 8 x 7.7 lines / mm, 200 x 200 dpi
	SuperFine(400dpi): 16 x 15.4 lines / mm, 400 x 400 dpi
	SuperFine(600dpi): 16 x 15.4 lines / mm, 600 x 600 dpi
Coating Method	MH, MR, MMR, JBIG
Transmission Speed	G3: 33.6/31.2/28.8/26.4/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps
Applicable Lines	PSTN / PBX, 1 port
Fax Memory	4MB (400 pages)
Fax Features	Two sided fax/receive, fax forward to fax, PC Fax send, auto redial, last number redial, pause, Journal, confirmation report, auto dial list, junk fax barrier, up to 5 group dial location, boardcast fax, memory receive, speed dial up to 99 location

¹: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high-speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

Notes
1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
2) The product specifications, appearance and other details in this catalog are subject to change without notice for improvements.

Other company names or product names are registered trademarks or trademarks of each company.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

For more information or detailed product specifications, please call or email or visit our website at:

Fuji Xerox Asia Pacific Pte.Ltd. (993478-A)

(Fuji Xerox Printers)

1st Floor, No. 10, Jalan Bersatu 13/4,
46200 Petaling Jaya, Selangor, Malaysia.

Tel: 03-2191 1888 Fax: 03-7882 2767

Service Hotline : 1800 88 1063

www.fujixeroxprinters.com.my

East Malaysia Office:

199A-201, Lot 3049 & 3050, Eastmoore Centre,

2½ Mile, Jalan Rock, 93200 Kuching,

Sarawak, Malaysia.

Tel: 082-428 650 Fax: 082-418 733



Print Function

Item	Description
Type	Built-in type
Print Speed	A4: 25ppm A3: 13ppm
Print Resolution	600 x 600 dpi
Page Description Language	HBPL (Host Based Print Language)
Operation System ¹	Windows® XP (32bit), Windows Server® 2003 (32bit), Windows Vista® (32bit) Windows Server® 2008 (32bit), Windows® 7 (32bit), Windows® 8 (32bit) Windows® XP Professional (64bit), Windows Server® 2003 (64bit) Windows Vista® (64bit), Windows Server® 2008 (64bit), Windows® 7 (64bit) Windows Server® 2008 R2 (64bit), Windows® 8 (64bit) Windows Server® 2012 (64bit)
Interface	USB2.0, Ethernet 100BASE-TX / 10BASE-T
Print Features	Automatic Two-sided print, custom page size, toner save mode, watermark, fit to page, reduce/enlarge, poster, booklet print
Print Management	CentreWare Internet Service (CWIS)

¹: Please refer to the Fuji Xerox web site for the latest supported operating systems.

Scan Function

Item	Description
Type	Colour Scanner
Scan Resolution	Up to 600 x 600 dpi
Scan Speed [*]	B / W : 28 ppm, Colour (200 dpi) : 28 ppm
Interface	USB2.0, Ethernet 100BASE-TX / 10BASE-T
Scanning destination	Scan to PC / Network (SMB) / Email
Scan Features	TWAIN / WIA
Scan Format	Multipage TIFF, PDF, JPEG

^{*}: The scanning speed varies depending to documents. Fuji Xerox Standard Document (A4), 200 dpi, using TWAIN driver (USB).

Duplex Automatic Document Feeder (Build in)

Item	Description
Original Size	Max : A3, 11 x 17", Min : A5
Paper Weight	38 to 128 gsm (2 Sided) : 50 to 128 gsm)
Capacity ¹	110 sheets
Feeding Speed (A4 LEF Simplex)	25 ppm (A4 LEF, 1 Sided) 18 ppm (A4 LEF, 2 Sided)
Dimensions (W x D x H)	540 x 492 x 125 mm
Weight	8 kg

¹: When Using 80 gsm paper.

Options / Accessories

One Tray Module (500 sheets tray)	EL201138
Two Tray Module (2 x 500 sheets tray)	EC102050
Stand (cabinet, require one tray module)	EL200737
Tray Lock (for Tray 1 only)	EL201058
Fax Kit	EL201137

Consumables

Toner Cartridge (9k pages)**	CT202384
------------------------------	----------

Engineer replacement consumables***

Drum Cartridge (68K pages)	CT351075
Fuser Unit, 220V (175K pages)	126K34940

**Declared yield in accordance with ISO/IEC 19752, yield will vary based on image, area coverage and print mode.
***Please call service provider (1800-88-1063) for quotation and installation.

What comes in the box

Power cable (1.8m)
Starter toner, 3.5K pages
Drum cartridge, 68K pages



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

DocuCentre S2520 A3 Mono Multifunction Device



DocuCentre S2520

A3 Monochrome Multifunction Device

The perfect solution for small- and medium-sized businesses



DocuCentre S2520 shown with optional one tray module and two tray module.



A3 Monochrome Desktop Digital Multifunction Device Excellent functionality improved efficiency

A multifunction device with all the essentials for any office task. Compact and featuring superb performance, this new machine dramatically improves office efficiency.



DocuCentre S2520

Combining high productivity with eco-friendly operation.

Copy Print	B/W:25 ppm Max:A3	Scan	B/W:28 ppm Colour:28 ppm	Net Work	Ethernet 100BASE-TX/10BASE-T
-------------------	----------------------	-------------	-----------------------------	-----------------	---------------------------------

Colour Scan	Print	Copy	Fax#	Network	DADF	Duplex
--------------------	--------------	-------------	-------------	----------------	-------------	---------------

Speedy operation

Accelerate office workflows with high-speed output

Take advantage of high-speed copying at 25 pages/minute simplex and 18 pages/minute duplex. The ideal machine when in a rush, DocuCentre S2520 has a fast First Copy Output Time of 6.5 seconds and boasts a warm-up time of only 19 seconds.

#fax kit sold as option


Improve productivity with fast colour scanning

Enjoy fast scans at 28 pages/minute*. This significantly reduces time spent digitizing large documents to improve productivity.

Outstanding productivity features

Convenient ID card copy function

Both sides of a card can be copied onto one side of a sheet of paper. You can copy one or two cards at the same time.

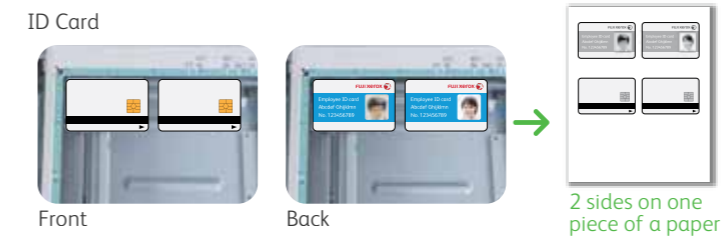

Alternating horizontal-vertical stacking

When outputting many copies of the same document — such as materials for meetings — each document can be stacked in alternating horizontal-vertical orientation to save time when collating.



Print and copy on heavy paper

Print certificates or greeting cards on 60-216 gsm paper. Printing can be easily customised for nearly any job, eliminating the need to outsource.

Fax more effectively. (Optional)

Send faxes quickly

Register up to 30 numbers for speed dialling. Legal-size documents can be received on one sheet.

Redial button

Pressing the redial button displays a list of recent transmissions. Simply select the desired recipient to resend a document.



Simple broadcast function

Quickly send a document to a group of recipients. This eliminates repetitive tasks when sending the same document to a multiple destinations.


Print multiple pages on one sheet

Different documents can be printed on either side of a piece of paper. Also, by reducing the size of documents, up to eight pages can be printed onto one sheet. This helps conserve paper.



Two scanning methods

Choose from two ways to scan, depending on where you are: Pull scan from a PC, or Push scan when at the device. When using Push scan, you can select a resolution between 200 and 600 dpi.

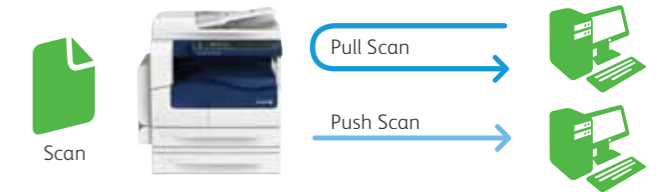

Eco friendly

Internationally recognized environmental compliance

The amount of ultrafine particles (UFPs*) emitted during continuous printing has been reduced by optimising operation settings.

* Ultrafine particles (UFPs) are tiny particulates less than 100 nanometres in diameter. They are far smaller than the PM2.5 particle class, the regulations for which are becoming stricter from an environmental perspective.

Eco friendly and energy saving

DocuCentre2320 has achieved 1.4 kWh*1 for TEC value*2, conforming to International Energy Star Program standards and reducing power consumption.

*1 1.5kWh: DocuCentre S2520.

*2 Value measured by the test defined in International Energy Star Program.

Adjustable toner output

Toner density is adjustable in six steps. Printing at lower density saves toner and helps reduce costs.

