




# Antistatic Oil Hose 20 Bar

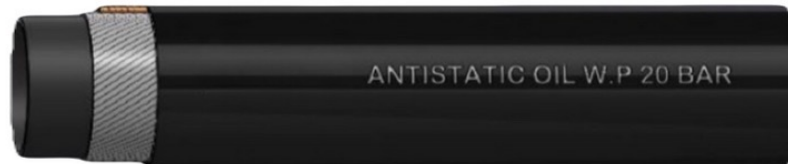

## Application

Suitable for the transfer of oil and petroleum based products.

Tube: Black color of NBR blend compound. Oil resistance.

Cover: Black color of NBR/PVC blend compound. Abrasion and weather resistance.

Reinforcement: High tensile synthetic yarn incorporated with copper wire.

Temperature: -20°C to +70°C

| Nominal<br>inch | I.D<br>(mm) | O.D<br>(mm) | Pressure (bar) |       | Weight<br>(Kg/m) | Length<br>(m) |
|-----------------|-------------|-------------|----------------|-------|------------------|---------------|
|                 |             |             | Working        | Burst |                  |               |
| 1/4"            | 6.3         | 15.0        | 20             | 60    | 0.233            | 100           |
| 5/16"           | 8.0         | 16.0        | 20             | 60    | 0.244            | 100           |
| 3/8"            | 9.5         | 18.0        | 20             | 60    | 0.299            | 100           |
| 1/2"            | 12.7        | 23.0        | 20             | 60    | 0.465            | 100           |
| 5/8"            | 16.0        | 26.0        | 20             | 60    | 0.531            | 100           |
| 3/4"            | 19.0        | 30.0        | 20             | 60    | 0.687            | 100           |
| 7/8"            | 22.0        | 33.0        | 20             | 60    | 0.773            | 100           |
| 1"              | 25.4        | 37.0        | 20             | 60    | 0.931            | 100           |