

## APPLICATION


- ❖ High quality RG Type Coaxial cable, 75 Ohm suitable for many applications, particularly broadcast and CCTV installations.

## PRODUCT FACTS

- ❖ INDOOR USE , Accepts 300m longer
- ❖ Suitable for shop-lot, home

## PRODUCT CODE

- ❖ RG59-DCOM-ST80-300M

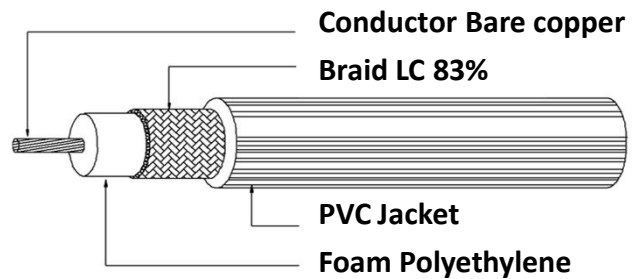

## TECHNICAL DATA

ITEM		UNIT	SPEC. VALUE
Inner Conductor	Material	---	Bare Copper
	Dia.(approx)	mm	0.65 ± 0.15
	Insulation	Material	---
	Nom. Thickness	mm	1.56 ± 0.18
	Dia.(approx)	mm	3.70 ± 0.18
	Colour	---	Natural
	Outer Conductor	Type	---
	Material	---	Aluminum LC
	Coverage	%	83 ± 3
	Dia.(approx)	mm	0.12 x 80
Jacket	Material	---	PVC
	Nom. Thickness	mm	0.80 ± 0.2
	Colour	---	Black
	Dia.(approx)	mm	5.90 ± 0.20
CHARACTERISTICS			
DC Conductor Resistance at 20°C			< 26.1Ω/100m
Insulation Resistance at 20°C			> 200 MΩ.m
Nominal Velocity of Propagation			66.6 ± 3%
Capacitance			67 ± 5 pF/m
Characteristic Impedance at 20°C, 200MHz			75 ± 5Ω
PACKING			WEIGHT
Wooden drum - 300x300x200(mm)	300m/drum		10.2.kg