




EU NIAN PRECISION TECHNOLOGY SDN. BHD. (629410-X)

友聯精準科技有限公司

No. 23, Jalan Ros Merah 2/7, Taman Johor Jaya, 81100 Johor Bahru, Johor, Malaysia.

Tel : +60-7-3538933, 3538533 Fax : +60-7-3539533 E-mail : admin@eunian.com

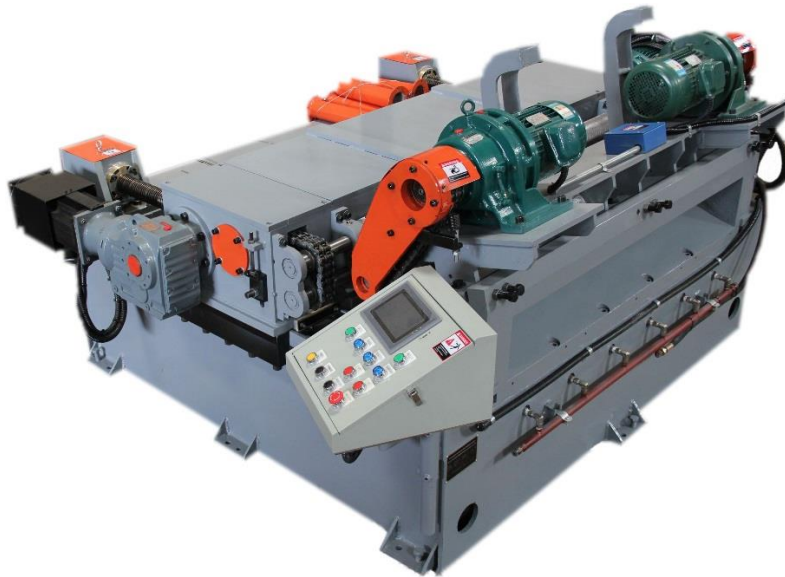

Spindleless Lathe

Specification

Machine	5ft Spindleless Lathe	9ft Spindleless Lathe
Model	SM5-SRF/SRV	SM9-SRF/SRV
Veneer Thickness	0.50mm to 3.80mm	
Veneer Thickness Accuracy	±8% to 10%	
Maximum Peeling Length	1500mm	2750mm
Nominal Peeling Diameter	350mm	
Maximum Peeling Diameter	360mm	
Minimum Log Core Diameter	40mm	
Maximum Peeling Speed	90m/min	
Machine Capacity	30 m ³ to 38m ³ per day (1.50mm, 16hrs machine run-time/day)	
Single Roller Motor	4kW AC Induction Motor x 2	5.5kW AC Induction Motor x 2
Single Roller Motor Driver	INVT 7.5kW Inverter	INVT 11kW Inverter
Single Roller Diameter	106mm	102mm
Single Roller Ridge Density	3.2 / 2.5	
Double Roller Motor	11kW AC Induction Motor	15kW AC Induction Motor
Double Roller Motor Driver	INVT 11kW Inverter	INVT 15kW Inverter
Double Roller Diameter	106mm	106mm
Double Roller Ridge Density	3.2 / 2.5	



EU NIAN PRECISION TECHNOLOGY SDN. BHD. (629410-X)

友 聯 精 準 科 技 有 限 公 司

No. 23, Jalan Ros Merah 2/7, Taman Johor Jaya, 81100 Johor Bahru, Johor, Malaysia.

Tel : +60-7-3538933, 3538533 Fax : +60-7-3539533 E-mail : admin@eunian.com

Model	SM5-SRF/SRV	SM9-SRF/SRV
Feed Screw Motor	7.5kW Yaskawa Servo Motor with 3-Phase Transformer	11kW Yaskawa Servo Motor with 3-Phase Transformer
Feed Screw Motor Driver	7.5kW Yaskawa Servopack with Braking Resistor	11kW Yaskawa Servopack with Braking Resistor
Feed Screw Diameter	70mm	
Knife Clamping Hydraulic System	Hydraulic Pump Motor: 7.5kW	
	Rated Oil Pressure: 21MPa	
	Rate Flow Rate: 23cm/min	
	Hydraulic Tank Capacity: 187.5 Litres	
Total Machine Power	34.0kW	44.5kW
Machine Dimension	3400mm x 2250mm x 1400mm	4600mm x 2250mm x 1400mm
Machine Weight	4500kg	7500kg