


VTK-VTO6210BW-VTH1560BW

7 Inch IP Kit

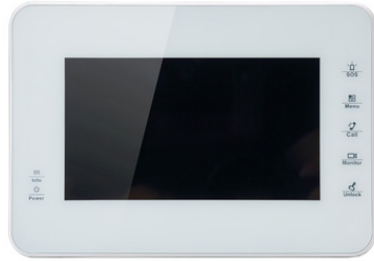

Technical Specification

Video Outdoor Station

Model	VTO6210BW
-------	-----------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/4" 1MP CMOS
Lens	3.6mm
Angle of View	D:70° H:60°
Day/Night	Color Image

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Operation Mode

Keypad	Single Touch Button
Reader	Mifare Card

Interface


Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1

Network

Ethernet	10M/100Mbps Self-adaptive
----------	---------------------------

Features

- HD CMOS camera
- 7-inch capacitive touch screen, resolution 800×480
- IPC surveillance
- Alarm integration
- 2-Door control
- Remote intercom with mobile APP

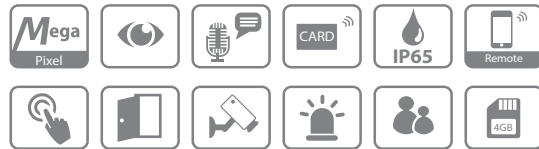

Network Protocol	TCP/IP
------------------	--------

General

Ingress Protection	IP65
Tamper Switch	1
Installation	Surface
Material	Tempered Glass
Power	DC 12V, or supply directly by VTNS1060A
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-30°C~+60°C
Relative Humidity	10%~90%RH
Dimensions	154.2mm×114.2mm×43.0mm
Weight	0.6Kg

Video Indoor Monitor

Model	VTH1560BW
-------	-----------

System

Main Processor	Embedded Micro Process
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
-------------------	-------

Audio

Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Display

VTK-VTO6210BW-VTH1560BW

LCD Screen	7" 800x480, Capacitive
Operation Mode	
Input	Touch buttons
Interface	
Alarm In	8
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD embedded, 4G
Installation	Flush
Power	DC 12V, or supply directly by VTNS1060A
Power Consumption	Standby $\leq 1.5W$, work $\leq 7W$
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	221.2mm×154.3mm×24.2mm

Kit



DHI-VTK-VTO6210BW-VTH1560BW

Application

