

#### **FEATURES:**

- 5MP Sony Super Lux Sensor Camera
- Ultra wide Viewing angle 160°
- Light source:12 LED, brightness is adjustable
- Low illumination: 0.001Lux @ F1.2
- Triangle wheel tray: 3 durable universal wheels
- Telescopic Pole: Cable is concealed, 1.95m when unfold, 0.62m when folded
- Metal monitor bracket: adjust the forward/back/left/right directions
- Monitor screen: 7-inch IPS screen 1024\*600 pixel with sun visor
- Monitor function: Video, Photo, Playback, Zoom
- Video record resolution: 1920\*1080
- Battery: Built-in 7500mAh high capacity Li-battery
- Working Time: 5-8 hours
- Storage: Max 128GB TF card
- Language: Supports multi-language
- Supports Power-saving Mode: automatic shutdown, automatic off-screen
- Automatic upgrade: Supports system automatic upgrade
- Heavy duty grade ABS equipment case

## **Ordering Information**

Model No	AZUVIC-500
Dimension (LxHxW)	
Gross Weight	8.5Kg
Product Box Size (mm)	68cm x 40cm x18.5cm
Carton Size; Qty/CTN	

# Precaution

- Forbid to use it in high temperature, high humidity environment.
- Please insert or pull out the TF card after monitor is powered off. If under working state, the huge current will bring unpredictable damage to the machine.
- DO NOT use this product to violate others' privacy. Monitoring others' activities without consent is illegal and this product is not designed and manufactured for such purpose.

# **5MP Under Vehicle Inspection Camera**




MODEL	AZUVIC-500
MODEL	Inspection Camera
Image Sensor	5MP SONY Image Sensor
Light source	12 pcs LED lamps, adjustable brightness
Sensitivity	0.001Lux / F1.2
Lens & View angle	3.6mm F1.2 (H )160 °
Video Output	HD-TVI
Connector	4 pin waterproof connector
Dimension	43.5mm /62.5mm x 33mm
Cable	4-core Coaxial cable concealed in pole
Wheel Tray	
Wheels	Reinforced triangular design with 3 wheels
Size(L*W*H)	29cm x 22cm x 9.5cm
Weight	0.98KG
Telescopic Pole Camera	
Length	Folded length: 62cm Constriction Length:143cm Unfold length:195cm
Weight	1.38KG
7 inch Monitor with Recording	
Size of the screen	7inch LCD Screen
Resolution	1024*600 Pixel
Brightness	500 cd/m²
Video Input	1080P HD-TVI
Response	<0.1s
Power Output	12V 300MA
LED Light control	4 level
Effective Pixels (16:9)	1920* 1080
Video Compression Format	H.264
Video Storage	AVI
Operation System	Windows & Mac OS
Port	USB 2.0/AV-OUT
Language	Multiple
Voltage	DC :7-24V USB DC:5V
AC Adapter	DC5-12V 2A
Built-in Battery	Li-battery 5500mAh
External SD card	TF card Max 128GB supported
Dimension	177mm x120mm x 32mm(with Sunshade Cover)
Weight	0.39KG/0.5KG(with Sunshade Cover)

Specifications subject to change without notice.  $\ensuremath{\texttt{@}}$  2019.All rights reserved.

### **PACKAGE INCLUDED**





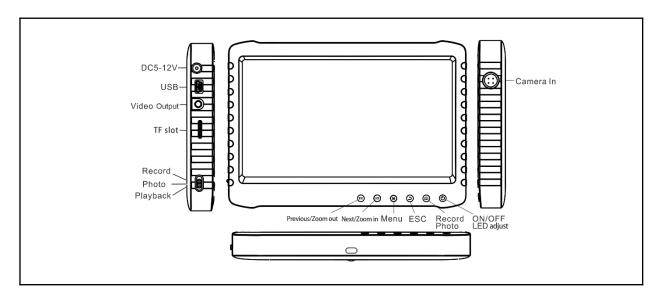

- √ 7inch Monitor\*1
- √ 7inch Sunshade \*1
- ✓ Wheel tray camera \*1
- ✓ Telescopic pole with bracket\*1
- ✓ AC adapter \*1
- ✓ USB cable \*1
- ✓ Stand \*2
- ✓ User manual \*1
- √ Packaging Case \*1

Tel: +603 9285 8177 Fax: +603 2857 6177 Email: sales@azsecu.com