

RG59 E64 COAXIAL CABLE

APPLICATION

❖ High quality RG Type Coaxial cable,75 Ohm suitable for many applications, particularly broadcast and CATV installations.


PRODUCT FACTS

- ❖ INDOOR USE, Accepts 100m longer
- ❖ Suitable for shop-lot, home

PRODUCT CODE

- ❖ RG59-DCOM-E64-100M
- ❖ RG59-DCOM-E64-300M

TECHNICAL DATA

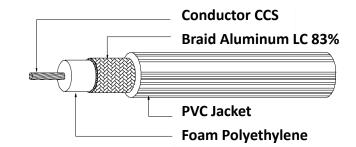

| ITEM | | UNIT | SPEC. VALUE |
|---|----------------|------|-------------------|
| Inner Conductor | Material | | Copper Clad Steel |
| | Dia.(approx) | mm | 0.81 ± 0.015 |
| Insulation | Material | | Foam Polyethylene |
| | Nom. Thickness | mm | 1.56 ± 0.18 |
| | Dia.(approx) | mm | 3.70 ± 0.18 |
| | Colour | | Natural |
| Outer Conductor | Туре | | Braid |
| | Material | | Aluminum LC |
| | Coverage | % | 58 ± 3 |
| | Dia.(approx) | mm | 0.12 x 64 |
| Jacket | Material | | PVC |
| | Nom. Thickness | mm | 0.80 ± 0.2 |
| | Colour | | Black |
| | Dia.(approx) | mm | 5.90 ± 0.20 |
| CHARACTERISTICS | | | |
| DC Conductor Resistance at 20°C | | | < 26.1Ω/100m |
| Insulation Resistance at 20°C | | | > 200 MΩ.m |
| Nominal Velocity of Propagation | | | 85 ± 3% |
| Capacitance | | | 52 ± 5 pF/m |
| Characteristic Impedance at 20°C,200MHz | | | 75 ± 5Ω |
| PACKING | | | WEIGHT |
| Wooden drum - 300x300x200(mm) | 300m/drum | | 9.8.kg |